

Precision Gearheads

			Page
03A	Planetary Gearheads	0,88 mNm	372
06A	Planetary Gearheads	25 mNm	373
06/1	Planetary Gearheads	25 mNm	374
08/1	Planetary Gearheads	60 mNm	375
08/2	Spur Gearheads	15 mNm	376
08/3	Spur Gearheads, zero backlash	15 mNm	377
10/1	Planetary Gearheads	0,1 Nm	378
12/3	Spur Gearheads	0,03 Nm	379
12/4	Planetary Gearheads	0,3 Nm	380
12/5	Spur Gearheads, zero backlash	0,03 Nm	381
13A	Planetary Gearheads	0,18 Nm	382
14/1	Planetary Gearheads	0,3 Nm	383
15A	Planetary Gearheads	0,25 Nm	384
15/5	Spur Gearheads	0,1 Nm	385
15/5 S	Spur Gearheads	0,1 Nm	386
15/8	Spur Gearheads, zero backlash	0,1 Nm	387
15/10	Planetary Gearheads	0,35 Nm	388
16A	Spur Gearheads	0,03 Nm	389
16/5	Spur Gearheads	0,1 Nm	390
16/5 S	Spur Gearheads	0,1 Nm	391
16/7	Planetary Gearheads	0,3 Nm	392
16/8	Spur Gearheads, zero backlash	0,1 Nm	393
17/1	Planetary Gearheads	0,55 Nm	394
20/1R	Planetary Gearheads	0,8 Nm	395
22E	Planetary Gearheads	0,6 Nm	396
22EV	Planetary Gearheads	1,2 Nm	397
22F	Planetary Gearheads	1 Nm	398
22/2	Spur Gearheads	0,1 Nm	399
22/5	Spur Gearheads, zero backlash	0,1 Nm	400
22/7	Planetary Gearheads	0,7 Nm	401
23/1	Planetary Gearheads	0,7 Nm	402
26A	Planetary Gearheads	1 Nm	403
26/1	Planetary Gearheads	3,5 Nm	404
26/1R	Planetary Gearheads	3,5 Nm	405
30/1	Planetary Gearheads	4,5 Nm	406
30/1 S	Planetary Gearheads	4,5 Nm	407
32A	Planetary Gearheads	4,5 Nm	408
32ALN	Planetary Gearheads	4,5 Nm	409
32/3	Planetary Gearheads	7 Nm	410
32/3R	Planetary Gearheads	7 Nm	411
38A	Planetary Gearheads	20 Nm	412
38/1	Planetary Gearheads	10 Nm	413
38/1 S	Planetary Gearheads	10 Nm	414
38/2	Planetary Gearheads	10 Nm	415
38/2 S	Planetary Gearheads	10 Nm	416
44/1	Planetary Gearheads	16 Nm	417

FAULHABER GPT

			Page
	Portfolio description		418 – 419
NEW	22GPT	Planetary Gearheads	426 – 427
NEW	32GPT	Planetary Gearheads	428 – 429
NEW	42GPT	Planetary Gearheads	430 – 431



Precision Gearheads

Technical Information

General information

Life performance

The operational lifetime of a reduction gearhead and motor combination is determined by:

- Input speed
- Output torque
- Operating conditions
- Environment and Integration into other systems

Since a multitude of parameters prevail in any application, it is nearly impossible to state the actual lifetime that can be expected from a specific type of gearhead or motor-gearhead combination. A number of options to the standard reduction gearheads are available to increase life performance: ball bearings, all metal gears, reinforced lubrication etc.

Bearings – Lubrication

Gearheads are available with a range of bearings to meet various shaft loading requirements: sintered sleeve bearings, ball bearings and ceramic bearings. Where indicated, ball bearings are preloaded with spring washers of limited force to avoid excessive current consumption.

A higher axial shaft load or shaft pressfit force than specified in the data sheets will neutralise the preload on the ball bearings.

The satellite gears in the 38/1-2 Series Planetary Gearheads are individually supported on sintered sleeve bearings. In the 38A and 44/1 Series, the satellite gears are individually supported on needle or ball bearings.

All bearings are lubricated for life. Relubrication is not necessary and not recommended. The use of non-approved lubricants on or around the gearheads or motors can negatively influence the function and life expectancy.

The standard lubrication of the reduction gears is such as to provide optimum life performance at minimum current consumption at no-load conditions. For extended life performance, all metal gears and heavy duty lubrication are available. Specially lubricated gearheads are available for operation at extended temperature environments and under vacuum.

Notes on technical datasheet

Unspecified tolerances

Tolerances in accordance with ISO 2768 medium.

\leq	6	=	$\pm 0,1$ mm
\leq	30	=	$\pm 0,2$ mm
\leq	120	=	$\pm 0,3$ mm

Input speed

The recommended maximum input speed for continuous operation serves as a guideline. It is possible to operate the gearhead at higher speeds. However, to obtain optimum life performance in applications that require continuous operation and long life, the recommended speed should be considered.

Ball bearings

Ratings on load and lifetime, if not stated, are according to the information from the ball bearing manufacturers.

Operating temperature range

Standard range as listed on the data sheets.
Special executions for extended temperature range available on request.

Reduction ratio

The listed ratios are nominal values only, the exact ratio for each reduction gearhead can be calculated by means of the stage ratio applicable for each type.

Output torque

Continuous operation.

The continuous torque provides the maximum load possible applied to the output shaft; exceeding this value will reduce the service life.

Intermittent operation.

The intermittent torque value may be applied for a short period. It should be for short intervals only and not exceed 5% of the continuous duty cycle.

Direction of rotation, reversible

All gearheads are designed for clockwise and counter-clockwise rotation. The indication refers to the direction of rotation as seen from the shaft end, with the motor running in a clockwise direction.

Backlash

Backlash is defined by the amount by which the width of a tooth space exceeds the width of the engaging tooth on the pitch circle. Backlash is not to be confused with elasticity or torsional stiffness of the system.

The general purpose of backlash is to prevent gears from jamming when making contact on both sides of their teeth simultaneously. A small amount of backlash is desirable to provide for lubricant space and differential expansion between gear components. The backlash is measured on the output shaft, at the last geartrain stage.

Precision Gearheads

Technical Information

Zero Backlash Gearheads

The spur gearheads, series 08/3, 12/5, 15/8, 16/8 and 22/5, with dual pass geartrains feature zero backlash when pre-loaded with a FAULHABER DC-Micromotor.

Preloaded gearheads result in a slight reduction in overall efficiency and load capability.

Due to manufacturing tolerances, the preloaded gearheads could present higher and irregular internal friction torque resulting in higher and variable current consumption in the motor.

However, the unusual design of the FAULHABER zero backlash gearheads offers, with some compromise, an excellent and unique product for many low torque, high precision positioning applications.

The preloading, especially with a small reduction ratios, is very sensitive. This operation is achieved after a defined burn-in in both directions of rotation. For this reason, gearheads with pre-loaded zero backlash are only available when factory assembled to the motor.

The true zero backlash properties are maintained with new gearheads only. Depending on the application, a slight backlash could appear with usage when the gears start wearing. If the wearing is not excessive, a new preload could be considered to return to the original zero backlash properties.

Assembly instructions

It is strongly recommended to have the motors and gearheads factory assembled and tested. This will assure perfect matching and lowest current consumption.

The assembly of spur and hybrid gearheads with motors requires running the motor at very low speed to ensure the correct engagement of the gears without damage.

The planetary gearheads must not be assembled with the motor running. The motor pinion must be matched with the planetary input-stage gears to avoid misalignment before the motor is secured to the gearhead.

When face mounting any gearhead, care must be taken not to exceed the specified screw depth. Driving screws beyond this point will damage the gearhead. Gearheads with metal housing can be mounted using a radial set screw.

How to select a Precision Gearhead

This section gives an example of a step-by-step procedure on how to select a reduction gearhead.

Application data

The basic data required for any given application are:

Required torque	<i>M</i>	[mNm]
Required speed	<i>n</i>	[min ⁻¹]
Duty cycle	<i>δ</i>	[%]
Available space, max.	diameter/length	[mm]
Shaft load	radial/axial	[N]

The assumed application data for the selected example are:

Output torque	<i>M</i>	=	120 mNm
Speed	<i>n</i>	=	30 min ⁻¹
Duty cycle	<i>δ</i>	=	100%
Space dimensions, max.	diameter	=	18 mm
	length	=	60 mm
Shaft load	radial	=	20 N
	axial	=	4 N

To simplify the calculation in this example, the duty cycle is assumed to be continuous operation.

Preselection

A reduction gearhead which has a continuous output torque larger than the one required in the application is selected from the catalogue.

If the required torque load is for intermittent use, the selection is based on the output torque for intermittent operation.

The shaft load, frame size and overall length with the motor must also meet the minimum requirements.

The product selected for this application is the planetary gearhead, type 16/7.

Output torque, continuous operation	<i>M</i> _{max.}	= 300 mNm
Recommended max. input speed for		
– Continuous operation	<i>n</i>	≤ 5 000 min ⁻¹
– Shaft load, max.	radial	≤ 30 N
	axial	≤ 5 N

Calculation of the reduction ratio

To calculate the theoretical reduction ratio, the recommended input speed for continuous operation is divided by the required output speed.

$$i_N = \frac{\text{Recommended max. input speed}}{\text{required output speed}}$$

From the gearhead data sheet, a reduction ratio is selected which is equal to or less than the calculated one.

For this example, the reduction ratio selected is 159 : 1.

Calculation of the input speed n_{input}

$$n_{input} = n \cdot i \quad [\text{min}^{-1}]$$

$$n_{input} = 30 \cdot 159 = 4\,770 \quad \text{min}^{-1}$$

Calculation of the input torque M_{input}

$$M_{input} = \frac{M \cdot 100}{i \cdot \eta} \quad [\text{mNm}]$$

The efficiency of this gearhead is 60%, consequently:

$$M_{input} = \frac{120 \cdot 100}{159 \cdot 60} = 1,26 \quad \text{mNm}$$

The values of

Input speed	n_{input}	= 4 770	min^{-1}
and			
Input torque	M_{input}	= 1,26	mNm

are related to the motor calculation.

The motor suitable for the gearhead selected must be capable of producing at least two times the input torque needed.

For this example, the DC-Micromotor type 1624E024S supplied with 14 VDC will produce the required speed and torque.

For practical applications, the calculation of the ideal motor-gearhead drive is not always possible.

Detailed values on torque and speed are usually not clearly defined.

It is recommended to select suitable components based on a first estimation, and then test the units in the application by varying the supply voltage until the required speed and torque are obtained.


Recording the applied voltage and current at the point of operation, along with the type numbers of the test assembly, we can help you to select the ideal motor-gearhead.

The success of your product will depend on the best possible selection being made!

For confirmation of your selection and peace of mind, please contact our sales engineers.

Precision Gearheads

Planetary Gearheads

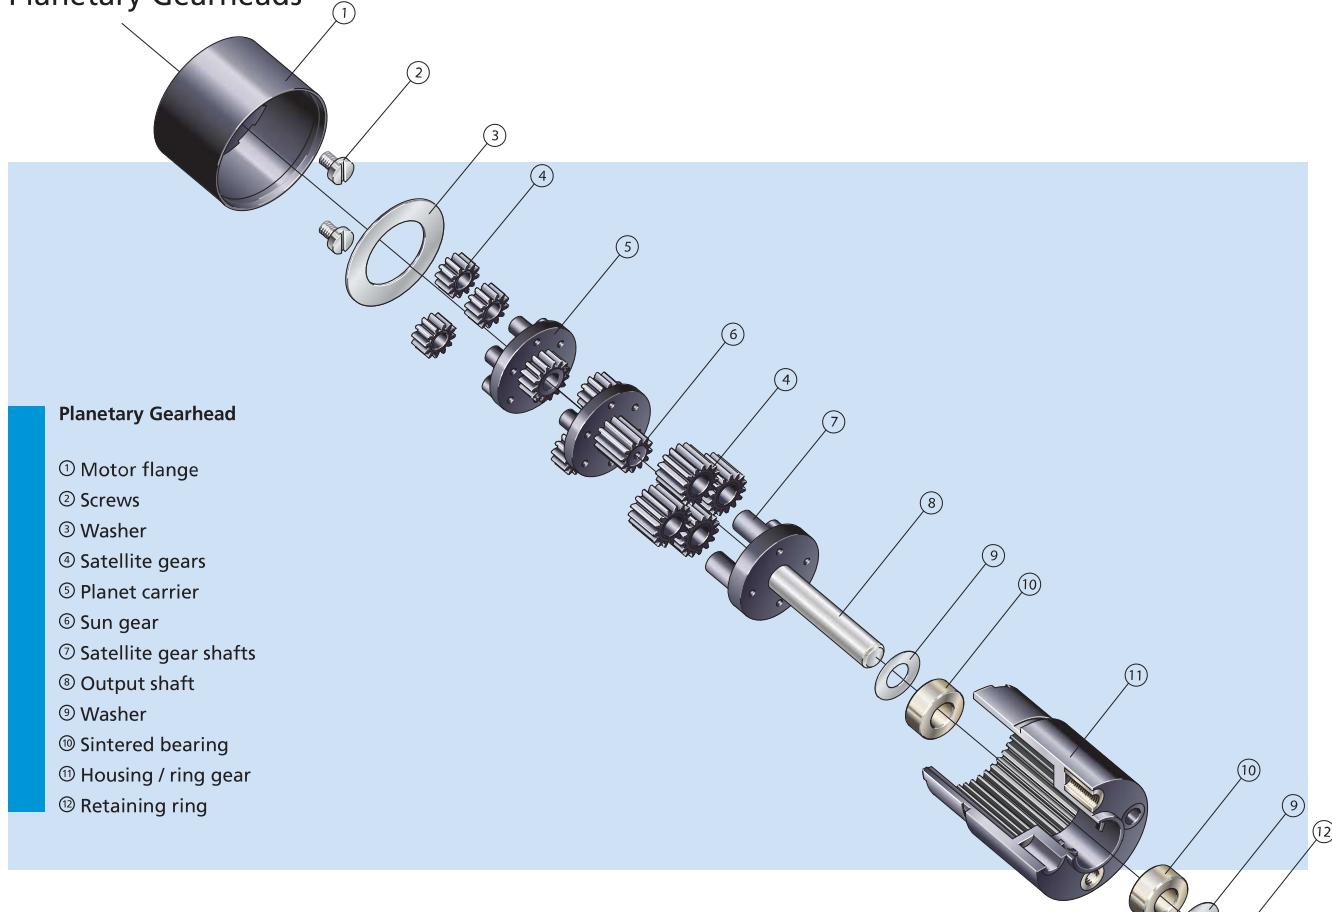

Features

Their robust construction make the planetary gearheads, in combination with FAULHABER DC-Micromotors, ideal for high torque, high performance applications.

In most cases, the geartrain of the input stage is made of plastic to keep noise levels as low as possible at higher speed. All steel input gears as well as a modified lubrication are available for applications requiring very high torque, vacuum, or higher temperature compatibility.

For applications requiring medium to high torque FAULHABER offers planetary gearheads constructed of high performance plastics. They are ideal solutions for applications where low weight and high torque density play a decisive role. The gearhead is mounted to the motor with a threaded flange to ensure a solid fit.

Benefits

- Available in all plastic or metal versions
- Use of high performance plastic and ceramic materials
- Available with a variety of shaft bearings including sintered, ceramic, and ball bearings
- Modified versions for extended temperature and special environmental conditions are available
- Custom modifications available

Product code



All metal planetary
gearhead series 12/4




26 Outer diameter [mm]
A Version
64:1 Reduction ratio

26A 64:1

Precision Gearheads

Spur Gearheads

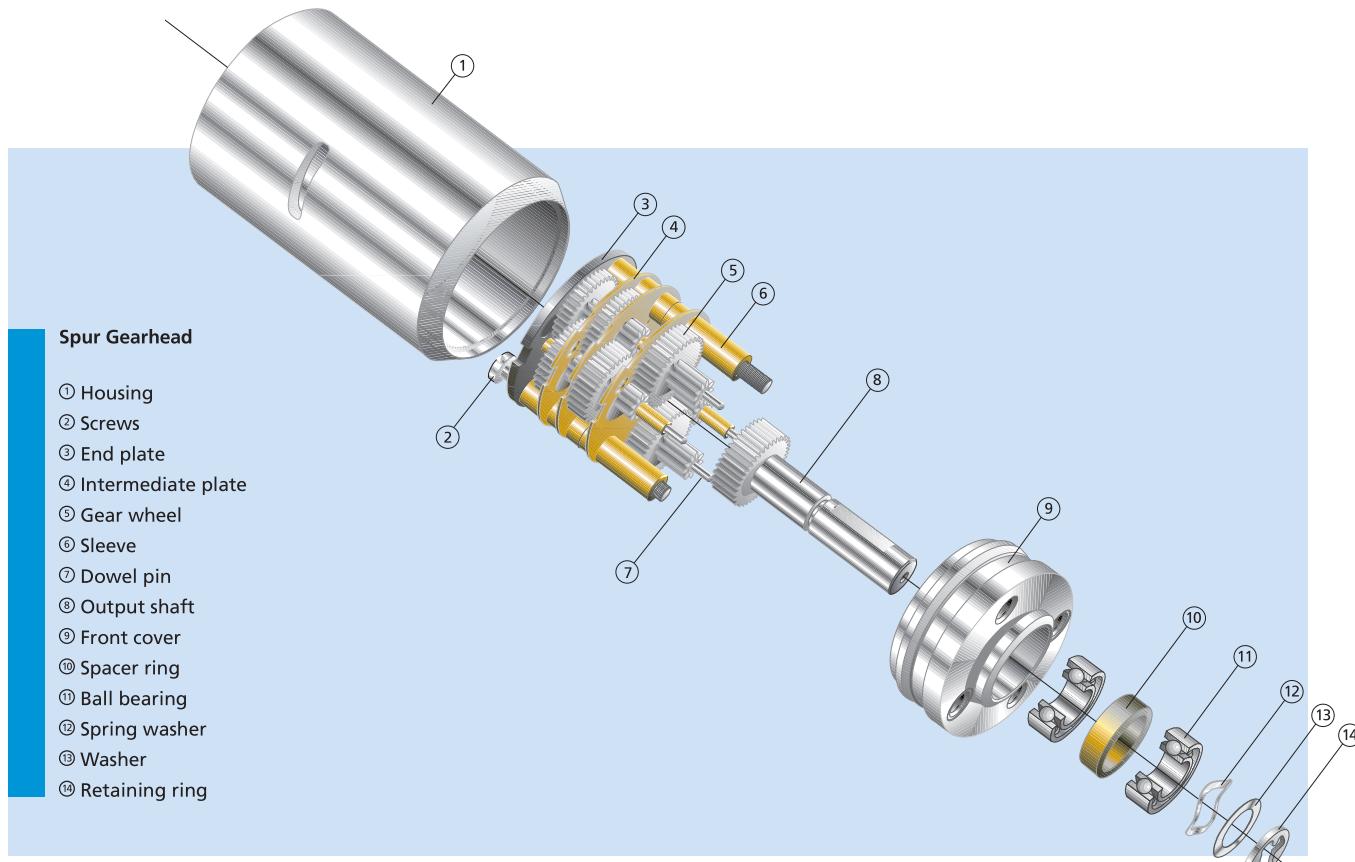


Features

A wide range of high quality spur gearheads are available to compliment FAULHABER DC-Micromotors.

The all metal or plastic input-stage geartrain assures extremely quiet running. The precise construction of the gearhead causes very low current consumption in the motor, giving greater efficiency. The gearhead is sleeve mounted on the motor, providing a seamless in-line fit. The FAULHABER Spur Gearheads are ideal for high precision, low torque and low noise applications.

gear passes to each other and locking them in place on the motor pinion gear. They are ideal for positioning applications with a very high resolution and moderate torque. Zero backlash gearheads can only be delivered preloaded from the factory.



Zero Backlash Spur Gearhead

- ① Motor pinion
- ② Dual-pass geartrain input stage
- ③ Zero backlash preloaded engagement

FAULHABER offers a special version of a spur gearhead with zero backlash. These gearheads consist of a dual pass spur geartrain with all metal gears. The backlash is reduced to a minimum by counter-rotating the two individual

Benefits

- Available in a wide variety of reduction ratios including very high ratios
- Zero backlash versions are available
- Available with a variety of shaft bearings including sintered, ceramic, and ball bearings

Product code



22 Outer diameter [mm]
/5 Version
377:1 Reduction ratio

22/5 377:1

Micro Planetary Gearheads

0,88 mNm

For combination with
Brushless DC-Motors

Series 03A


	03A	
Housing material	plastic	
Geartrain material	steel	
Recommended max. input speed for:		
– continuous operation	15 000 min ⁻¹	
Backlash, at no-load	≤ 4 °	
Bearings on output shaft	bronze	
Shaft load, max.:		
– radial (2 mm from mounting face)	≤ 0,1 N	
– axial	≤ 0,2 N	
Shaft press fit force, max.	≤ 1 N	
Shaft play		
– radial (2 mm from mounting face)	≤ 0,07 mm	
– axial	≤ 0,15 mm	
Operating temperature range	- 20 ... + 60 °C	

Technical data

Number of gear stages	2	3
Continuous torque	mNm	0,28
Intermittent torque	mNm	0,42
Mass without motor, ca.	g	0,2
Efficiency, max.		-
Direction of rotation, drive to output	=	=
Reduction ratio (exact)	25:1	125:1
L2 [mm] = length without motor	6,0	6,0
L1 [mm] = length with motor 0308A...B	12,6	12,6

Note: These gearheads are available only with motors mounted.

Scale enlarged 



Micro Planetary Gearheads

25 mNm

For combination with
Brushless DC-Motors


Series 06A

	06A		
Housing material	plastic		
Geartrain material	bronze		
Recommended max. input speed for:			
– continuous operation	15 000 min ⁻¹		
Backlash, at no-load	≤ 4 °		
Bearings on output shaft	bronze		
Shaft load, max.:			
– radial (3 mm from mounting face)	≤ 0,3 N		
– axial	≤ 0,5 N		
Shaft press fit force, max.	≤ 2 N		
Shaft play			
– radial (3 mm from mounting face)	≤ 0,05 mm		
– axial	≤ 0,1 mm		
Operating temperature range	- 20 ... + 60 °C		

Technical data

Number of gear stages	2	3	4	
Continuous torque	mNm	1,2	6	25
Intermittent torque	mNm	1,8	9	37,5
Mass without motor, ca.	g	1,24	1,32	1,4
Efficiency, max.		-	-	-
Direction of rotation, drive to output		=	=	=
Reduction ratio (exact)		25:1	125:1	625:1
L2 [mm] = length without motor		11,0	11,0	12,7
L1 [mm] = length with motor 0515A...B		22,8	22,8	24,5

Note: These gearheads are available only with motors mounted.

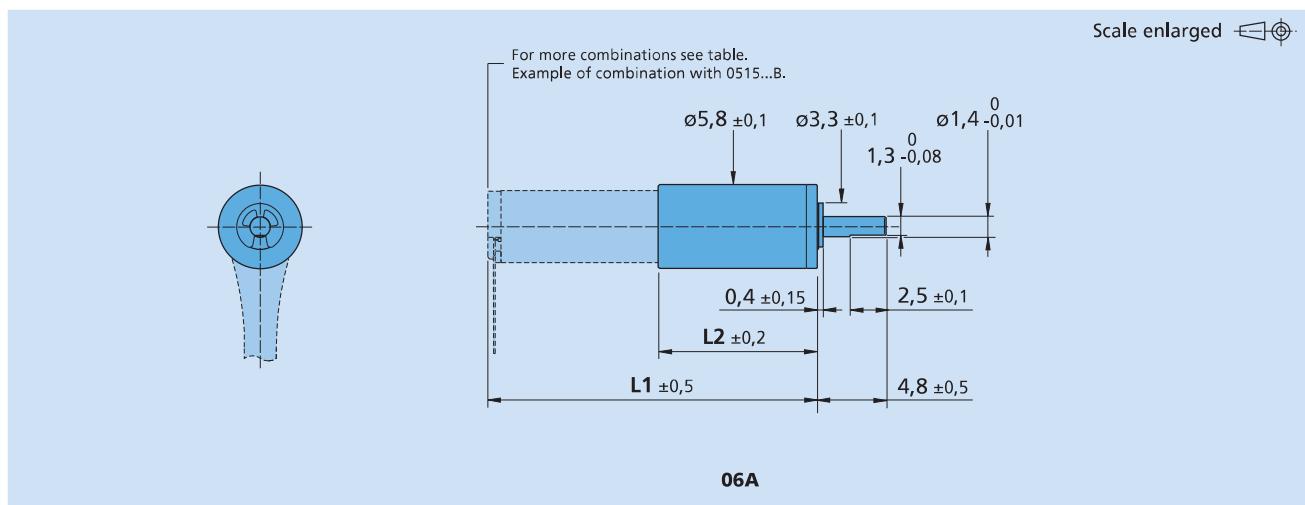

Planetary Gearheads

25 mNm


For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 06/1

	06/1	06/1K
Housing material	steel	steel
Geartrain material	steel	steel
Recommended max. input speed for:		
- continuous operation	8 000 min ⁻¹	8 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings
Shaft load, max.:		
- radial (3,5 mm from mounting face)	≤ 0,5 N	≤ 5 N
- axial	≤ 0,5 N	≤ 3 N
Shaft press fit force, max.	≤ 3,5 N	≤ 5 N
Shaft play		
- radial (3,5 mm from mounting face)	≤ 0,06 mm	≤ 0,06 mm
- axial	≤ 0,1 mm	≤ 0,05 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	6
Continuous torque	mNm	25	25	25	25	25
Intermittent torque	mNm	35	35	35	35	35
Mass without motor, ca.	g	2	2,8	3,4	4	4,4
Efficiency, max.	%	90	80	70	60	55
Direction of rotation, drive to output		=	=	=	=	=
Reduction ratio (exact)		4:1	16:1	64:1	256:1	1 024:1
L2 [mm] = length without motor		9,2	11,9	14,6	17,3	20,0
L1 [mm] = length with motor	0615C...S	24,2	26,9	29,6	32,3	35,0
	0515C...B	23,8	26,5	29,2	31,9	34,6
	0620C...B	29,2	31,9	34,6	37,3	40,0
	DM0620...35	18,7	21,4	24,1	26,8	29,5

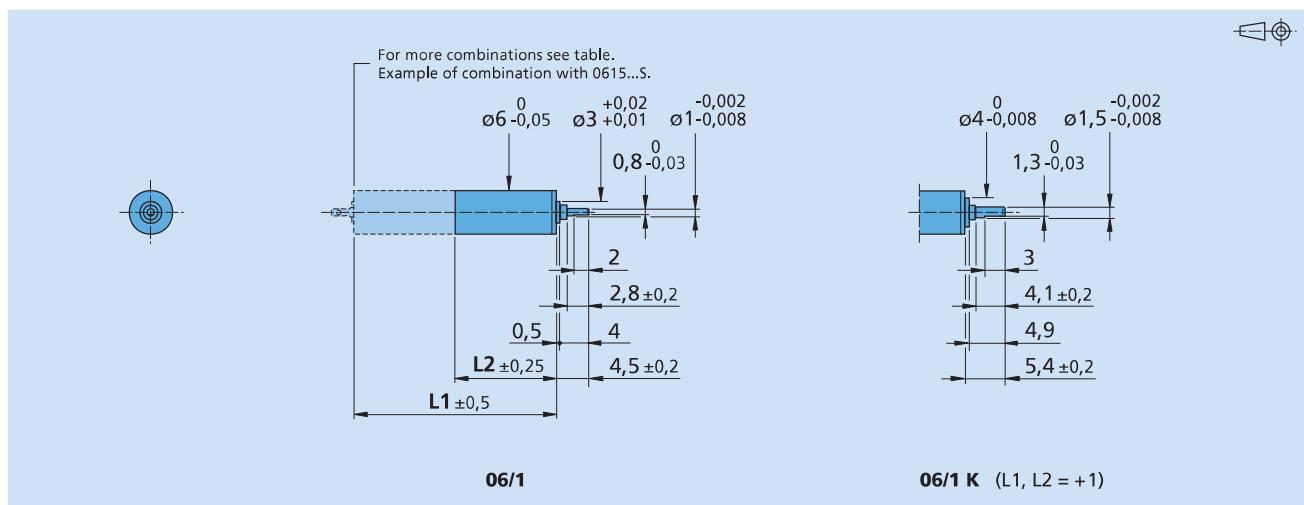

Planetary Gearheads

60 mNm


For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 08/1

	08/1	08/1K
Housing material	metal	metal
Geartrain material	steel	steel
Recommended max. input speed for:		
- continuous operation	8 000 min ⁻¹	8 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings
Shaft load, max.:		
- radial (4,5 mm from mounting face)	≤ 0,8 N	≤ 5 N
- axial	≤ 1 N	≤ 3 N
Shaft press fit force, max.	≤ 5 N	≤ 5 N
Shaft play		
- radial (4,5 mm from mounting face)	≤ 0,06 mm	≤ 0,06 mm
- axial	≤ 0,1 mm	≤ 0,05 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	6
Continuous torque	mNm	60	60	60	60	60
Intermittent torque	mNm	120	120	120	120	120
Mass without motor, ca.	g	2,9	3,8	4,6	5,4	6,3
Efficiency, max.	%	90	80	70	60	55
Direction of rotation, drive to output		=	=	=	=	=
Reduction ratio (exact)		4:1	16:1	64:1	256:1	1 024:1
L2 [mm] = length without motor		9,6	12,3	15,0	17,7	20,4
L1 [mm] = length with motor	0816P...SR	25,5	28,2	30,9	33,6	36,3
	0824P...B	33,7	36,4	39,1	41,8	44,5
	AM0820...08	23,4	26,1	28,8	31,5	34,2

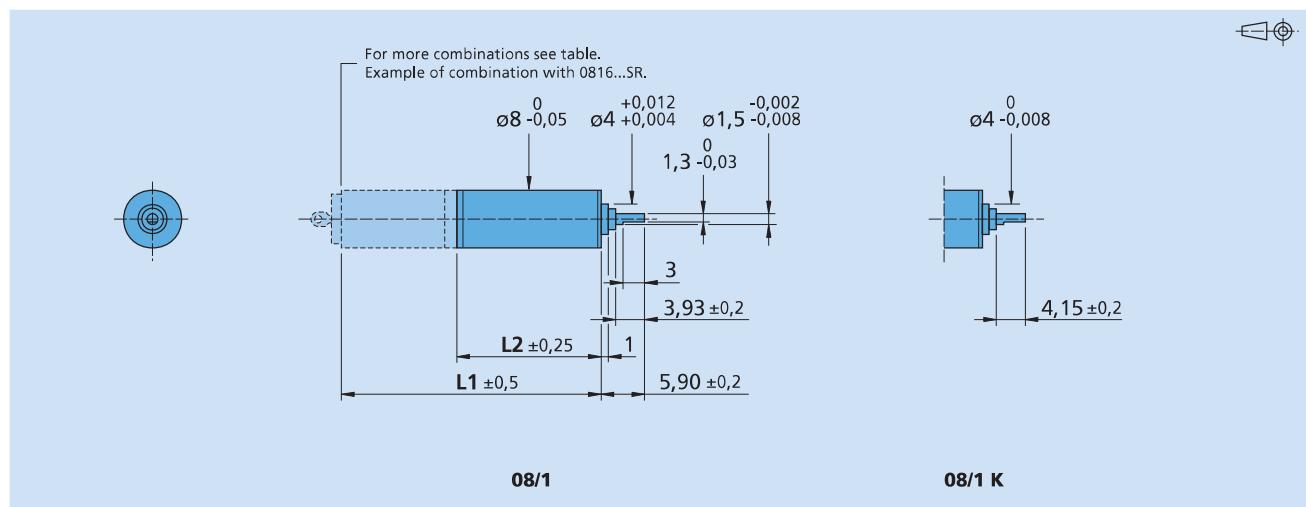

Spur Gearheads

15 mNm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors


Series 08/2

	08/2	08/2K
Housing material	metal	metal
Geartrain material	metal	metal
Recommended max. input speed for:		
- continuous operation	8 000 min ⁻¹	8 000 min ⁻¹
Backlash, at no-load	≤ 5 °	≤ 5 °
Bearings on output shaft	sintered bearings	ball bearings
Shaft load, max.:		
- radial (4,5 mm from mounting face)	≤ 0,8 N	≤ 5 N
- axial	≤ 1 N	≤ 3 N
Shaft press fit force, max.	≤ 5 N	≤ 5 N
Shaft play		
- radial (4,5 mm from mounting face)	≤ 0,06 mm	≤ 0,06 mm
- axial	≤ 0,1 mm	≤ 0,05 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	2	3	4	5	6	7	8	9
Continuous torque	mNm	15	15	15	15	15	15	15
Intermittent torque	mNm	25	25	25	25	25	25	25
Mass without motor, ca.	g	3,2	3,4	3,6	3,8	4	4,2	4,4
Efficiency, max.	%	94	90	86	81	77	74	70
Direction of rotation, drive to output		=	≠	=	≠	=	≠	=
Reduction ratio ¹⁾ (rounded)		4:1	9,4:1	21,9:1	51,2:1	120:1	279:1	650:1
L2 [mm] = length without motor		12,0	13,4	15,2	17,0	18,8	20,6	22,4
L1 [mm] = length with motor	0816D...SR	27,9	29,3	31,1	32,9	34,7	36,5	38,3
	0824D...B	36,1	37,5	39,3	41,1	42,9	44,7	46,5
	AM0820...12	25,8	27,2	29,0	30,8	32,6	34,4	36,2

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

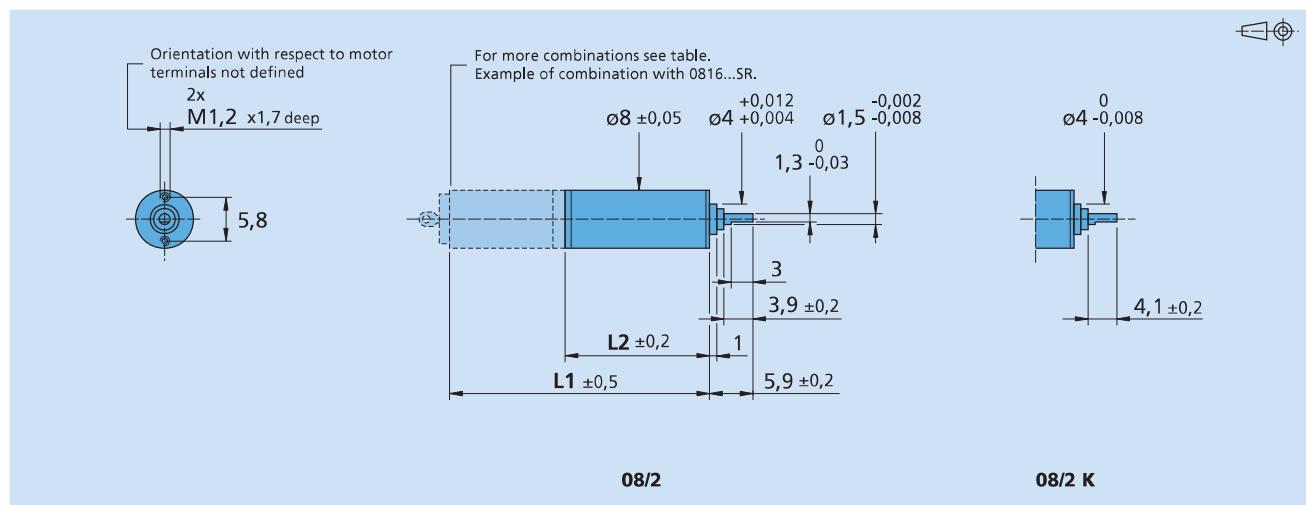

Spur Gearheads

Zero Backlash

15 mNm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 08/3


	08/3
Housing material	metal
Geartrain material	metal
Recommended max. input speed for:	
– continuous operation	8 000 min ⁻¹
Backlash, at no-load	0 °
Bearings on output shaft	ball bearings
Shaft load, max.:	
– radial (4,5 mm from mounting face)	≤ 5 N
– axial	≤ 3 N
Shaft press fit force, max.	≤ 5 N
Shaft play	
– radial (4,5 mm from mounting face)	≤ 0,06 mm
– axial	≤ 0,05 mm
Operating temperature range	- 30 ... + 100 °C

Technical data

Number of gear stages	6	7	8	9	
Continuous torque	mNm	15	15	15	
Intermittent torque	mNm	25	25	25	
Mass without motor, ca.	g	4,5	4,9	5,3	5,7
Efficiency, max.		-	-	-	
Direction of rotation, drive to output		=	≠	=	≠
Reduction ratio ¹⁾ (rounded)	120:1	279:1	650:1	1 518:1	
L2 [mm] = length without motor	18,8	20,6	22,4	24,2	
L1 [mm] = length with motor	0816D...SR	34,7	36,5	38,3	40,1
	0824D...B	42,9	44,7	46,5	48,3
	AM0820...12	32,6	34,4	36,2	38,0

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

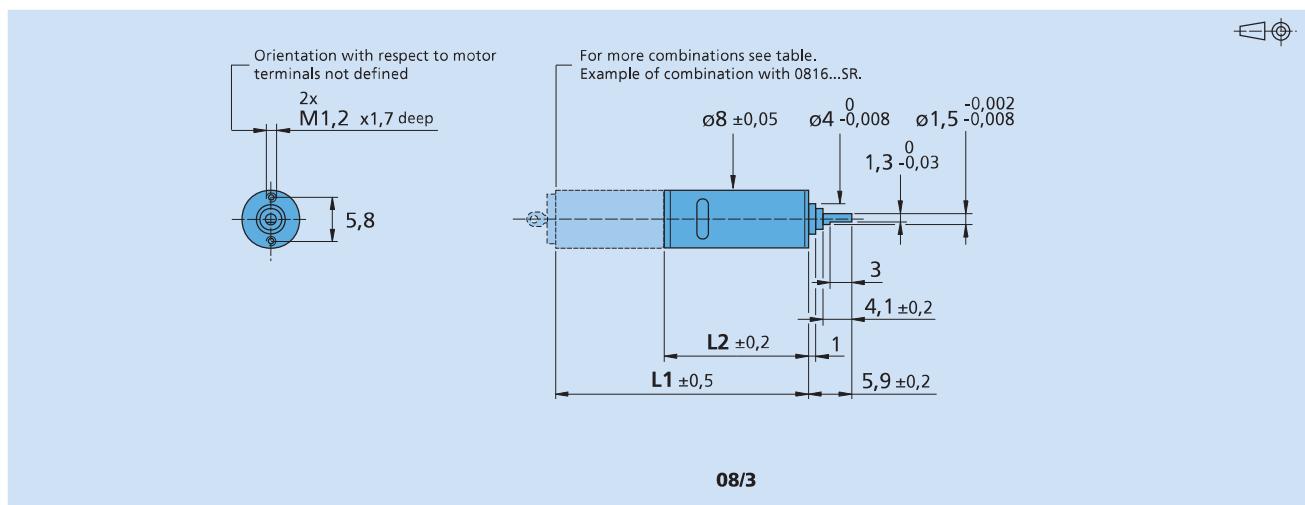

Planetary Gearheads

0,1 Nm


For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 10/1

	10/1	10/1K
Housing material	metal	metal
Geartrain material	steel	steel
Recommended max. input speed for:		
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings, preloaded
Shaft load, max.:		
- radial (5 mm from mounting face)	≤ 1 N	≤ 7 N
- axial	≤ 2 N	≤ 5 N
Shaft press fit force, max.	≤ 10 N	≤ 5 N
Shaft play		
- radial (5 mm from mounting face)	≤ 0,06 mm	≤ 0,04 mm
- axial	≤ 0,1 mm	= 0 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	6
Continuous torque	mNm	5	15	54	100	100
Intermittent torque	mNm	200	200	200	200	200
Mass without motor, ca.	g	6	7	8	10	11
Efficiency, max.	%	90	80	70	60	55
Direction of rotation, drive to output		=	=	=	=	=
Reduction ratio (exact)		4:1	16:1	64:1	256:1	1 024:1
						4 096:1
L2 [mm] = length without motor		9,7	12,8	15,9	19,0	22,1
L1 [mm] = length with motor	0816M...SR	25,6	28,7	31,8	34,9	38,0
	1016M...SR	25,6	28,7	31,8	34,9	38,0
	1024M...SR	33,6	36,7	39,8	42,9	46,0
	1219M...G	28,4	31,5	34,6	37,7	40,8
	1224M...SR	33,9	37,0	40,1	43,2	46,3
	0824M...B	33,8	36,9	40,0	43,1	46,2
	1028M...B	37,8	40,9	44,0	47,1	50,2
	1218M...B	27,7	30,8	33,9	37,0	40,1
	1226M...B	35,7	38,8	41,9	45,0	48,1
	AM0820...10	23,5	26,6	29,7	32,8	35,9
	AM1020...08	25,6	28,7	31,8	34,9	38,0
	DM1220...55	27,1	30,2	33,3	36,4	39,5

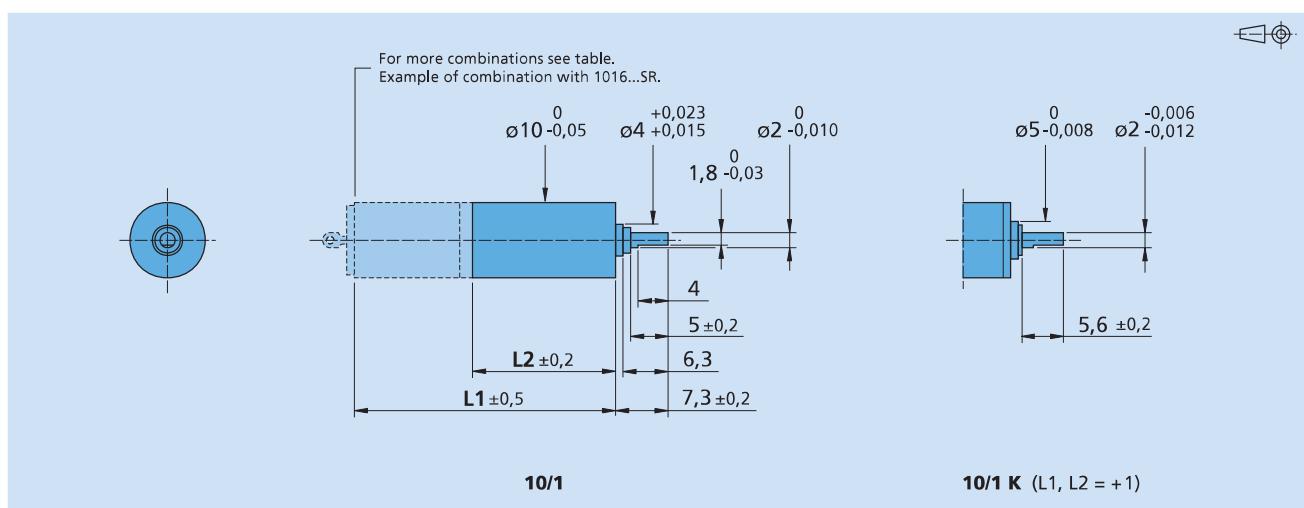

Spur Gearheads

0,03 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 12/3


	12/3	12/3K
Housing material	metal	metal
Geartrain material	metal	metal
Recommended max. input speed for:		
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings
Shaft load, max.:		
- radial (4,5 mm from mounting face)	≤ 3 N	≤ 5 N
- axial	≤ 2 N	≤ 10 N
Shaft press fit force, max.	≤ 10 N	≤ 10 N
Shaft play		
- radial (4,5 mm from mounting face)	≤ 0,06 mm	≤ 0,08 mm
- axial	≤ 0,1 mm	≤ 0,05 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	3	4	5	6	7	8	9	10	11	
Continuous torque	mNm	6	8	10	20	30	30	30	30	
Intermittent torque	mNm	100	100	100	100	100	100	100	100	
Mass without motor, ca.	g	9	10	11	12	13	14	15	16	
Efficiency, max.	%	90	86	81	77	74	70	66	63	
Direction of rotation, drive to output		≠	=	≠	=	≠	=	≠	=	
Reduction ratio ¹⁾ (rounded)		9,17:1	20,6:1	46,4:1	104,4:1	235:1	529:1	1 190:1	2 677:1	6 023:1
L2 [mm] = length without motor		15,4	17,5	19,6	21,7	23,8	25,9	28,0	30,1	32,2
L1 [mm] = length with motor		1016E...SR	31,3	33,4	35,5	37,6	39,7	41,8	43,9	46,0
		1024E...SR	39,3	41,4	43,5	45,6	47,7	49,8	51,9	54,0
		1219E...G	34,1	36,2	38,3	40,4	42,5	44,6	46,7	48,8
		1224E...SR	39,6	41,7	43,8	45,9	48,0	50,1	52,2	54,3
		1028E...B	43,5	45,6	47,7	49,8	51,9	54,0	56,1	58,2
		1218E...B	33,4	35,5	37,6	39,7	41,8	43,9	46,0	48,1
		1226E...B	41,4	43,5	45,6	47,7	49,8	51,9	54,0	56,1
		AM1020...10	31,3	33,4	35,5	37,6	39,7	41,8	43,9	46,0
		DM1220...57	32,8	34,9	37,0	39,1	41,2	43,3	45,4	47,5

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 13 552:1 to 154 368:1 are available on request.

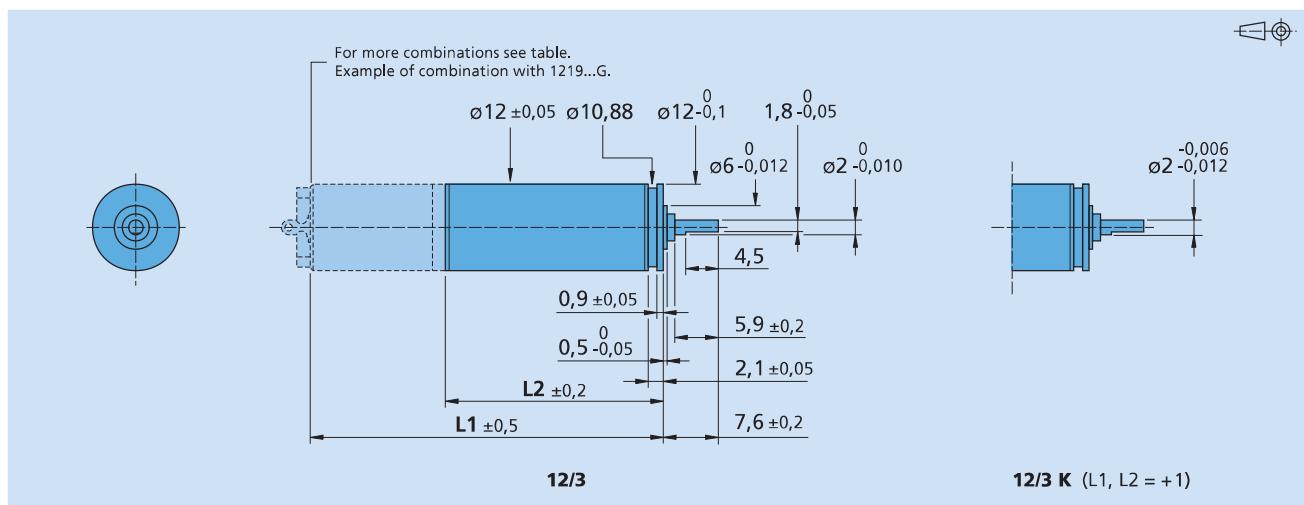

Planetary Gearheads

0,3 Nm


For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 12/4

	12/4	12/4K
Housing material	metal	metal
Geartrain material	metal	metal
Recommended max. input speed for:		
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings, preloaded
Shaft load, max.:		
- radial (6 mm from mounting face)	≤ 4 N	≤ 20 N
- axial	≤ 3 N	≤ 5 N
Shaft press fit force, max.	≤ 15 N	≤ 5 N
Shaft play		
- radial (6 mm from mounting face)	≤ 0,05 mm	≤ 0,04 mm
- axial	≤ 0,1 mm	= 0 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	
Continuous torque	mNm	300	300	300	300	
Intermittent torque	mNm	450	450	450	450	
Mass without motor, ca.	g	12	15	18	21	24
Efficiency, max.	%	90	80	70	60	55
Direction of rotation, drive to output		=	=	=	=	
Reduction ratio (exact)		4:1	16:1	64:1	256:1	1 024:1
L2 [mm] = length without motor		15,1	19,7	24,3	28,9	33,5
L1 [mm] = length with motor		1016A...SR	31,0	35,6	40,2	44,8
		1024A...SR	39,0	43,6	48,2	52,8
		1224A...SR	39,3	43,9	48,5	53,1
		1028A...B	43,2	47,8	52,4	57,0
		1218A...B	33,1	37,7	42,3	46,9
		1226A...B	41,1	45,7	50,3	54,9
		AM1020...31	31,0	35,6	40,2	44,8
		DM1220...59	32,5	37,1	41,7	46,3

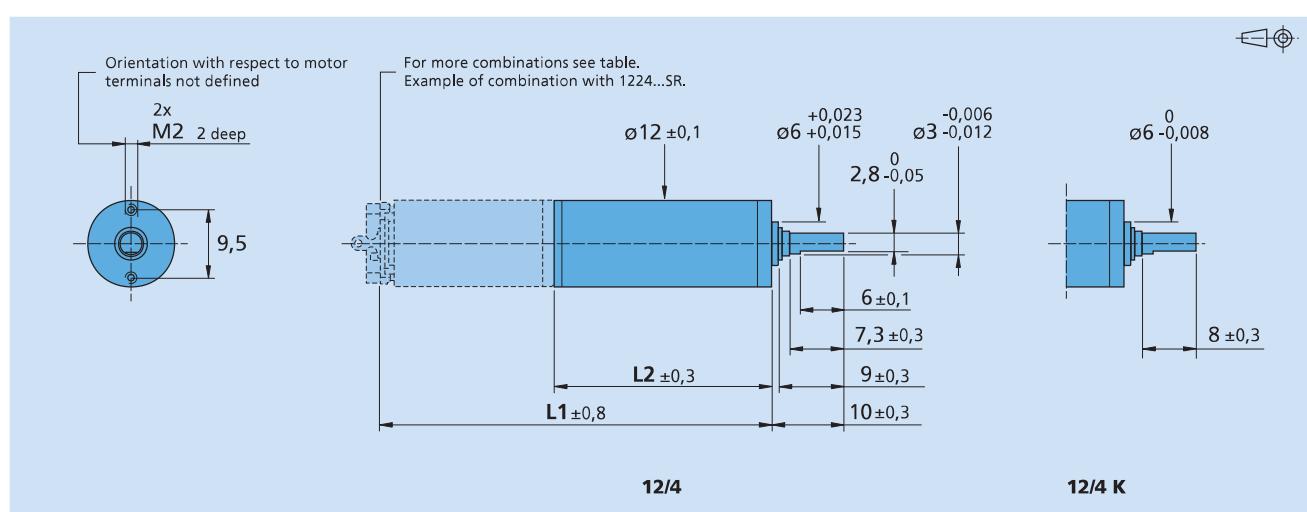

Spur Gearheads

Zero Backlash

0,03 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 12/5


	12/5
Housing material	metal
Geartrain material	metal
Recommended max. input speed for:	
- continuous operation	5 000 min ⁻¹
Backlash, at no-load	0 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
- radial (4,5 mm from mounting face)	≤ 5 N
- axial	≤ 5 N
Shaft press fit force, max.	≤ 10 N
Shaft play	
- radial (4,5 mm from mounting face)	≤ 0,04 mm
- axial	= 0 mm
Operating temperature range	- 30 ... + 100 °C

Technical data

	5	6	7	8	9
Continuous torque mNm	30	30	30	30	30
Intermittent torque mNm	100	100	100	100	100
Mass without motor, ca. g	11	12	13	14	15
Efficiency, max.	-	-	-	-	-
Direction of rotation, drive to output	≠	=	≠	=	≠
Reduction ratio ¹⁾ (rounded)	69,2:1	161:1	377:1	879:1	2 050:1
L2 [mm] = length without motor	18,7	20,8	22,9	25,0	27,1
L1 [mm] = length with motor	1016E...SR	34,6	36,7	38,8	40,9
	1024E...SR	42,6	44,7	46,8	48,9
	1224E...SR	42,9	45,0	47,1	49,2
	1028E...B	46,8	48,9	51,0	53,1
	1218E...B	36,7	38,8	40,9	43,0
	1226E...B	44,7	46,8	48,9	51,0
	AM1020...10	34,6	36,7	38,8	40,9
	DM1220...57	36,1	38,2	40,3	42,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

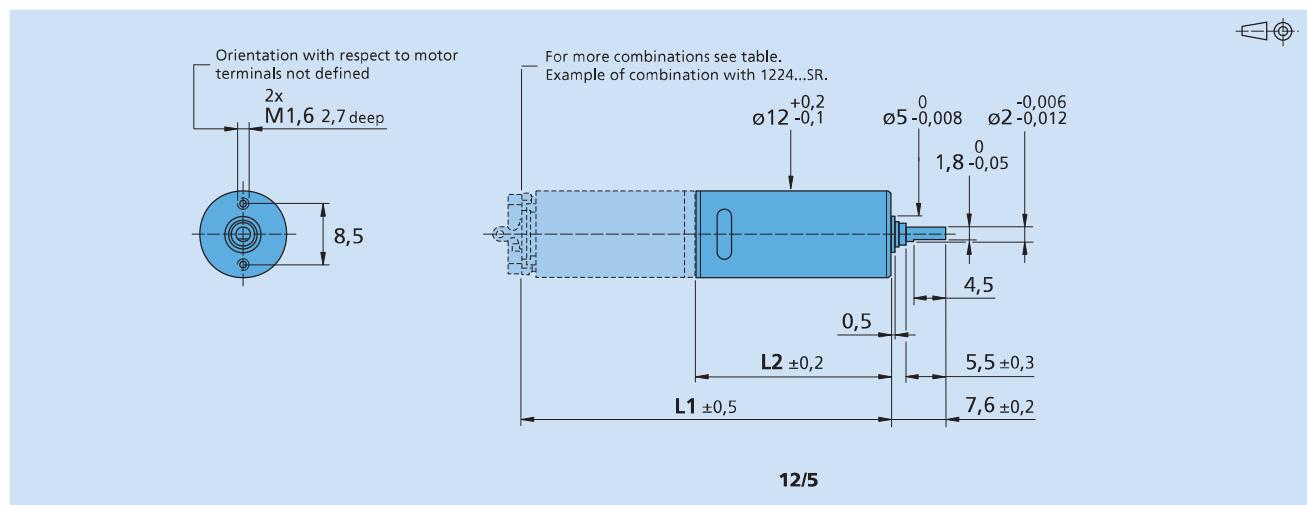

Planetary Gearheads

0,18 Nm

For combination with
DC-Micromotors

Series 13A

	13A	13AC	13AK
Housing material	plastic/aluminium	plastic/aluminium	plastic/aluminium
Geartrain material	plastic	plastic	plastic
Recommended max. input speed for:			
– continuous operation	5 000 min ⁻¹	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 4 °	≤ 4 °	≤ 4 °
Bearings on output shaft	sintered bearings	ceramic bearings	ball bearings
Shaft load, max.:			
– radial (5 mm from mounting face)	≤ 3 N	≤ 10 N	≤ 15 N
– axial	≤ 1 N	≤ 2 N	≤ 5 N
Shaft press fit force, max.	≤ 10 N	≤ 10 N	≤ 10 N
Shaft play			
– radial (5 mm from mounting face)	≤ 0,06 mm	≤ 0,08 mm	≤ 0,09 mm
– axial	≤ 0,25 mm	≤ 0,25 mm	≤ 0,25 mm
Operating temperature range	- 30 ... + 65 °C	- 20 ... + 85 °C	- 30 ... + 85 °C



Technical data

	2	3	4	5	
Continuous torque	mNm	100	100	150	180
Intermittent torque	mNm	150	150	180	220
Mass without motor, ca.	g	5	5	5	6
Efficiency, max.	%	80	72	64	55
Direction of rotation, drive to output		=	=	=	=
Reduction ratio ¹⁾ (rounded)		16:1	50:1 64:1	158:1 201:1 256:1	497:1 632:1 805:1 1 024:1
L2 [mm] = length without motor		18,8	22,0	25,2	28,4
L1 [mm] = length with motor	1319C...SR	38,0	41,2	44,4	47,6
	1331C...SR	50,0	53,2	56,4	59,6
	1336C...CXR	53,8	57,0	60,2	63,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

Vibrational load of up to 5 g at frequencies up to 500 Hz will not limit the function of the motor-gearhead combinations.

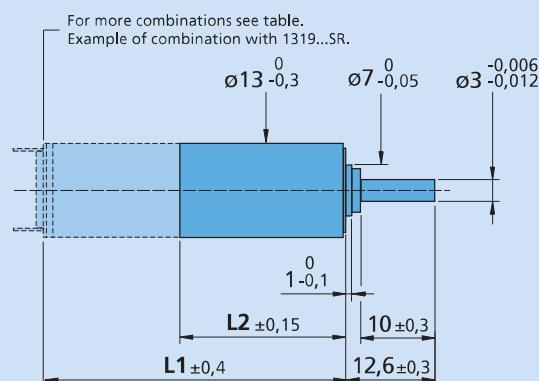

13A, 13AC, 13AK

Planetary Gearheads

0,3 Nm

For combination with
DC-Micromotors


Series 14/1

	14/1
Housing material	metal
Geartrain material	steel
Recommended max. input speed for:	
– continuous operation	5 000 min ⁻¹
Backlash, at no-load	≤ 1 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (6,5 mm from mounting face)	≤ 20 N
– axial	≤ 5 N
Shaft press fit force, max.	≤ 15 N
Shaft play	
– radial (6,5 mm from mounting face)	≤ 0,04 mm
– axial	= 0 mm
Operating temperature range	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	6	
Number of gear stages							
Continuous torque	mNm	200	300	300	300	300	
Intermittent torque	mNm	300	450	450	450	450	
Mass without motor, ca.	g	17	20	24	27	30	
Efficiency, max.	%	90	80	70	60	55	
Direction of rotation, drive to output		=	=	=	=	=	
Reduction ratio ¹⁾ (rounded)		3,71:1	9,7:1 14:1	43:1 66:1	94:1 112:1 134:1 159:1 190:1 246:1	415:1 592:1 989:1 1 526:1	2 608:1 4 365:1 5 647:1
L2 [mm] = length without motor		20,9	25,0	29,2	33,3	37,4	41,5
L1 [mm] = length with motor	1319T...SR	34,1	38,2	42,4	46,5	50,6	54,7
	1331T...SR	46,1	50,2	54,4	58,5	62,6	66,7
	1336U...CXR	50,9	55,0	59,2	63,3	67,4	71,5

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

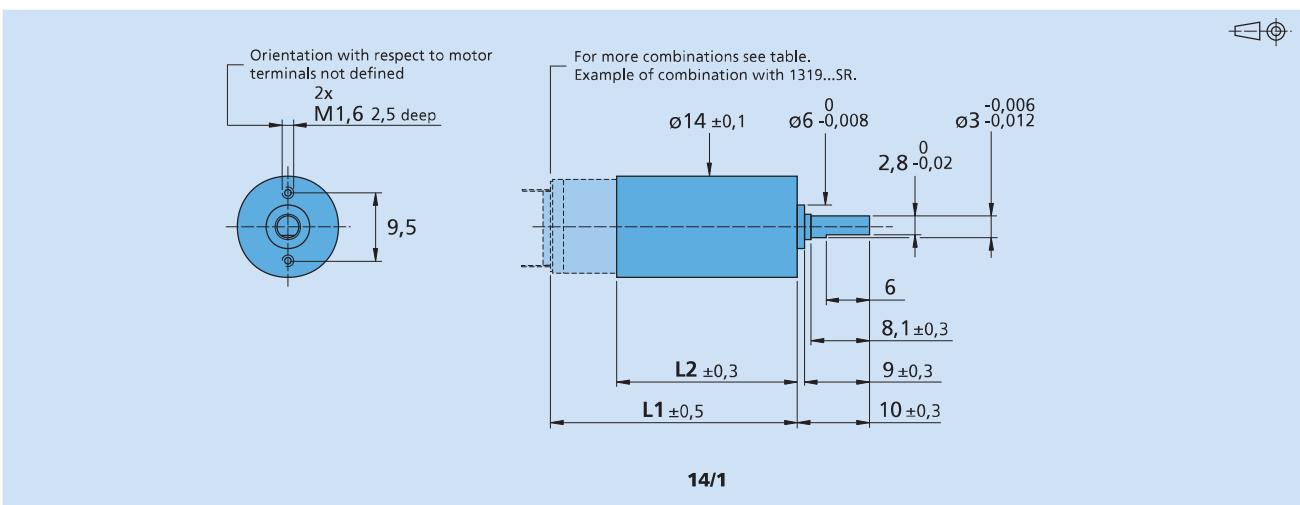

Planetary Gearheads

0,25 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 15A

	15A	15AC	15AK
Housing material	plastic	plastic	plastic
Geartrain material	plastic	plastic	plastic
Recommended max. input speed for:			
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 4 °	≤ 4 °	≤ 4 °
Bearings on output shaft	sintered bearings	ceramic bearings	ball bearings
Shaft load, max.:			
- radial (5 mm from mounting face)	≤ 3 N	≤ 10 N	≤ 15 N
- axial	≤ 1 N	≤ 2 N	≤ 5 N
Shaft press fit force, max.	≤ 10 N	≤ 10 N	≤ 10 N
Shaft play			
- radial (5 mm from mounting face)	≤ 0,06 mm	≤ 0,08 mm	≤ 0,09 mm
- axial	≤ 0,25 mm	≤ 0,25 mm	≤ 0,25 mm
Operating temperature range	- 30 ... + 65 °C	- 20 ... + 85 °C	- 30 ... + 85 °C

Technical data


	1	2	3	3	4	5	5	6
Number of gear stages								
Continuous torque	mNm	50	100	100	150	200	200	250
Intermittent torque	mNm	100	200	200	300	400	400	400
Mass without motor, ca.	g	4	5	5	5	6	6	7
Efficiency, max.	%	87	78	68	67	62	55	52
Direction of rotation, drive to output		=	=	=	=	=	=	=
Reduction ratio ¹⁾ (rounded)	Code B ²⁾		14:1 19:1	52:1 69:1		249:1	896:1	
	Code A ²⁾	5,33:1	28:1	102:1	152:1	369:1 546:1 809:1	1 327:1 1 966:1	2 913:1 4 315:1
								3 225:1 4 778:1 7 078:1 10 486:1 15 534:1 23 014:1
L2 [mm] = length without motor ³⁾	14,1	17,7	21,3	21,3	24,9	28,5	28,5	32,1
L1 [mm] = length with motor 1516A/B...SR	29,9	33,5	37,1	37,1	40,7	44,3	44,3	47,9
1524A/B...SR	37,9	41,5	45,1	45,1	48,7	52,3	52,3	55,9
1624A/B...S	37,9	41,5	45,1	45,1	48,7	52,3	52,3	55,9
1717A/B...SR	31,1	34,7	38,3	38,3	41,9	45,5	45,5	49,1
1724A/B...SR	38,1	41,7	45,3	45,3	48,9	52,5	52,5	56,1
AM1524...70	30,5	34,1	37,7	37,7	41,3	44,9	44,9	48,5

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ Example of ordering information: 1516 B 012 SR + 15A 19:1, not for AM1524.

³⁾ L2 + 0,7 mm, in combination with 1516A/B...SR and 1524A/B...SR.

Note: These gearheads are available only with motors mounted.

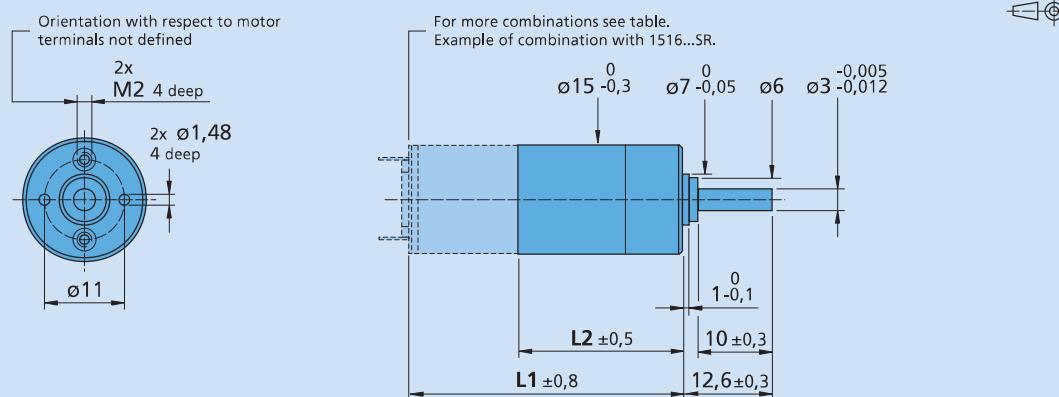

15A, 15AC, 15AK

Spur Gearheads

0,1 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 15/5


	15/5								
Housing material	metal								
Geartrain material ¹⁾	plastic/steel								
Recommended max. input speed for:	5 000 min ⁻¹								
– continuous operation	$\leq 3^\circ$								
Backlash, at no-load	ball bearings, preloaded								
Bearings on output shaft									
Shaft load, max.:									
– radial (6,5 mm from mounting face)	$\leq 25 \text{ N}$								
– axial	$\leq 5 \text{ N}$								
Shaft press fit force, max.	$\leq 5 \text{ N}$								
Shaft play									
– radial (6,5 mm from mounting face)	$\leq 0,03 \text{ mm}$								
– axial	$= 0 \text{ mm}$								
Operating temperature range	$-30 \dots +100 \text{ }^\circ\text{C}$								

Technical data									
Number of gear stages	2	3	4	4	5	5	6	6	7
Continuous torque	mNm	60	60	100	100	100	100	100	100
Intermittent torque	mNm	150	150	300	150	300	300	150	300
Mass without motor, ca.	g	17	19	21	21	22	22	24	25
Efficiency, max.	%	81	73	66	66	59	59	53	48
Direction of rotation, drive to output		=	\neq	=	=	\neq	\neq	=	\neq
Reduction ratio ²⁾ (rounded)		6,3:1 11,8:1	22:1 41:1	76:1	141:1	262:1	485:1	900:1	1 670:1 3 101:1
L2 [mm] = length without motor		26,2	29,9	32,0	32,0	34,1	34,1	36,2	36,2
L1 [mm] = length with motor	1319E...SR	32,5	36,2	38,3	38,3	40,4	40,4	42,5	42,5
	1331E...SR	44,5	48,2	50,3	50,3	52,4	52,4	54,5	54,5
	1516E...S	29,1	32,8	34,9	34,9	37,0	37,0	39,1	39,1
	1516E...SR	29,1	32,8	34,9	34,9	37,0	37,0	39,1	39,1
	1524E...SR	37,1	40,8	42,9	42,9	45,0	45,0	47,1	47,1
	AM1524...57	29,7	33,4	35,5	35,5	37,6	37,6	39,7	41,8

¹⁾ Gearheads with ratios < 3 101:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 5 752:1 to 235 067:1 are available on request.

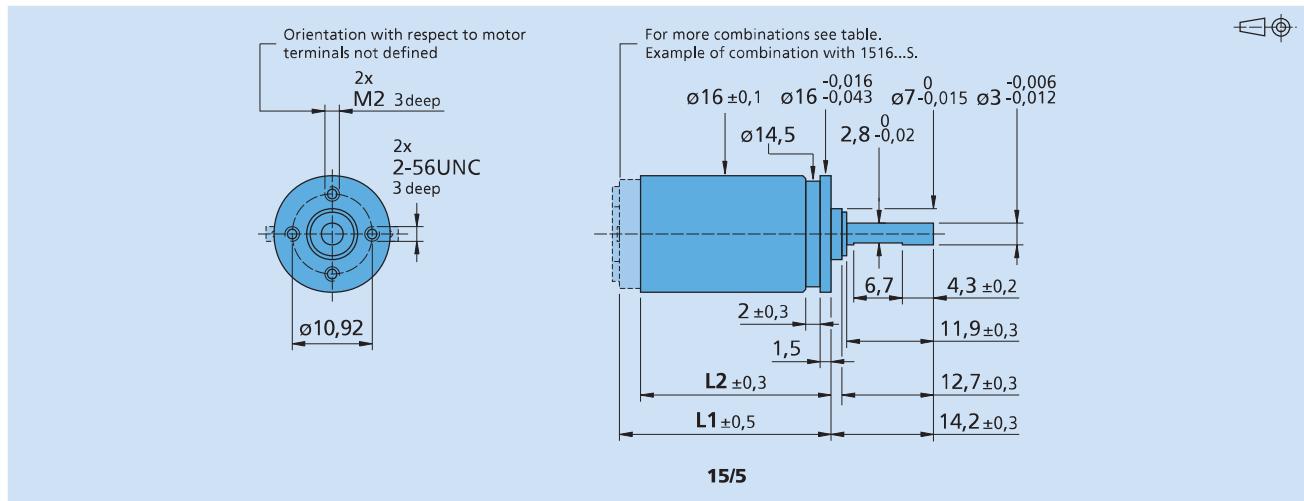

Spur Gearheads

0,1 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 15/5 S


	15/5 S									
Housing material	metal									
Geartrain material	steel									
Recommended max. input speed for:										
– continuous operation	5 000 min ⁻¹									
Backlash, at no-load	$\leq 3^\circ$									
Bearings on output shaft	ball bearings, preloaded									
Shaft load, max.:										
– radial (6,5 mm from mounting face)	$\leq 25 \text{ N}$									
– axial	$\leq 5 \text{ N}$									
Shaft press fit force, max.	$\leq 5 \text{ N}$									
Shaft play										
– radial (6,5 mm from mounting face)	$\leq 0,03 \text{ mm}$									
– axial	$= 0 \text{ mm}$									
Operating temperature range	$-30 \dots +100 \text{ }^\circ\text{C}$									

Technical data

	2	3	4	4	5	5	6	6	7
Continuous torque	mNm	60	60	100	100	100	100	100	100
Intermittent torque	mNm	150	150	300	150	300	150	300	300
Mass without motor, ca.	g	17	19	21	21	22	22	24	25
Efficiency, max.	%	81	73	66	66	59	59	53	48
Direction of rotation, drive to output		=	\neq	=	=	\neq	\neq	=	\neq
Reduction ratio ¹⁾ (rounded)		6,3:1 11,8:1	22:1 41:1	76:1	141:1	262:1	485:1	900:1	1 670:1 3 101:1
L2 [mm] = length without motor		26,2	29,9	32,0	32,0	34,1	34,1	36,2	36,2
L1 [mm] = length with motor	1319E...SR	32,5	36,2	38,3	38,3	40,4	40,4	42,5	42,5
	1331E...SR	44,5	48,2	50,3	50,3	52,4	52,4	54,5	54,5
	1516E...S	29,1	32,8	34,9	34,9	37,0	37,0	39,1	39,1
	1516E...SR	29,1	32,8	34,9	34,9	37,0	37,0	39,1	39,1
	1524E...SR	37,1	40,8	42,9	42,9	45,0	45,0	47,1	47,1
	AM1524...57	29,7	33,4	35,5	35,5	37,6	37,6	39,7	41,8

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 5 752:1 to 235 067:1 are available on request.
The gearheads as S-type have all steel gears and heavy duty lubricant for extended lifetime performance.

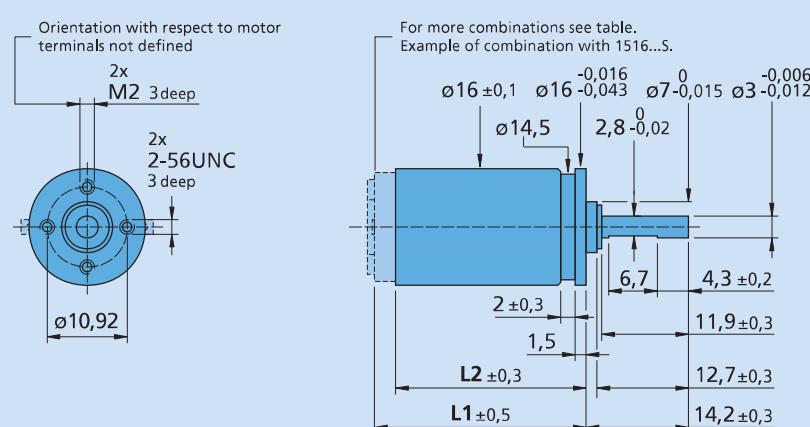

Spur Gearheads

Zero Backlash

0,1 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 15/8


	15/8
Housing material	metal
Geartrain material	steel
Recommended max. input speed for:	
- continuous operation	5 000 min ⁻¹
Backlash, at no-load	0 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
- radial (6,5 mm from mounting face)	≤ 25 N
- axial	≤ 5 N
Shaft press fit force, max.	≤ 5 N
Shaft play	
- radial (6,5 mm from mounting face)	≤ 0,03 mm
- axial	= 0 mm
Operating temperature range	- 30 ... + 100 °C

Technical data

	4	4	5	5	6	6
Continuous torque	mNm	100	100	100	100	100
Intermittent torque	mNm	300	150	300	150	300
Mass without motor, ca.	g	24	24	26	26	28
Efficiency, max.		-	-	-	-	-
Direction of rotation, drive to output		=	=	≠	≠	=
Reduction ratio ¹⁾ (rounded)		76:1	141:1	262:1	485:1	900:1
						1 670:1
L2 [mm] = length without motor		32,0	32,0	34,1	34,1	36,2
L1 [mm] = length with motor	1516E...SR	34,9	34,9	37,0	37,0	39,1
	1524E...SR	42,9	42,9	45,0	45,0	47,1
	AM1524...57	35,5	35,5	37,6	37,6	39,7

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

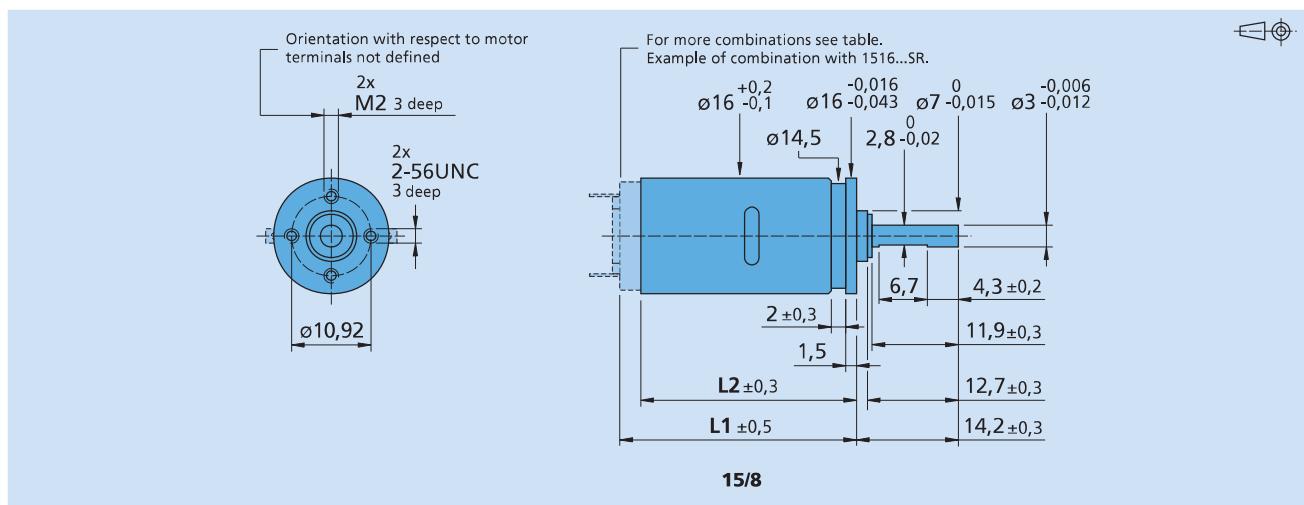

Planetary Gearheads

0,35 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors


Series 15/10

	15/10	15/10K
Housing material	stainless steel	stainless steel
Geartrain material	steel	steel
Recommended max. input speed for:		
- continuous operation	6 000 min ⁻¹	6 000 min ⁻¹
Backlash, at no-load	≤ 1,5 °	≤ 1,5 °
Bearings on output shaft	sintered bearings	ball bearings, preloaded
Shaft load, max.:		
- radial (6,5 mm from mounting face)	≤ 4 N	≤ 30 N
- axial	≤ 3 N	≤ 5 N
Shaft press fit force, max.	≤ 100 N	≤ 25 N
Shaft play		
- radial (6,5 mm from mounting face)	≤ 0,05 mm	≤ 0,03 mm
- axial	≤ 0,1 mm	= 0 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	1	2	3	4	5	
Continuous torque	mNm	350	350	350	350	
Intermittent torque	mNm	500	500	500	500	
Mass without motor, ca.	g	19	23	27	31	35
Efficiency, max.	%	90	80	70	60	50
Direction of rotation, drive to output		=	=	=	=	
Reduction ratio ¹⁾ (rounded)		3,33:1 4,5:1	11:1 15:1 20:1	37:1 44:1 50:1 68:1 81:1 91:1	123:1 148:1 167:1 178:1 200:1 240:1 270:1 304:1 365:1	412:1 494:1 593:1 667:1 750:1 800:1 900:1 1 013:1 1 367:1
L2 [mm] = length without motor		17,1	21,3	25,4	29,5	33,6
L1 [mm] = length with motor	1516T...SR	32,9	37,1	41,2	45,3	49,4
	1524T...SR	40,9	45,1	49,2	53,3	57,4
	1624T...S	40,9	45,1	49,2	53,3	57,4
	1717T...SR	34,1	38,3	42,4	46,5	50,6
	1724T...SR	41,1	45,3	49,4	53,5	57,6
	1727U...CXR	44,3	48,5	52,6	56,7	60,8
	1741U...CXR	58,3	62,5	66,6	70,7	74,8
	1628T...B	45,1	49,3	53,4	57,5	61,6
	1645U...BHS	62,5	66,7	70,8	74,9	79,0
	1660U...BHS/BHT	77,5	81,7	85,8	89,9	94,0
	AM1524...55	33,5	37,7	41,8	45,9	50,0

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

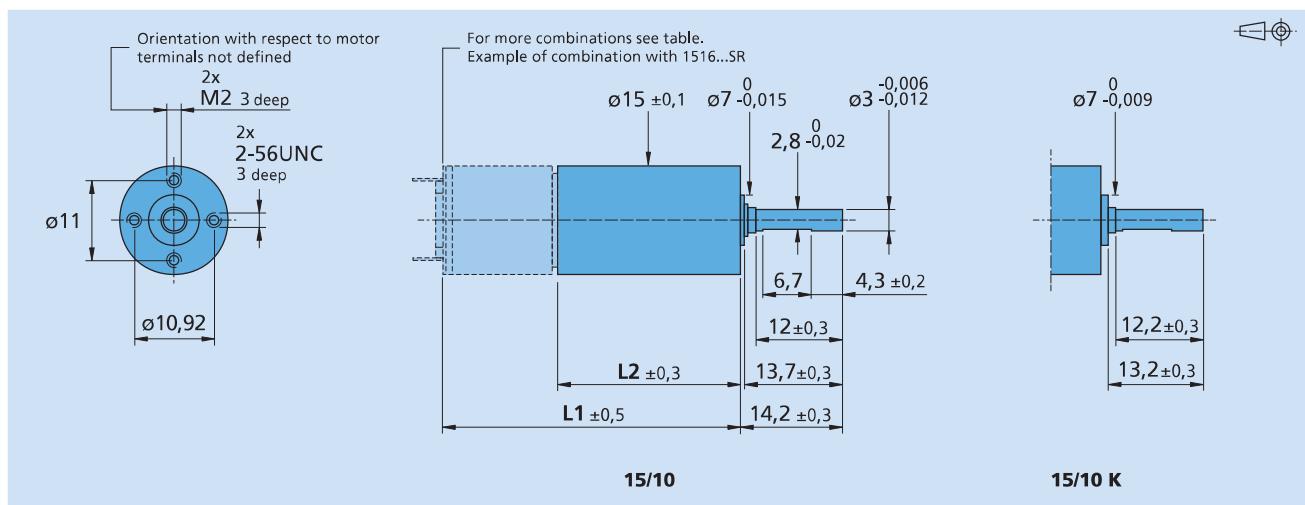

Spur Gearheads

0,03 Nm

For combination with
DC-Micromotors
Stepper Motors


Series 16A

	16A	16AC	16AK
Housing material	plastic	plastic	plastic
Geartrain material	metal	metal	metal
Recommended max. input speed for:			
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 4 °	≤ 4 °	≤ 4 °
Bearings on output shaft	sintered bearings	ceramic bearings	ball bearings
Shaft load, max.:			
- radial (5 mm from mounting face)	≤ 2 N	≤ 6 N	≤ 10 N
- axial	≤ 1 N	≤ 2 N	≤ 5 N
Shaft press fit force, max.	≤ 10 N	≤ 10 N	≤ 10 N
Shaft play			
- radial (5 mm from mounting face)	≤ 0,05 mm	≤ 0,06 mm	≤ 0,06 mm
- axial	≤ 0,25 mm	≤ 0,25 mm	≤ 0,25 mm
Operating temperature range	- 30 ... + 65 °C	- 20 ... + 65 °C	- 30 ... + 65 °C

Technical data

	2	3	3	4	4	5	6	7	
Number of gear stages									
Continuous torque	mNm	10	10	20	20	30	30	30	
Intermittent torque	mNm	100	100	100	100	100	100	100	
Mass without motor, ca.	g	3	4	4	4	5	5	6	
Efficiency, max.	%	81	73	73	66	66	59	53	48
Direction of rotation, drive to output		=	≠	≠	=	=	≠	=	≠
Reduction ratio ¹⁾ (rounded)		11,9:1	22:1	41:1	76:1	141:1	262:1 485:1	900:1 1 670:1	3 101:1 5 752:1
L2 [mm] = length without motor		9,2	11,0	11,0	12,8	12,8	14,5	16,3	18,0
L1 [mm] = length with motor	1516E...S	25,0	26,8	26,8	28,6	28,6	30,3	32,1	33,8
	1516E...SR	25,0	26,8	26,8	28,6	28,6	30,3	32,1	33,8
	1524E...SR	33,0	34,8	34,8	36,6	36,6	38,3	40,1	41,8
	1624E...S	33,0	34,8	34,8	36,6	36,6	38,3	40,1	41,8
	1717E...SR	26,2	28,0	28,0	29,8	29,8	31,5	33,3	35,0
	1724E...SR	33,0	34,8	34,8	36,6	36,6	38,3	40,1	41,8
	AM1524...57	25,6	27,4	27,4	29,2	29,2	30,9	32,7	34,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

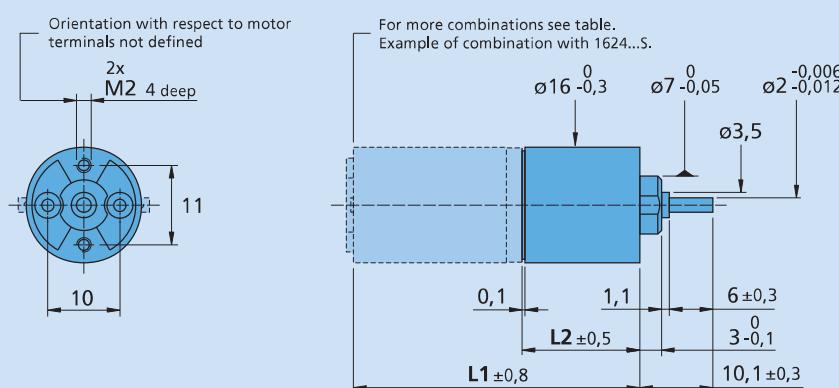

16A, 16AC, 16AK

Spur Gearheads

0,1 Nm

For combination with
DC-Micromotors

Series 16/5


	16/5								
Housing material	metal								
Geartrain material ¹⁾	plastic/steel								
Recommended max. input speed for:	5 000 min ⁻¹								
– continuous operation	$\leq 3^\circ$								
Backlash, at no-load	ball bearings, preloaded								
Bearings on output shaft									
Shaft load, max.:									
– radial (6,5 mm from mounting face)	$\leq 25 \text{ N}$								
– axial	$\leq 5 \text{ N}$								
Shaft press fit force, max.	$\leq 5 \text{ N}$								
Shaft play									
– radial (6,5 mm from mounting face)	$\leq 0,03 \text{ mm}$								
– axial	$= 0 \text{ mm}$								
Operating temperature range	$-30 \dots +100 \text{ }^\circ\text{C}$								

Technical data									
Number of gear stages	2	3	4	4	5	5	6	6	7
Continuous torque	mNm	60	60	100	100	100	100	100	100
Intermittent torque	mNm	150	150	300	150	300	300	150	300
Mass without motor, ca.	g	17	19	21	21	22	22	24	25
Efficiency, max.	%	81	73	66	66	59	59	53	48
Direction of rotation, drive to output		=	\neq	=	=	\neq	\neq	=	\neq
Reduction ratio ²⁾ (rounded)		6,3:1 11,8:1	22:1 41:1	76:1	141:1	262:1	485:1	900:1	1 670:1 3 101:1
L2 [mm] = length without motor L1 [mm] = length with motor 1624E...S		26,2 37,1	29,9 40,8	32,0 42,9	32,0 42,9	34,1 45,0	34,1 45,0	36,2 47,1	36,2 47,1 38,3 49,2

¹⁾ Gearheads with ratios < 3 101:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 5 752:1 to 235 067:1 are available on request.

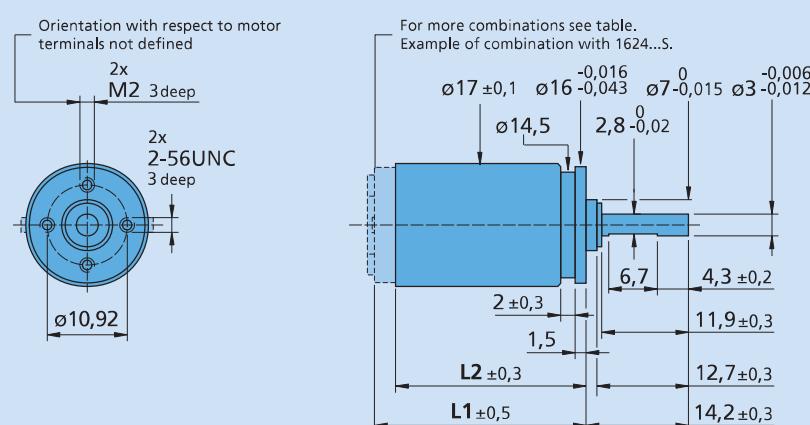

16/5

Spur Gearheads

0,1 Nm


For combination with
DC-Micromotors

Series 16/5 S

	16/5 S									
Housing material	metal									
Geartrain material	steel									
Recommended max. input speed for:										
– continuous operation	5 000 min ⁻¹									
Backlash, at no-load	$\leq 3^\circ$									
Bearings on output shaft	ball bearings, preloaded									
Shaft load, max.:										
– radial (6,5 mm from mounting face)	$\leq 25 \text{ N}$									
– axial	$\leq 5 \text{ N}$									
Shaft press fit force, max.	$\leq 5 \text{ N}$									
Shaft play										
– radial (6,5 mm from mounting face)	$\leq 0,03 \text{ mm}$									
– axial	$= 0 \text{ mm}$									
Operating temperature range	- 30 ... + 100 °C									
Technical data										
Number of gear stages	2	3	4	4	5	5	6	6	6	7
Continuous torque	mNm	60	60	100	100	100	100	100	100	100
Intermittent torque	mNm	150	150	300	150	300	150	300	150	300
Mass without motor, ca.	g	17	19	21	21	22	22	24	24	25
Efficiency, max.	%	81	73	66	66	59	59	53	53	48
Direction of rotation, drive to output	=	≠	=	=	≠	≠	=	=	=	≠
Reduction ratio ¹⁾ (rounded)	6,3:1 11,8:1	22:1 41:1	76:1	141:1	262:1	485:1	900:1	1 670:1	3 101:1	
L2 [mm] = length without motor L1 [mm] = length with motor 1624E...S	26,2 37,1	29,9 40,8	32,0 42,9	32,0 42,9	34,1 45,0	34,1 45,0	36,2 47,1	36,2 47,1	38,3 49,2	

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 5 752:1 to 235 067:1 are available on request.
The gearheads as S-type have all steel gears and heavy duty lubricant for extended lifetime performance.

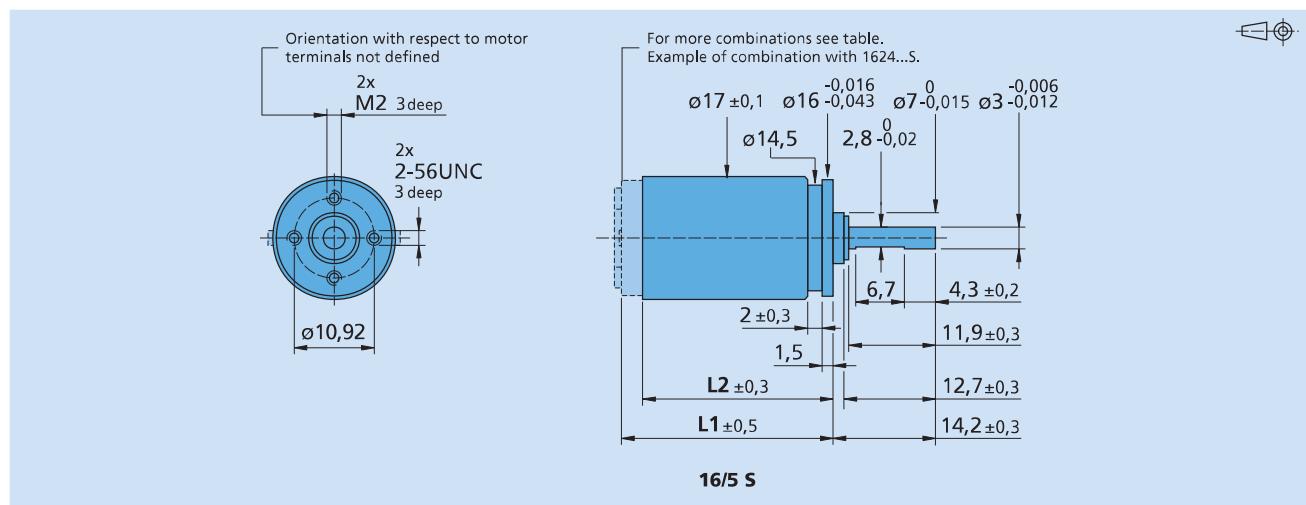

Planetary Gearheads


0,3 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 16/7

	16/7					
Housing material	metal					
Geartrain material	steel					
Recommended max. input speed for:						
– continuous operation	5 000 min ⁻¹					
Backlash, at no-load	$\leq 1^\circ$					
Bearings on output shaft	ball bearings, preloaded					
Shaft load, max.:						
– radial (6,5 mm from mounting face)	$\leq 30 \text{ N}$					
– axial	$\leq 5 \text{ N}$					
Shaft press fit force, max.	$\leq 25 \text{ N}$					
Shaft play						
– radial (6,5 mm from mounting face)	$\leq 0,03 \text{ mm}$					
– axial	$= 0 \text{ mm}$					
Operating temperature range	$-30 \dots +100 \text{ }^\circ\text{C}$					
Technical data						
Number of gear stages	1	2	3	4	5	6
Continuous torque	200	300	300	300	300	300
Intermittent torque	300	450	450	450	450	450
Mass without motor, ca.	18	23	28	33	38	43
Efficiency, max.	90	80	70	60	55	50
Direction of rotation, drive to output	=	=	=	=	=	=
Reduction ratio ¹⁾ (rounded)	3,71:1	9,7:1 14:1	43:1 66:1	94:1 112:1 134:1 159:1 190:1 246:1	415:1 592:1 989:1 1 526:1	2 608:1 4 365:1 5 647:1
L2 [mm] = length without motor	17,0	21,2	25,3	29,4	33,5	37,6
L1 [mm] = length with motor	1516T...SR	32,8	37,0	41,1	45,2	49,3
	1524T...SR	40,8	45,0	49,1	53,2	57,3
	1624T...S	40,8	45,0	49,1	53,2	57,3
	1717T...SR	34,0	38,2	42,3	46,4	50,5
	1724T...SR	41,0	45,2	49,3	53,4	57,5
	1727U...CXR	44,2	48,4	52,5	56,6	60,7
	1741U...CXR	58,2	62,4	66,5	70,6	74,7
	1628T...B	45,0	49,2	53,3	57,4	61,5
	AM1524...55	33,4	37,6	41,7	45,8	49,9

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

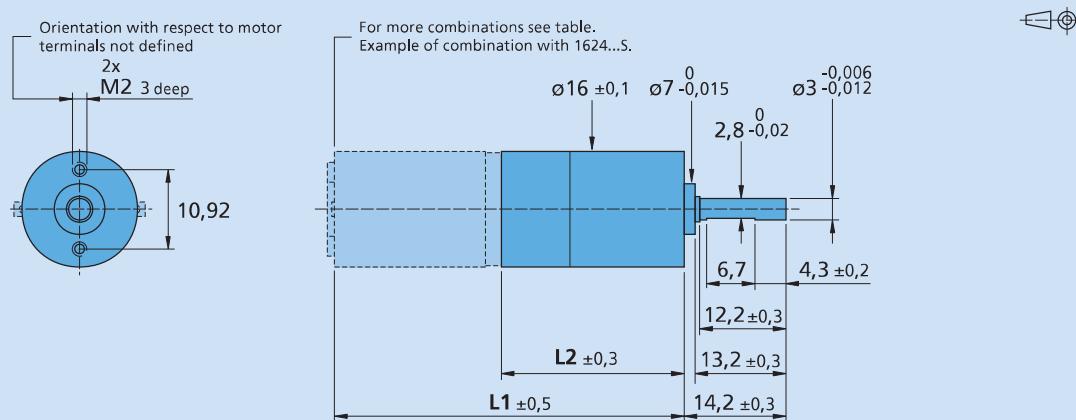

16/7

Spur Gearheads

Zero Backlash

0,1 Nm

For combination with
DC-Micromotors

Series 16/8


	16/8					
Housing material	metal					
Geartrain material	steel					
Recommended max. input speed for:						
– continuous operation	5 000 min ⁻¹					
Backlash, at no-load	0 °					
Bearings on output shaft	ball bearings, preloaded					
Shaft load, max.:						
– radial (6,5 mm from mounting face)	≤ 25 N					
– axial	≤ 5 N					
Shaft press fit force, max.	≤ 5 N					
Shaft play						
– radial (6,5 mm from mounting face)	≤ 0,03 mm					
– axial	= 0 mm					
Operating temperature range	- 30 ... + 100 °C					

Technical data

Number of gear stages	4	4	5	5	6	6
Continuous torque	mNm	100	100	100	100	100
Intermittent torque	mNm	300	150	300	150	300
Mass without motor, ca.	g	24	24	26	26	28
Efficiency, max.		-	-	-	-	-
Direction of rotation, drive to output		=	=	≠	≠	=
Reduction ratio ¹⁾ (rounded)		76:1	141:1	262:1	485:1	900:1
L2 [mm] = length without motor		32,0	32,0	34,1	34,1	36,2
L1 [mm] = length with motor 1624E...S		42,9	42,9	45,0	45,0	47,1

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

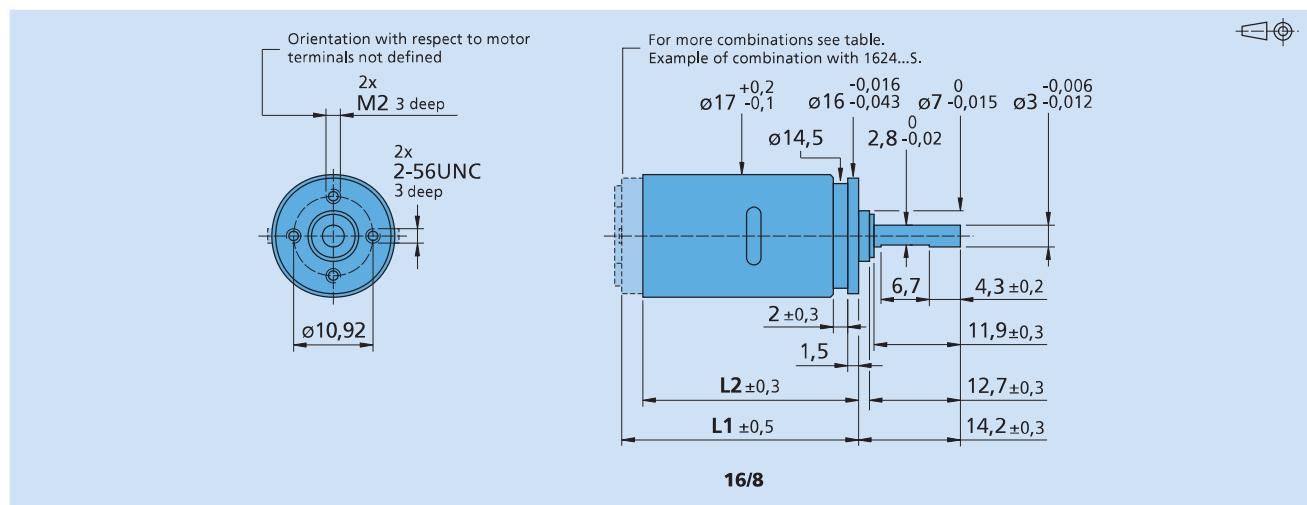

Planetary Gearheads


0,55 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 17/1

	17/1	17/1 K			
Housing material	stainless steel				
Geartrain material	steel				
Recommended max. input speed for:					
– continuous operation	8 000 min ⁻¹				
Backlash, at no-load	≤ 2 °				
Bearings on output shaft	sintered bearings				
Shaft load, max.:					
– radial (6,5 mm from mounting face)	≤ 5 N				
– axial	≤ 3 N				
Shaft press fit force, max.	≤ 100 N				
Shaft play					
– radial (6,5 mm from mounting face)	≤ 0,06 mm				
– axial	≤ 0,1 mm				
Operating temperature range	- 30 ... + 100 °C				
Technical data					
Number of gear stages	1	2	3	4	5
Continuous torque	mNm	550	550	550	550
Intermittent torque	mNm	800	800	800	800
Mass without motor, ca.	g	28	35	42	49
Efficiency, max.	%	90	80	70	60
Direction of rotation, drive to output	=	=	=	=	=
Reduction ratio ¹⁾ (rounded)	3,33:1 4,5:1	11:1 15:1 20:1	37:1 44:1 50:1 68:1 81:1 91:1	123:1 148:1 167:1 178:1 200:1 240:1 270:1 304:1 365:1	412:1 494:1 593:1 667:1 750:1 800:1 900:1 1 013:1 1 367:1
L2 [mm] = length without motor	18,6	23,7	28,8	33,9	39,1
L1 [mm] = length with motor	1624T...S	42,4	47,5	52,6	57,7
	1717T...SR	35,6	40,7	45,8	50,9
	1724T...SR	42,6	47,7	52,8	57,9
	1727U...CXR	45,8	50,9	56,0	61,1
	1741U...CXR	59,8	64,9	70,0	75,1
	1628T...B	46,6	51,7	56,8	61,9
	1645U...BHS	64,0	69,1	74,2	79,3
	1660U...BHS/BHT	79,0	84,1	89,2	94,3
	AM1524...55	35,0	40,1	45,2	50,3

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

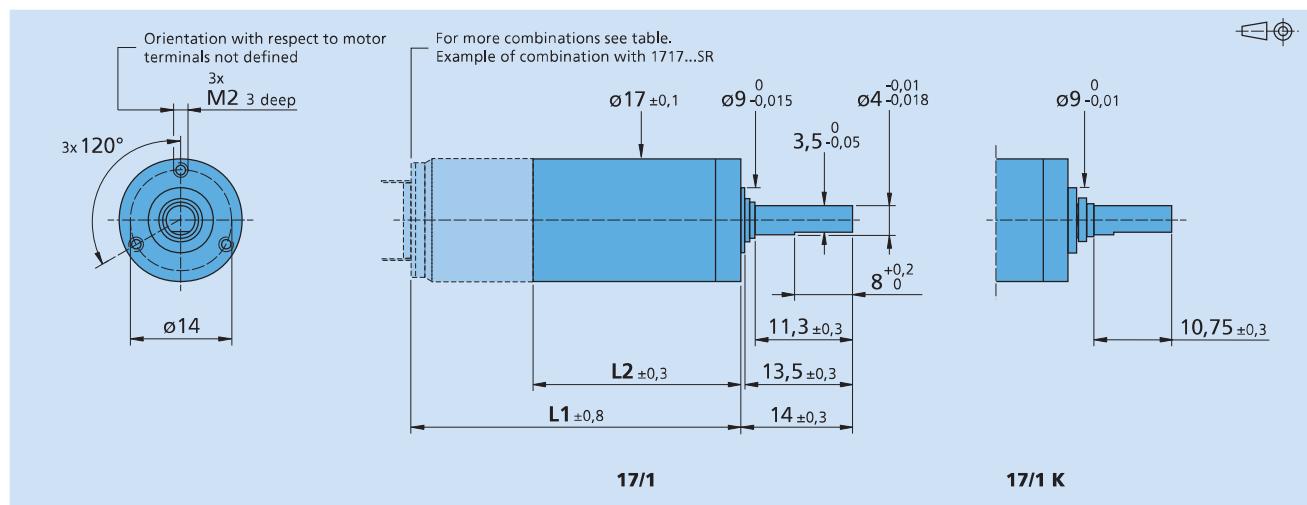

17/1

17/1 K

Planetary Gearheads

0,8 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 20/1R


	20/1R						
Housing material	steel	metal					
Geartrain material							
Recommended max. input speed for:							
- continuous operation	12 000 min ⁻¹						
Backlash, at no-load	≤ 1 °						
Bearings on output shaft	ball bearings, preloaded						
Shaft load, max.:							
- radial (8,5 mm from mounting face)	≤ 75 N						
- axial	≤ 20 N						
Shaft press fit force, max.	≤ 35 N						
Shaft play							
- radial (8,5 mm from mounting face)	≤ 0,03 mm						
- axial	= 0 mm						
Operating temperature range ¹⁾	- 10 ... + 125 °C						

Technical data	1	2	2	3	3	4	5
Number of gear stages							
Continuous torque	mNm	800	800	800	800	800	800
Intermittent torque	mNm	1 100	1 100	1 100	1 100	1 100	1 100
Mass without motor, ca.	g	29	39	39	49	49	69
Efficiency, max.	%	88	80	80	70	70	55
Direction of rotation, drive to output	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)	3,71:1	9,7:1 14:1	23:1	43:1 66:1	86:1	112:1 134:1 159:1 190:1 246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ³⁾	18,4	23,5	23,5	28,6	28,6	33,7	38,8
L1 [mm] = length with motor							
1741U...CXR	59,6	64,7	64,7	69,8	69,8	74,9	80,0
2224U...SR	42,6	47,7	47,7	52,8	52,8	57,9	63,0
2232U...SR	50,6	55,7	55,7	60,8	60,8	65,9	71,0
1645U...BHS	63,8	68,9	68,9	74,0	74,0	79,1	84,2
1660U...BHS/BHT	78,8	83,9	83,9	89,0	89,0	94,1	99,2
2036U...B	54,4	59,5	59,5	64,6	64,6	69,7	74,8
2057S...B	77,3	82,4	87,9	87,5	93,0	92,6	97,7
2214S...BXTH	37,3	42,4	47,9	47,5	53,0	52,6	57,7
2214S...BXTR	36,5	41,6	47,1	46,7	52,2	51,8	56,9
AM2224...10	46,1	51,2	51,2	56,3	56,3	61,4	66,5

¹⁾ Low operating temperature range - 45 ... + 100 °C shall be ordered as option - K2823

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

³⁾ L2 + 1,9 mm or 7,4 mm, in combination with 2057S...B and 2214...BXT R/H.

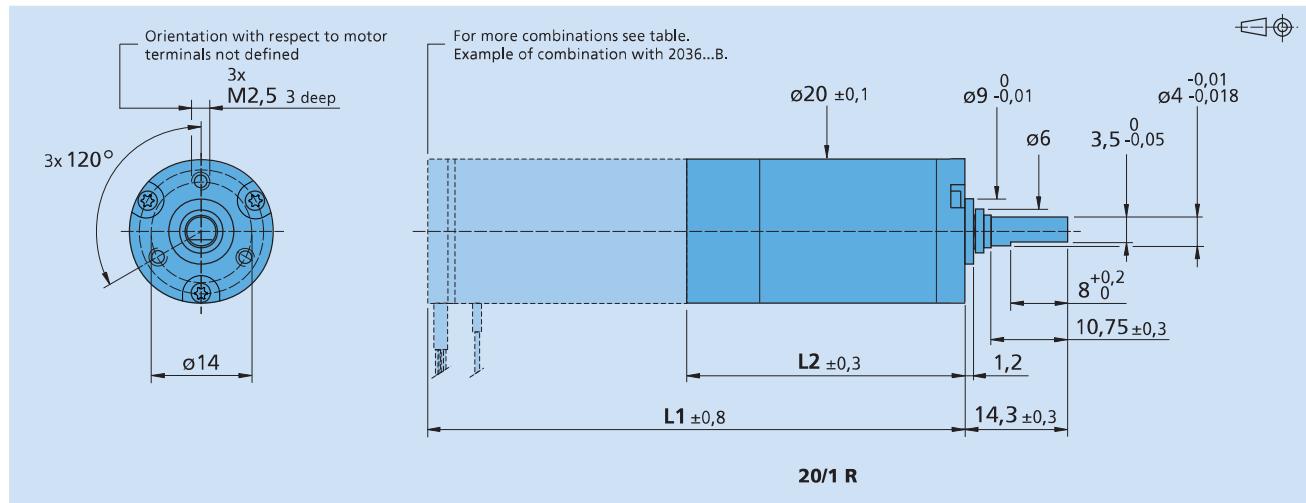

Planetary Gearheads

0,6 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 22E

	22E	22EC	22EK
Housing material	plastic	plastic	plastic
Geartrain material	plastic	plastic	plastic
Recommended max. input speed for:			
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ceramic bearings	ball bearings
Shaft load, max.:			
- radial (5 mm from mounting face)	≤ 3 N	≤ 15 N	≤ 50 N
- axial	≤ 3 N	≤ 2 N	≤ 5 N
Shaft press fit force, max.	≤ 15 N	≤ 15 N	≤ 15 N
Shaft play			
- radial (5 mm from mounting face)	≤ 0,05 mm	≤ 0,06 mm	≤ 0,07 mm
- axial	≤ 0,25 mm	≤ 0,25 mm	≤ 0,25 mm
Operating temperature range	- 30 ... + 65 °C	- 20 ... + 85 °C	- 30 ... + 85 °C

Technical data


	2	3	3	4	4	4	5	6
Continuous torque	mNm	200	300	400	400	500	600	600
Intermittent torque	mNm	400	600	800	800	1 000	1 000	1 000
Mass without motor, ca.	g	17	19	19	20	20	22	24
Efficiency, max.	%	78	69	67	62	61	60	55
Direction of rotation, drive to output		=	=	=	=	=	=	=
Reduction ratio ¹⁾ (rounded)	Code B ²⁾	19:1	69:1		249:1		896:1	3 225:1
	Code A ²⁾	28:1	102:1	152:1		369:1	546:1 809:1	1 327:1 1 966:1 2 913:1 4 315:1
							4 778:1 7 078:1	10 486:1 15 534:1 23 014:1
L2 [mm] = length without motor ³⁾		27,1	32,1	32,1	37,1	37,1	37,1	42,1
L1 [mm] = length with motor 2224A/B...SR		51,3	56,3	56,3	61,3	61,3	61,3	66,3
2230A/B...S		57,1	62,1	62,1	67,1	67,1	67,1	72,1
2232A/B...SR		59,3	64,3	64,3	69,3	69,3	69,3	74,3
2233A/B...S		59,7	64,7	64,7	69,7	69,7	69,7	74,7
2237A/B...CXR		64,1	69,1	69,1	74,1	74,1	74,1	79,7
AM2224...12		54,8	59,8	59,8	64,8	64,8	64,8	69,8
								74,8

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ Example of ordering information: 2224 B 012 SR + 22E 19:1, not for AM2224.

³⁾ L2 + 0,7 mm, in combination with 2224A/B...SR and 2232A/B...SR.

Note: These gearheads are available only with motors mounted.

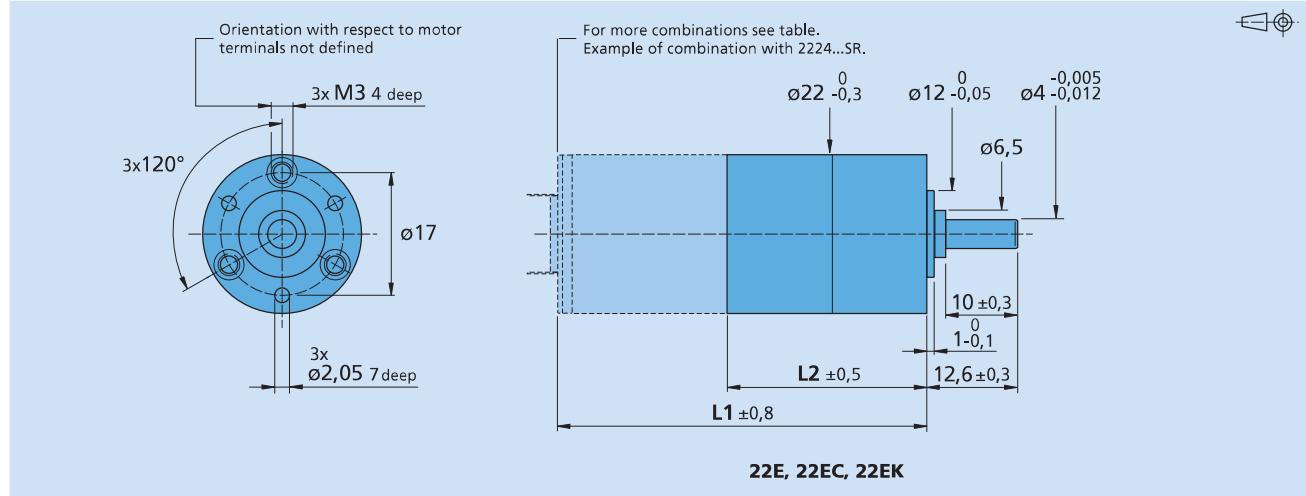

Planetary Gearheads

1,2 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 22EKV

		22EKV							
Housing material		plastic							
Geartrain material		plastic/steel/ceramic							
Recommended max. input speed for:		5 000 min ⁻¹							
– continuous operation		$\leq 3^\circ$							
Backlash, at no-load		ball bearings							
Bearings on output shaft									
Shaft load, max.:									
– radial (5 mm from mounting face)		$\leq 50 \text{ N}$							
– axial		$\leq 5 \text{ N}$							
Shaft press fit force, max.		$\leq 15 \text{ N}$							
Shaft play									
– radial (5 mm from mounting face)		$\leq 0,07 \text{ mm}$							
– axial		$\leq 0,25 \text{ mm}$							
Operating temperature range		- 30 ... + 85 °C							


Technical data									
Number of gear stages		2	3	3	4	4	4	5	6
Continuous torque	Nm	0,4	0,6	0,8	0,8	1	1,2	1,2	1,2
Intermittent torque	Nm	0,8	1,2	1,6	1,6	2	2	2	2
Mass without motor, ca.	g	27	29	29	30	30	30	32	34
Efficiency, max.	%	77	68	68	61	61	61	53	47
Direction of rotation, drive to output		=	=	=	=	=	=	=	=
Reduction ratio ¹⁾ (rounded)	Code B ²⁾	19:1	69:1		249:1			896:1	3 225:1
	Code A ²⁾	28:1	102:1	152:1		369:1	546:1 809:1	1 327:1 1 966:1 2 913:1 4 315:1	4 778:1 7 078:1 10 486:1 15 534:1 23 014:1
L2 [mm] = length without motor ³⁾		27,1	32,1	32,1	37,1	37,1	37,1	42,1	47,1
L1 [mm] = length with motor	2224A/B...SR	51,3	56,3	56,3	61,3	61,3	61,3	66,3	71,3
2230A/B...S		57,1	62,1	62,1	67,1	67,1	67,1	72,1	77,1
2232A/B...SR		59,3	64,3	64,3	69,3	69,3	69,3	74,3	79,3
2233A/B...S		59,7	64,7	64,7	69,7	69,7	69,7	74,7	79,7
2237A/B...CXR		64,1	69,1	69,1	74,1	74,1	74,1	79,1	84,1
AM2224...12		54,8	59,8	59,8	64,8	64,8	64,8	69,8	74,8

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ Example of ordering information: 2224 B 012SR + 22EKV 19:1, not for AM2224.

³⁾ L2 + 0,7 mm, in combination with 2224A/B...SR and 2232A/B...SR.

Note: These gearheads are available only with motors mounted.

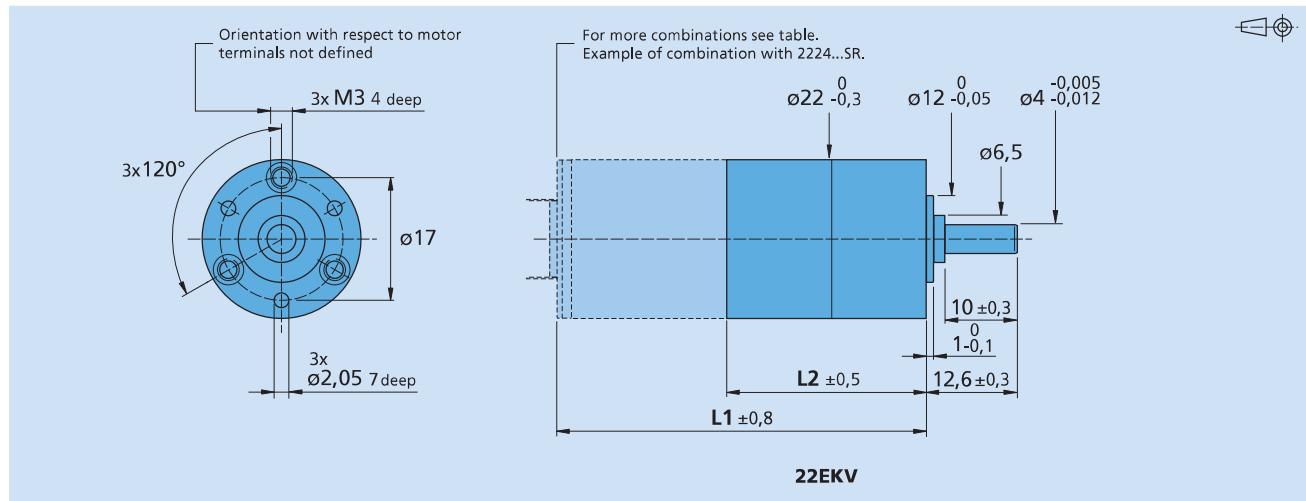

Planetary Gearheads

1 Nm

Series 22F

	22F
Housing material	steel
Geartrain material	metal
Recommended max. input speed for:	
– continuous operation	6 000 min ⁻¹
Backlash, at no-load	≤ 3,5 °
Bearings on output shaft	ball bearings
Shaft load, max.:	
– radial (10 mm from mounting face)	≤ 70 N
– axial	≤ 100 N
Shaft press fit force, max.	≤ 100 N
Shaft play	
– radial (10 mm from mounting face)	≤ 0,06 mm
– axial	≤ 0,2 mm
Operating temperature range	- 30 ... + 100 °C


Technical data

Number of gear stages	1	2	3	4	
Continuous torque	mNm	400	600	900	1 000
Intermittent torque	mNm	600	900	1 350	1 500
Mass without motor, ca.	g	41	57	75	90
Efficiency, max.	%	80	75	70	60
Direction of rotation, drive to output	=	=	=	=	

Reduction ratio ¹⁾ (rounded)	4:1	14:1	51:1	189:1	
		16:1	59:1	218:1	
		19:1	68:1	252:1	
		25:1	71:1	264:1	
			93:1	292:1	
			100:1	305:1	
			107:1	344:1	
			130:1		
			169:1		

L2 [mm] = length without motor	26,6	34,8	42,9	51,1	
L1 [mm] = length with motor	2224U...SR	50,8	59,0	67,1	75,3
	2232U...SR	58,8	67,0	75,1	83,3
	2237S...CXR	63,6	71,8	79,9	88,1
	2342S...CR	68,6	76,8	84,9	93,1
	2214S...BXTH	41,4	49,6	57,7	65,9
	2214S...BXTR	40,6	48,8	56,9	65,1
	2232S...BX4	60,4	68,6	76,7	84,9
	2250S...BX4(S)	78,4	86,6	94,7	102,9

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

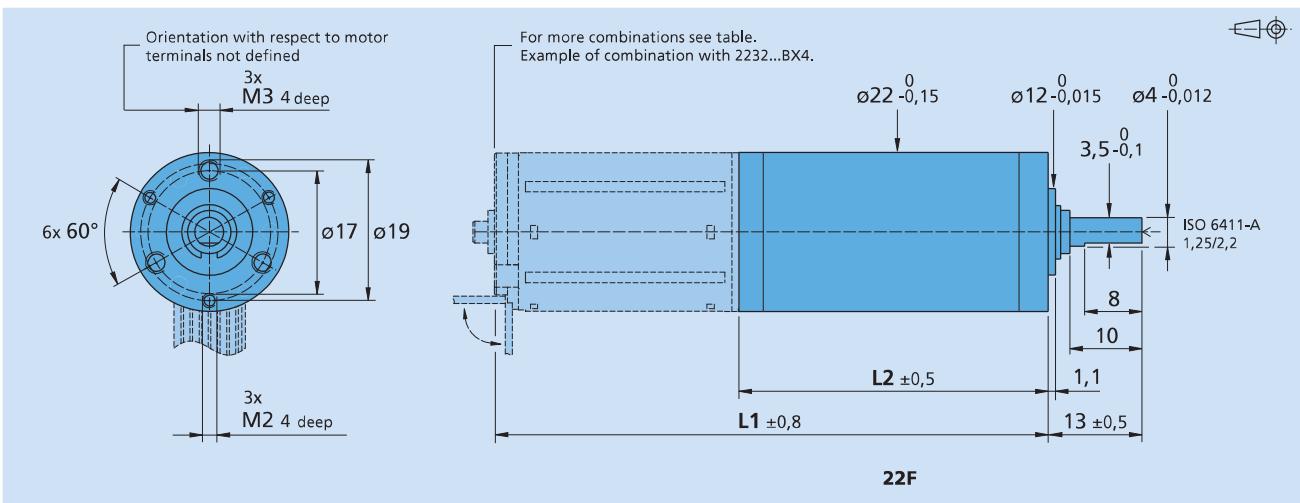

Spur Gearheads

0,1 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 22/2


	22/2	22/2K
Housing material	metal	metal
Geartrain material	metal	metal
Recommended max. input speed for:		
- continuous operation	4 000 min ⁻¹	4 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings, preloaded
Shaft load, max.:		
- radial (6 mm from mounting face)	≤ 3 N	≤ 100 N
- axial	≤ 5 N	≤ 5 N
Shaft press fit force, max.	≤ 50 N	≤ 5 N
Shaft play		
- radial (6 mm from mounting face)	≤ 0,05 mm	≤ 0,03 mm
- axial	≤ 0,2 mm	= 0 mm
Operating temperature range	- 30 ... + 100 °C	- 30 ... + 100 °C

Technical data

	2	3	4	5	6	7	8	9	10
Continuous torque	mNm	100	100	100	100	100	100	100	100
Intermittent torque	mNm	400	400	400	400	400	400	400	400
Mass without motor, ca.	g	58	68	72	77	82	88	93	98
Efficiency, max.	%	90	86	81	73	66	59	53	48
Direction of rotation, drive to output		=	≠	=	≠	=	≠	=	=
Reduction ratio ¹⁾ (rounded)		3,1:1 5,4:1	9,7:1 30,7:1	17,2:1 97,3:1	54,6:1 308:1	173:1 975:1	548:1 3 088:1	1 734:1 9 780:1	5 490:1 30 969:1
L2 [mm] = length without motor		40,8	46,6	49,5	52,4	55,3	58,2	61,1	64,0
L1 [mm] = length with motor		2224R...SR	45,4	50,7	53,6	56,5	59,4	62,3	65,2
	2230F/R...S	51,2	56,5	59,4	62,3	65,2	68,1	71,0	73,9
	2232R...SR	53,4	58,7	61,6	64,5	67,4	70,3	73,2	76,1
	2233F/R...S	53,8	59,1	62,0	64,9	67,8	70,7	73,6	76,5
	AM2224...14	48,9	54,2	57,1	60,0	62,9	65,8	68,7	71,6
									74,5

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Reduction ratios from 55 057:1 to 983 447:1 are available on request.

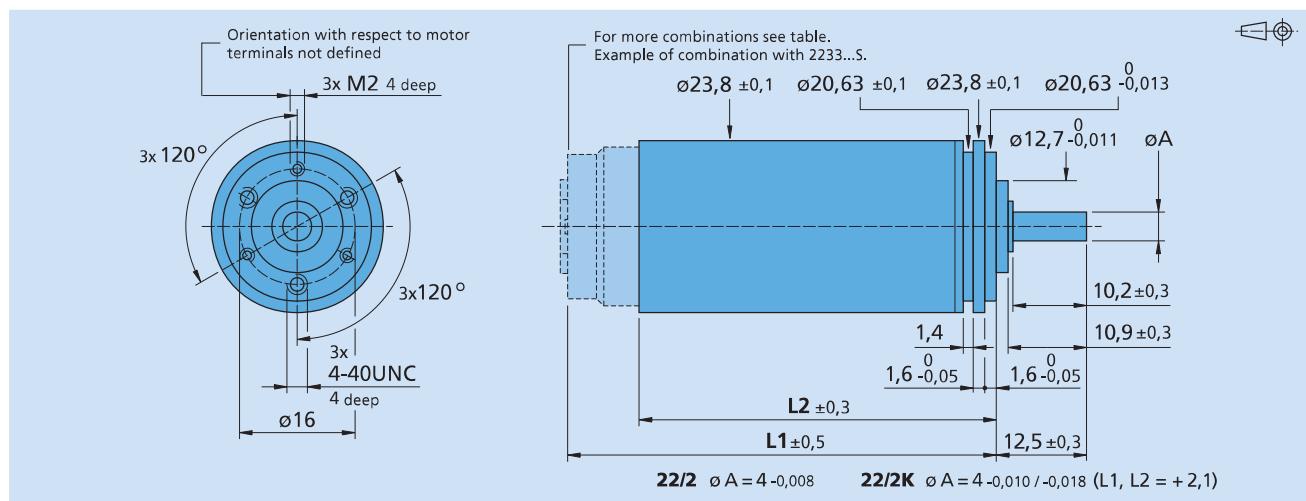

Spur Gearheads

Zero Backlash

0,1 Nm

For combination with
DC-Micromotors
Stepper Motors

Series 22/5


	22/5
Housing material	metal
Geartrain material	metal
Recommended max. input speed for:	
– continuous operation	4 000 min ⁻¹
Backlash, at no-load	0 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (6 mm from mounting face)	≤ 100 N
– axial	≤ 5 N
Shaft press fit force, max.	≤ 5 N
Shaft play	
– radial (6 mm from mounting face)	≤ 0,03 mm
– axial	= 0 mm
Operating temperature range	- 30 ... + 100 °C

Technical data

	5	6	7	8	9	
Continuous torque	mNm	100	100	100	100	
Intermittent torque	mNm	400	400	400	400	
Mass without motor, ca.	g	80	85	90	95	105
Efficiency, max.		-	-	-	-	-
Direction of rotation, drive to output		≠	=	≠	=	≠
Reduction ratio ¹⁾ (rounded)		69,2:1	161:1	377:1	879:1	2 050:1
L2 [mm] = length without motor		50,9	54,6	59,5	63,2	68,1
L1 [mm] = length with motor		2224R...SR	57,8	61,6	66,5	70,3
		2230F/R...S	63,6	67,4	72,3	76,1
		2232R...SR	65,8	69,6	74,5	78,3
		2233F/R...S	66,2	70,0	74,9	78,7
		AM2224...14	61,4	65,2	70,1	73,9
						78,8

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

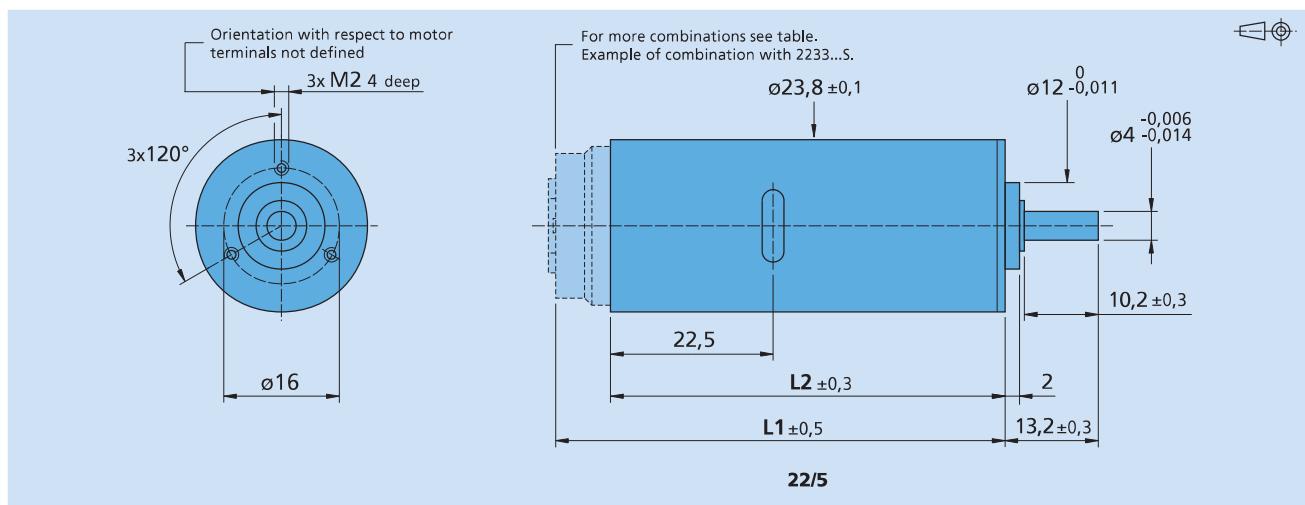

Planetary Gearheads

0,7 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors


Series 22/7

		22/7				
Housing material		metal				
Geartrain material		steel				
Recommended max. input speed for:						
– continuous operation		4 000 min ⁻¹				
Backlash, at no-load		≤ 1 °				
Bearings on output shaft		ball bearings, preloaded				
Shaft load, max.:						
– radial (10 mm from mounting face)		≤ 170 N				
– axial		≤ 150 N				
Shaft press fit force, max.		≤ 150 N				
Shaft play						
– radial (10 mm from mounting face)		≤ 0,03 mm				
– axial		≤ 0,1 mm				
Operating temperature range		- 30 ... + 100 °C				
Technical data						
Number of gear stages		1	2	3	4	5
Continuous torque	mNm	200	300	700	700	700
Intermittent torque	mNm	400	600	1 000	1 000	1 000
Mass without motor, ca.	g	68	63	76	88	102
Efficiency, max.	%	88	80	70	60	55
Direction of rotation, drive to output		=	=	=	=	=
Reduction ratio ¹⁾ (rounded)		3,71:1	9,7:1 14:1	43:1 66:1	94:1 112:1 134:1 159:1 190:1 246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ²⁾		27,9	34,1	40,3	46,4	52,6
L1 [mm] = length with motor	2224U...SR	48,2	54,4	60,6	66,7	72,9
	2230U...S	54,0	60,2	66,4	72,5	78,7
	2232U...SR	56,2	62,4	68,6	74,7	80,9
	2233U...S	56,6	62,8	69,0	75,1	81,3
	2237S...CXR	64,9	71,1	77,3	83,4	89,6
	2342S...CR	69,9	76,1	82,3	88,4	94,6
	2232S...BX4	61,7	67,9	74,1	80,2	86,4
	2250S...BX4(S)	79,7	85,9	92,1	98,2	104,4
	2444S...B	71,9	78,1	84,3	90,4	96,6
	AM2224...10	51,7	57,9	64,1	70,2	76,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ L2 - 3,9 mm, in combination with 2224U...SR, 2230U...S, 2232U...SR, 2233U...S and AM2224.

Note: Reduction ratio 3,71:1 with motor types 2224U...SR, 2230U...S, 2232U...SR, 2233U...S and AM2224 shall be ordered as 22/7 3,71:1 - K288.

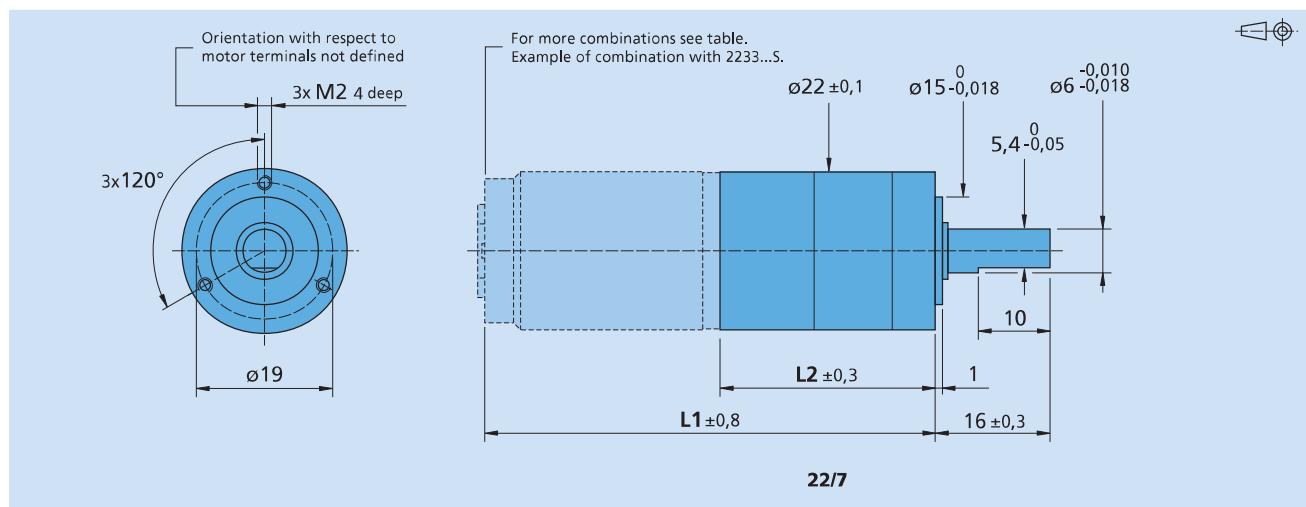

Planetary Gearheads

0,7 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors


Series 23/1

	23/1
Housing material	metal
Geartrain material	steel
Recommended max. input speed for:	
– continuous operation	4 000 min ⁻¹
Backlash, at no-load	≤ 1 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (10 mm from mounting face)	≤ 170 N
– axial	≤ 150 N
Shaft press fit force, max.	≤ 150 N
Shaft play	
– radial (10 mm from mounting face)	≤ 0,03 mm
– axial	≤ 0,1 mm
Operating temperature range	- 30 ... + 100 °C
Technical data	
Number of gear stages	1 2 3 4 5
Continuous torque mNm	200 300 700 700 700
Intermittent torque mNm	400 600 1 000 1 000 1 000
Mass without motor, ca. g	60 70 90 100 110
Efficiency, max. %	88 80 70 60 55
Direction of rotation, drive to output	= = = = =
Reduction ratio ¹⁾ (rounded)	3,71:1 9,7:1 43:1 94:1 415:1 14:1 66:1 112:1 592:1 134:1 159:1 190:1 989:1 246:1
L2 [mm] = length without motor ²⁾	27,9 34,1 40,3 46,4 52,6
L1 [mm] = length with motor	2224U...SR 48,2 54,4 60,6 66,7 72,9 2230U...S 54,0 60,2 66,4 72,5 78,7 2232U...SR 56,2 62,4 68,6 74,7 80,9 2233U...S 56,6 62,8 69,0 75,1 81,3 2237S...CXR 64,9 71,1 77,3 83,4 89,6 2342S...CR 69,9 76,1 82,3 88,4 94,6 2057S...B 84,9 91,1 97,3 103,4 109,6 2444S...B 71,9 78,1 84,3 90,4 96,6 AM2224...10 51,7 57,9 64,1 70,2 76,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ L2 - 3,9 mm, in combination with 2224U...SR, 2230U...S, 2232U...SR, 2233U...S and AM2224.

Note: Reduction ratio 3,71:1 with motor types 2224U...SR, 2230U...S, 2232U...SR, 2233U...S and AM2224 shall be ordered as 23/1 3,71:1 - K288.

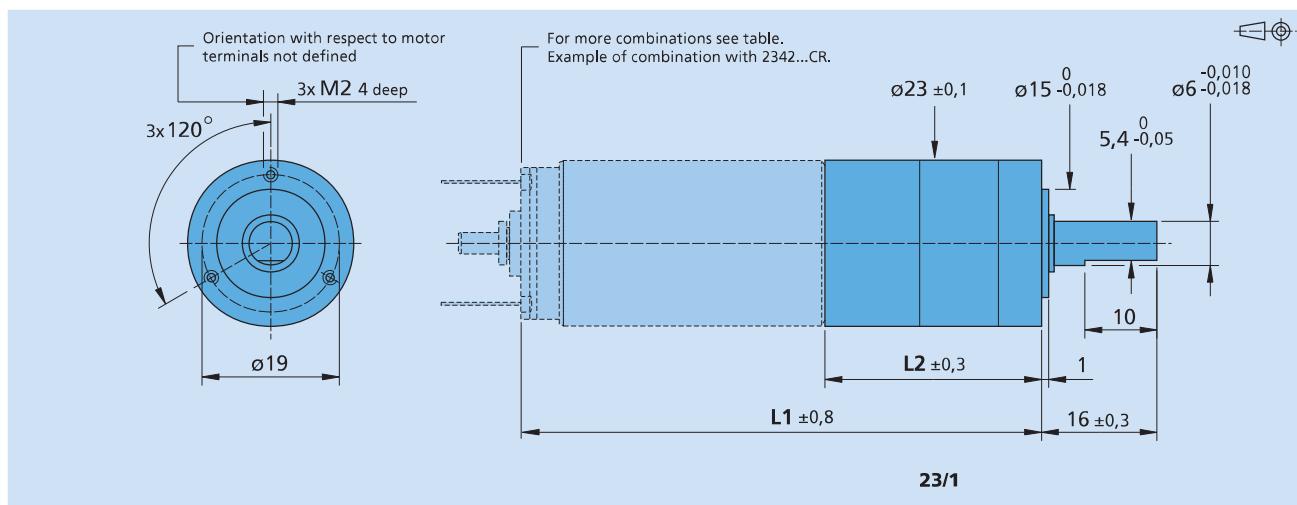

Planetary Gearheads

1 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 26A

	26A	26AK
Housing material	plastic	plastic
Geartrain material	plastic	plastic
Recommended max. input speed for:		
- continuous operation	5 000 min ⁻¹	5 000 min ⁻¹
Backlash, at no-load	≤ 3 °	≤ 3 °
Bearings on output shaft	sintered bearings	ball bearings
Shaft load, max.:		
- radial (10 mm from mounting face)	≤ 4 N	≤ 60 N
- axial	≤ 4 N	≤ 15 N
Shaft press fit force, max.	≤ 20 N	≤ 20 N
Shaft play		
- radial (10 mm from mounting face)	≤ 0,08 mm	≤ 0,1 mm
- axial	≤ 0,25 mm	≤ 0,25 mm
Operating temperature range	- 30 ... + 65 °C	- 30 ... + 85 °C


Technical data

	2	2	3	3	4	4
Continuous torque	mNm	300	300	750	800	900
Intermittent torque	mNm	500	600	1 100	1 200	1 400
Mass without motor, ca.	g	21	21	23	23	25
Efficiency, max.	%	81	81	73	73	64
Direction of rotation, drive to output		=	=	=	=	=
Reduction ratio ¹⁾ (rounded)		13:1	16:1	40:1	50:1 64:1	124:1
						158:1 201:1 256:1

L2 [mm] = length without motor	32,7	32,7	38,5	38,5	44,3	44,3
L1 [mm] = length with motor	2232U...SR	67,4	67,4	73,2	73,2	79,0
	2237S...CR	69,7	69,7	75,5	75,5	81,3
	2342S...CR	74,7	74,7	80,5	80,5	86,3
	2642W...CR/CXR	74,7	74,7	80,5	80,5	86,3
	2657W...CR/CXR	89,7	89,7	95,5	95,5	101,3
	2668W...CR	100,7	100,7	106,5	106,5	112,3
	2232S...BX4	66,5	66,5	72,3	72,3	78,1
	2250S...BX4(S)	84,5	84,5	90,3	90,3	96,1
	3216W...BXTH	49,5	49,5	55,3	55,3	61,1
	3216W...BXTR	48,7	48,7	54,5	54,5	60,3

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: These gearheads are available only with motors mounted.

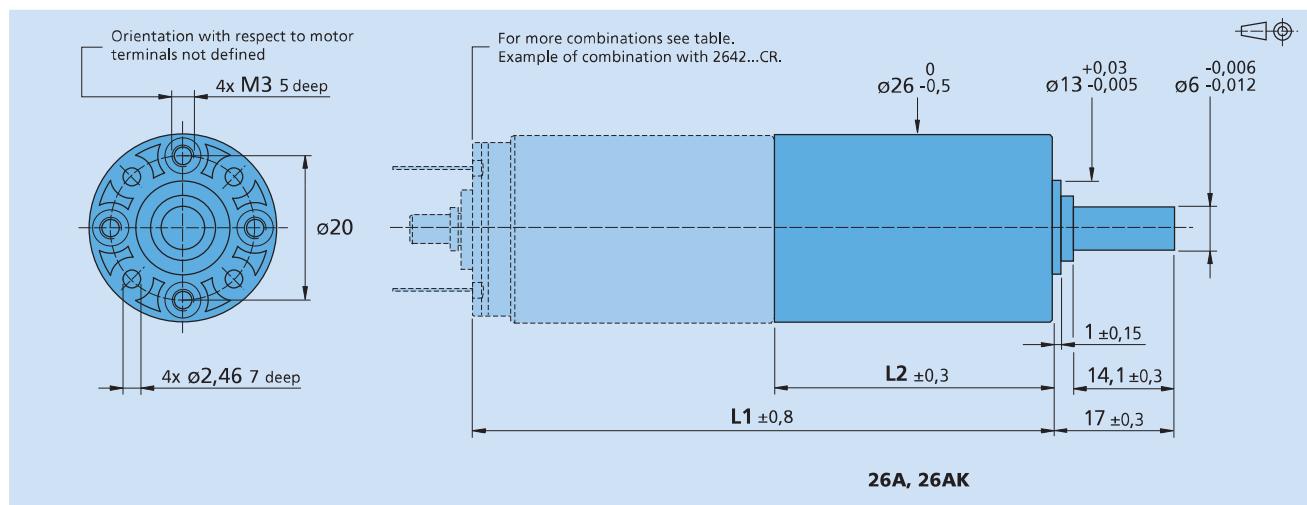

Planetary Gearheads

3,5 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Stepper Motors

Series 26/1


	26/1
Housing material	steel
Geartrain material ¹⁾	plastic/steel
Recommended max. input speed for:	
– continuous operation	4 000 min ⁻¹
Backlash, at no-load	$\leq 1^\circ$
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (10 mm from mounting face)	$\leq 150 \text{ N}$
– axial	$\leq 100 \text{ N}$
Shaft press fit force, max.	$\leq 150 \text{ N}$
Shaft play	
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$
– axial	$\leq 0,1 \text{ mm}$
Operating temperature range	- 30 ... + 100 °C

Technical data

	1	2	3	3	4	4	5	
Number of gear stages	1	2	3	3	4	4	5	
Continuous torque	Nm	1,1	0,3	1	1,5	2,5	3,5	
Intermittent torque	Nm	2,3	0,4	1,2	1,8	3,5	4,5	
Mass without motor, ca.	g	93	116	139	139	162	162	185
Efficiency, max.	%	88	80	70	70	60	60	55
Direction of rotation, drive to output		=	=	=	=	=	=	
Reduction ratio ²⁾ (rounded)		3,71:1	14:1	43:1	66:1	134:1	159:1 246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor	28,4	36,4	44,4	44,4	52,4	52,4	60,5	
L1 [mm] = length with motor	2342S...CR	70,4	78,4	86,4	94,4	94,4	102,5	
	2642W...CR/CXR	70,4	78,4	86,4	94,4	94,4	102,5	
	2657W...CR/CXR	85,4	93,4	101,4	101,4	109,4	109,4	117,5
	2668W...CR	96,4	104,4	112,4	112,4	120,4	120,4	128,5
	2444S...B	72,4	80,4	88,4	88,4	96,4	96,4	104,5
	AM2224R3...30	59,3	67,3	75,3	75,3	83,3	83,3	91,4

¹⁾ Gearheads with ratios < 14:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

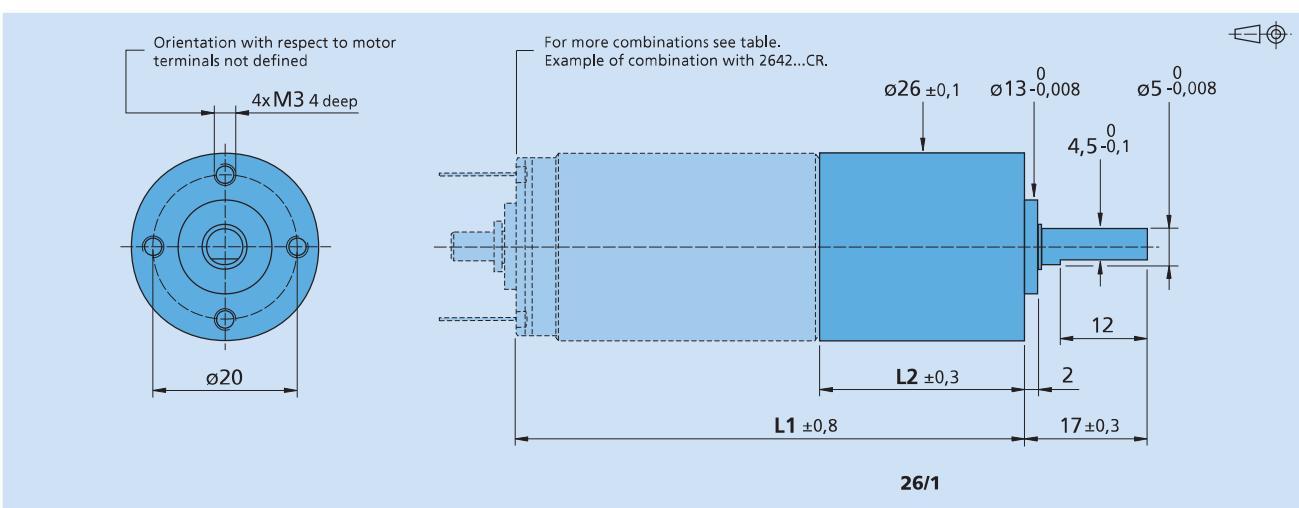

26/1

Planetary Gearheads

3,5 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Motion Control Systems

Series 26/1R


	26/1R								
Housing material	metal								
Geartrain material	steel								
Backlash, at no-load	$\leq 1^\circ$								
Bearings on output shaft	ball bearings, preloaded								
Shaft load, max.:									
– radial (10 mm from mounting face)	$\leq 150 \text{ N}$								
– axial	$\leq 100 \text{ N}$								
Shaft press fit force, max.	$\leq 150 \text{ N}$								
Shaft play									
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$								
– axial	$\leq 0,1 \text{ mm}$								
Operating temperature range	$-10 \dots +125^\circ\text{C}$								

Specifications

	1	2	2	3	3	3	4	5	5
Continuous torque ¹⁾	Nm	0,4	1	1,5	1,8	2,5	3	3,5	3,5
Intermittent torque	Nm	0,6	1,2	1,8	2,2	3	3,6	4,5	4,5
Max. continuous input speed ¹⁾	min ⁻¹	7 000	7 500	7 500	9 000	9 000	9 000	9 000	9 000
Max. intermittent input speed	min ⁻¹	8 500	8 500	9 000	10 000	10 000	10 000	10 000	10 000
Mass without motor, ca.	g	93	116	116	139	139	139	162	185
Efficiency, max.	%	91	83	83	75	75	75	69	62
Direction of rotation, drive to output	=	=	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)		3,71:1	9,7:1 14:1	23:1	43:1	66:1	86:1	134:1 159:1 246:1	415:1 592:1 989:1
L2 [mm] = length without motor		28,4	36,4	36,4	44,4	44,4	44,4	52,4	60,5
L1 [mm] = length with motor		70,4	78,4	78,4	86,4	86,4	86,4	94,4	102,5
2342S...CR		70,4	78,4	78,4	86,4	86,4	86,4	94,4	102,5
2642W...CR		70,4	78,4	78,4	86,4	86,4	86,4	94,4	102,5
2642W...CXR		70,4	78,4	78,4	86,4	86,4	86,4	94,4	102,5
2657W...CR		85,4	93,4	93,4	101,4	101,4	101,4	109,4	117,5
2657W...CXR		85,4	93,4	93,4	101,4	101,4	101,4	109,4	117,5
2668W...CR		96,4	104,4	104,4	112,4	112,4	112,4	120,4	128,5
2444S...B		72,4	80,4	80,4	88,4	88,4	88,4	96,4	104,5
2264W...BP4		92,4	100,4	100,4	108,4	108,4	108,4	116,4	124,5
2214S...BXT H		43,2	51,2	51,2	59,2	59,2	59,2	67,2	75,3
2214S...BXT R		42,4	50,4	50,4	58,4	58,4	58,4	66,4	74,5
3216W...BXT H		45,2	53,2	53,2	61,2	61,2	61,2	69,2	77,3
3216W...BXT R		44,4	52,4	52,4	60,4	60,4	60,4	68,4	76,5
AM2224R3...30		59,3	67,3	67,3	75,3	75,3	75,3	83,3	91,4

¹⁾ Max. continuous input speed and continuous output torque are both dependent on the reduction ratio and related to the max. output power. They cannot simultaneously be applied at their maximum values for an extended period. For more information, please contact your local sales representative.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

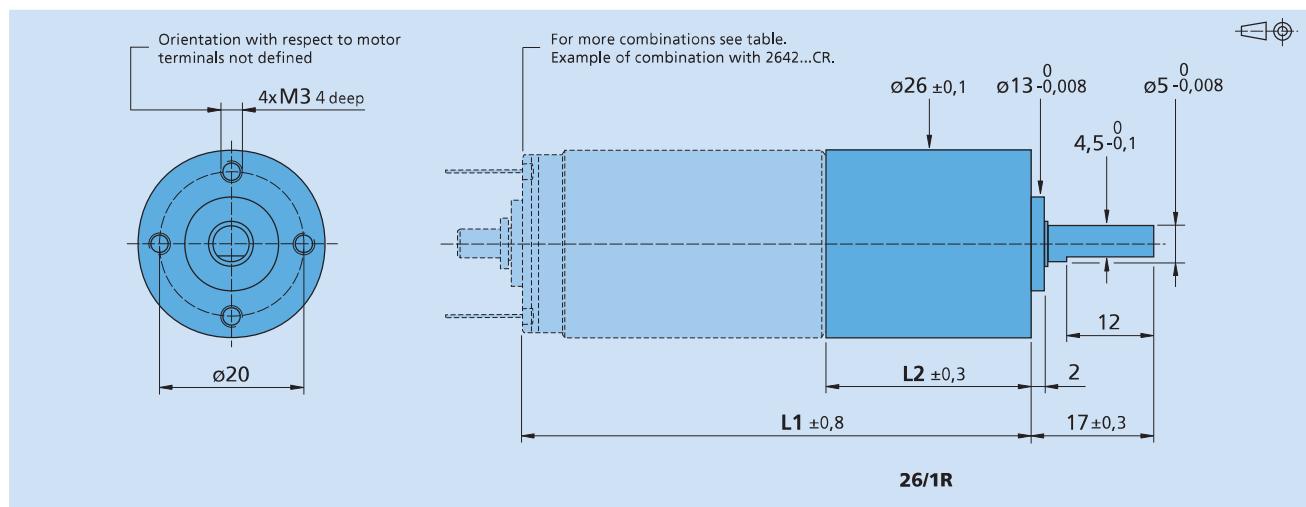

Planetary Gearheads

4,5 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 30/1

	30/1
Housing material	metal
Geartrain material ¹⁾	plastic/steel
Recommended max. input speed for:	
– continuous operation	4 000 min ⁻¹
Backlash, at no-load	≤ 1 °
Bearings on output shaft	ball bearings
Shaft load, max.:	
– radial (15 mm from mounting face)	≤ 150 N
– axial	≤ 150 N
Shaft press fit force, max.	≤ 200 N
Shaft play	
– radial (15 mm from mounting face)	≤ 0,03 mm
– axial	≤ 0,15 mm
Operating temperature range	- 30 ... + 100 °C


Technical data

	1	2	3	3	4	4	5
Number of gear stages							
Continuous torque	Nm	1,5	0,35	1,2	1,8	3,5	4,5
Intermittent torque	Nm	3	0,5	1,6	2,4	4,5	6
Mass without motor, ca.	g	107	139	171	171	203	235
Efficiency, max.	%	88	80	70	70	60	55
Direction of rotation, drive to output	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)	3,71:1	14:1	43:1	66:1	134:1	159:1 246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ³⁾	27,1	35,1	43,1	43,1	51,2	51,2	59,2
L1 [mm] = length with motor							
2342S...CR	69,1	77,1	85,1	85,1	93,2	93,2	101,2
2642W...CR/CXR	69,1	77,1	85,1	85,1	93,2	93,2	101,2
2657W...CR/CXR	84,1	92,1	100,1	100,1	108,2	108,2	116,2
2668W...CR	95,1	103,1	111,1	111,1	119,2	119,2	127,2
2444S...B	71,1	79,1	87,1	87,1	95,2	95,2	103,2
3056K...B	84,5	92,5	100,5	100,5	108,6	108,6	116,6
3564K...B	92,5	100,5	108,5	108,5	116,6	116,6	124,6

¹⁾ Gearheads with ratios < 14:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

³⁾ L2 + 1,4 mm, in combination with 3056K...B and 3564K...B.

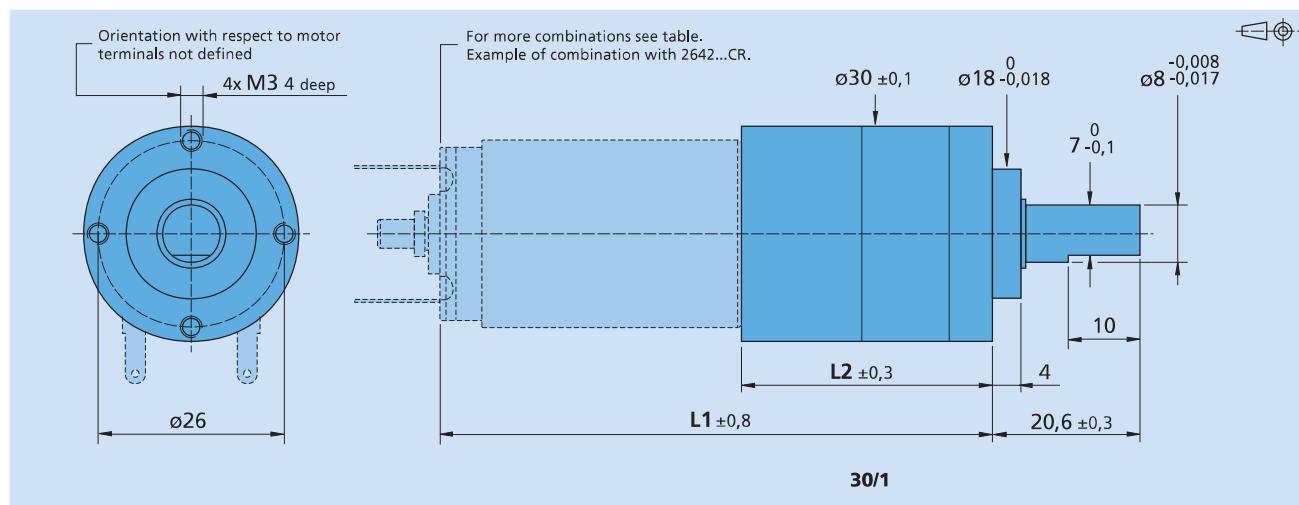

Planetary Gearheads

4,5 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 30/1 S

	30/1 S			
Housing material	metal			
Geartrain material	steel			
Recommended max. input speed for:				
- continuous operation	4 000 min ⁻¹			
Backlash, at no-load	≤ 1 °			
Bearings on output shaft	ball bearings			
Shaft load, max.:				
- radial (15 mm from mounting face)	≤ 150 N			
- axial	≤ 150 N			
Shaft press fit force, max.	≤ 200 N			
Shaft play				
- radial (15 mm from mounting face)	≤ 0,03 mm			
- axial	≤ 0,15 mm			
Operating temperature range	- 30 ... + 100 °C			


Technical data

	2	3	4	5		
Continuous torque	Nm	4,5	4,5	4,5	4,5	
Intermittent torque	Nm	6	6	6	6	
Mass without motor, ca.	g	139	171	203	235	
Efficiency, max.	%	80	70	60	55	
Direction of rotation, drive to output		=	=	=	=	
Reduction ratio ¹⁾ (rounded)		9,7:1 14:1 23:1	43:1 66:1 86:1	134:1 159:1 246:1	415:1 592:1 989:1 1 526:1	
L2 [mm] = length without motor ²⁾		35,1	43,1	51,2	59,2	
L1 [mm] = length with motor		2342S...CR 2642W...CR/CXR 2657W...CR/CXR 2668W...CR 2444S...B 3056K...B 3564K...B	77,1 77,1 92,1 103,1 79,1 92,5 100,5	85,1 85,1 93,2 100,1 87,1 100,5 108,5	93,2 101,2 101,2 108,2 95,2 108,6 116,6	101,2 101,2 116,2 127,2 103,2 116,6 124,6

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ L2 + 1,4 mm, in combination with 3056K...B and 3564K...B.

Note: The gearheads as S-type have all steel gears and heavy duty lubricant for extended lifetime performance.

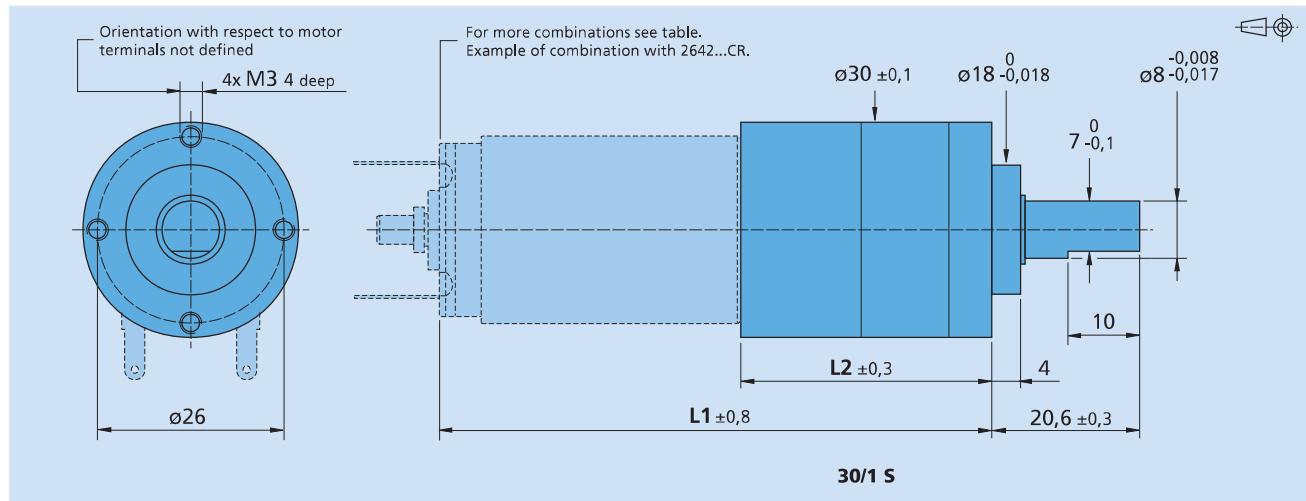

Planetary Gearheads


4,5 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 32A

	32A				
Housing material	metal				
Geartrain material	steel				
Recommended max. input speed for:					
– continuous operation	3 000 min ⁻¹				
Backlash, at no-load	$\leq 2^\circ$				
Bearings on output shaft	ball bearings				
Shaft load, max.:					
– radial (10 mm from mounting face)	$\leq 100 \text{ N}$				
– axial	$\leq 30 \text{ N}$				
Shaft press fit force, max.	$\leq 120 \text{ N}$				
Shaft play					
– radial (10 mm from mounting face)	$\leq 0,1 \text{ mm}$				
– axial	$\leq 0,3 \text{ mm}$				
Operating temperature range	- 25 ... + 80 °C				
Technical data					
Number of gear stages	1	2	3	4	
Continuous torque	Nm	0,75	2,25	4,5	
Intermittent torque	Nm	1	3	6	
Mass without motor, ca.	g	150	195	240	
Efficiency, max.	%	88	85	75	
Direction of rotation, drive to output	=	=	=	=	
Reduction ratio ¹⁾ (rounded)	4:1 7:1	14:1 19:1 25:1 29:1 46:1	68:1 93:1 124:1 169:1 236:1 308:1	344:1 626:1 1 140:1 2 076:1	
L2 [mm] = length without motor	37,8	47,3	56,8	66,4	
L1 [mm] = length with motor	2642W...CR/CXR 2657W...CR/CXR 2668W...CR 3242G...CR 3257G...CR 3272G...CR 2264W...BP4 3242G...BX4 3268G...BX4 3274G...BP4 4221G...BXTH 4221G...BXR	79,8 94,8 105,8 79,8 94,8 109,8 101,8 82,0 108,0 111,8 59,8 59,0	89,3 104,3 115,3 89,3 104,3 119,3 111,3 91,5 117,5 121,3 69,3 68,5	98,8 113,8 124,8 98,8 113,8 128,8 120,8 101,0 127,0 130,8 78,8 78,0	108,4 123,4 134,4 108,4 123,4 138,4 130,4 110,6 136,6 140,4 88,4 87,6

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

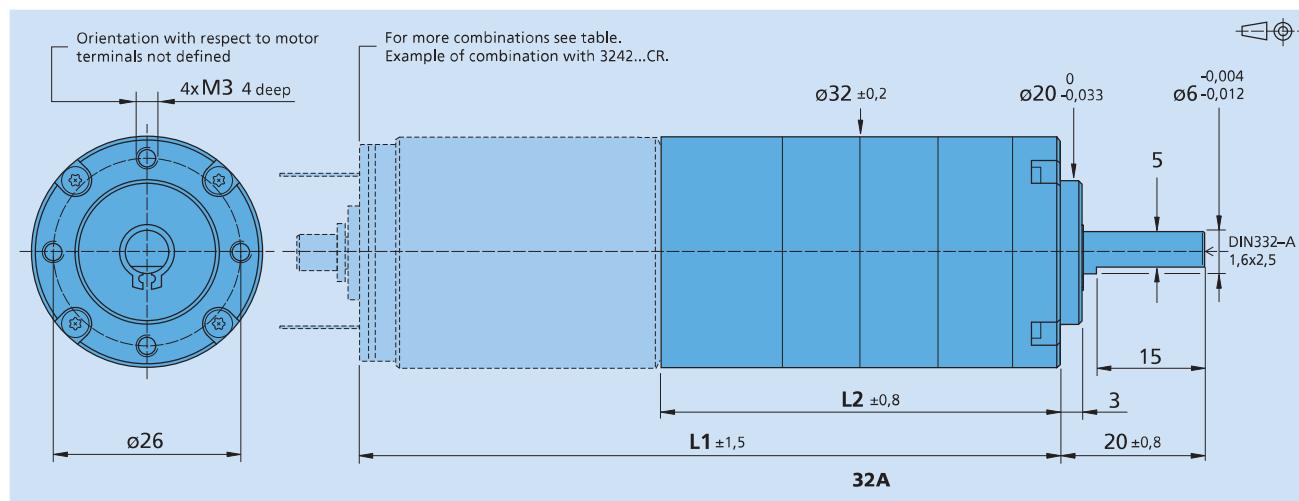

Planetary Gearheads

Low noise

4,5 Nm


For combination with
DC-Micromotors
Brushless DC-Motors

Series 32ALN

	32ALN				
Housing material	metal				
Geartrain material	plastic/steel				
Recommended max. input speed for:					
– continuous operation	3 000 min ⁻¹				
Backlash, at no-load	$\leq 2^\circ$				
Bearings on output shaft	ball bearings				
Shaft load, max.:					
– radial (10 mm from mounting face)	$\leq 100 \text{ N}$				
– axial	$\leq 30 \text{ N}$				
Shaft press fit force, max.	$\leq 120 \text{ N}$				
Shaft play					
– radial (10 mm from mounting face)	$\leq 0,1 \text{ mm}$				
– axial	$\leq 0,3 \text{ mm}$				
Operating temperature range	$-15 \dots +65^\circ\text{C}$				
Technical data					
Number of gear stages	1	2	3	4	
Continuous torque	Nm	0,75	2,25	4,5	
Intermittent torque	Nm	1	3	6	
Mass without motor, ca.	g	125	195	240	
Efficiency, max.	%	88	85	75	
Direction of rotation, drive to output	=	=	=	=	
Reduction ratio ¹⁾ (rounded)	4:1 7:1	14:1 19:1 25:1 29:1 46:1	68:1 93:1 124:1 169:1 236:1 308:1	344:1 626:1 1 140:1 2 076:1	
L2 [mm] = length without motor	37,8	47,3	56,8	66,4	
L1 [mm] = length with motor	2642W...CR 2657W...CR 2668W...CR 3242G...CR 3257G...CR 3272G...CR 2264W...BP4 3242G...BX4 3268G...BX4 3274G...BP4	79,8 94,8 105,8 79,8 94,8 109,8 101,8 82,0 108,0 111,8	89,3 104,3 115,3 89,3 104,3 119,3 111,3 91,5 117,5 121,3	98,8 113,8 124,8 98,8 113,8 128,8 120,8 101,0 127,0 130,8	108,4 123,4 134,4 108,4 123,4 138,4 130,4 110,6 136,6 140,4

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note: Motor option - 3888 is required for combination with 2642W...CR, 2657W...CR, 2668W...CR, 3242G...CR, 3257G...CR and 3272G...CR.

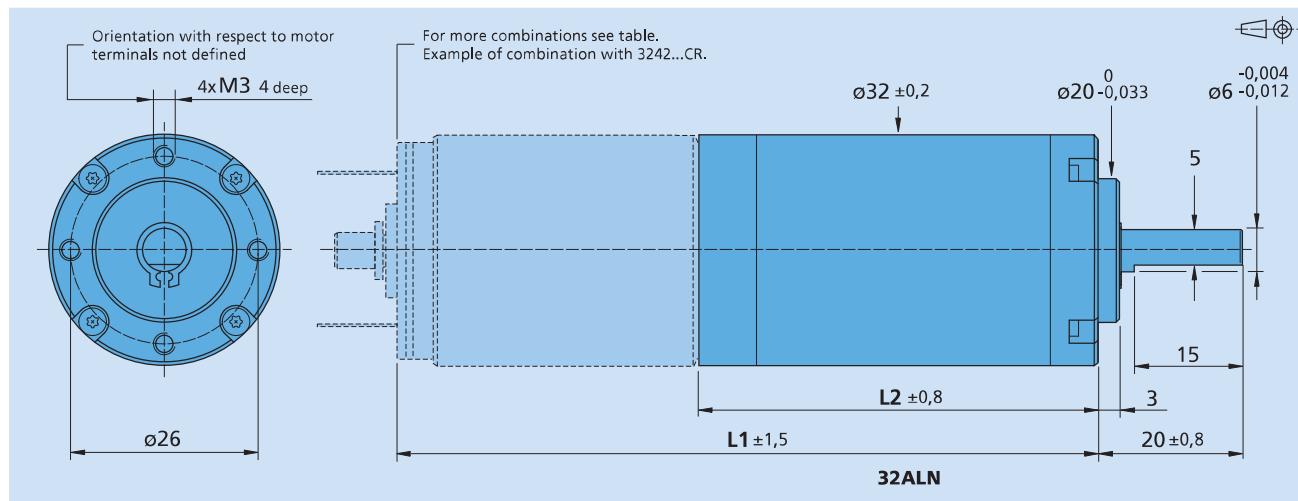

Planetary Gearheads

7 Nm

For combination with
DC-Micromotors
Brushless DC-Motors


Series 32/3

	32/3
Housing material	metal
Geartrain material ¹⁾	plastic/steel
Recommended max. input speed for:	
– continuous operation	4 000 min ⁻¹
Backlash, at no-load	≤ 1 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (10 mm from mounting face)	≤ 200 N
– axial	≤ 200 N
Shaft press fit force, max.	≤ 250 N
Shaft play	
– radial (10 mm from mounting face)	≤ 0,03 mm
– axial	≤ 0,15 mm
Operating temperature range	- 20 ... + 125 °C

Technical data									
Number of gear stages	1	2	3	3	4	4	4	5	5
Continuous torque	Nm	4,2	0,4	1,4	2	4	4,9	5,8	7
Intermittent torque	Nm	5,3	0,6	1,9	2,6	5,2	6,5	8	10
Mass without motor, ca.	g	160	190	230	230	260	260	260	300
Efficiency, max.	%	88	80	70	70	60	60	60	55
Direction of rotation, drive to output	=	=	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)	3,71:1	14:1	43:1	66:1	134:1	159:1	246:1	415:1 592:1 989:1	1 526:1
L2 [mm] = length without motor	33,9	41,6	49,4	49,4	57,2	57,2	57,2	65,0	65,0
L1 [mm] = length with motor	2668W...CR	101,9	109,6	117,4	117,4	125,2	125,2	125,2	133,0
	3242G...CR	75,9	83,6	91,4	91,4	99,2	99,2	99,2	107,0
	3257G...CR	90,9	98,6	106,4	106,4	114,2	114,2	114,2	122,0
	3272G...CR	105,9	113,6	121,4	121,4	129,2	129,2	129,2	137,0
	3242G...BX4	78,1	85,8	93,6	93,6	101,4	101,4	101,4	109,2
	3268G...BX4	104,1	111,8	119,6	119,6	127,4	127,4	127,4	135,2
	3274G...BP4	107,9	115,6	123,4	123,4	131,2	131,2	131,2	139,0
	3564K...B	97,9	105,6	113,4	113,4	121,2	121,2	121,2	129,0

¹⁾ Gearheads with ratios < 14:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

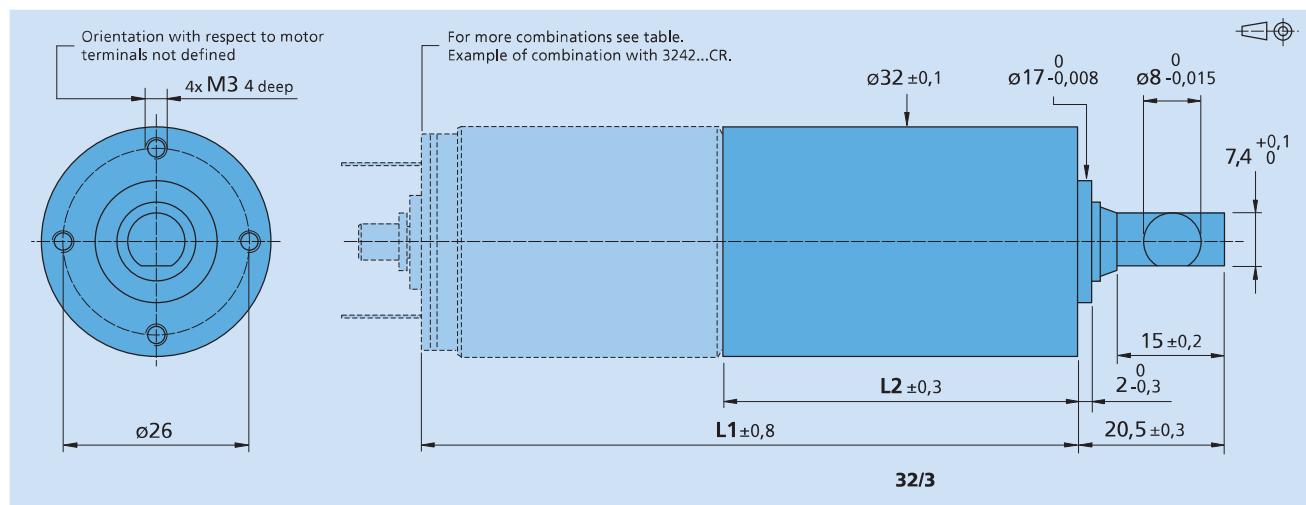

Planetary Gearheads

7 Nm

For combination with
DC-Micromotors
Brushless DC-Motors
Motion Control Systems

Series 32/3R


	32/3R								
Housing material	metal								
Geartrain material	steel								
Backlash, at no-load	$\leq 1^\circ$								
Bearings on output shaft	ball bearings, preloaded								
Shaft load, max.:									
– radial (10 mm from mounting face)	≤ 200 N								
– axial	≤ 200 N								
Shaft press fit force, max.	≤ 250 N								
Shaft play									
– radial (10 mm from mounting face)	$\leq 0,03$ mm								
– axial	$\leq 0,15$ mm								
Operating temperature range	- 10 ... + 125 °C								

Specifications

	1	2	2	3	3	3	4	5	5
Continuous torque ¹⁾	Nm	1	1,6	3	3,5	4	5	7	7
Intermittent torque	Nm	1,2	1,9	3,6	4,2	4,8	6	9,5	9,5
Max. continuous input speed ¹⁾	min ⁻¹	6 000	7 000	7 000	8 000	8 000	8 000	8 000	8 000
Max. intermittent input speed	min ⁻¹	7 000	8 000	8 000	9 000	9 000	9 000	9 000	9 000
Mass without motor, ca.	g	160	195	195	230	230	265	300	300
Efficiency, max.	%	91	83	83	75	75	69	62	62
Direction of rotation, drive to output	=	=	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)		3,71:1	14:1	23:1	43:1	66:1	86:1	134:1 159:1 246:1	415:1 592:1 989:1
L2 [mm] = length without motor		33,9	41,6	41,6	49,4	49,4	49,4	57,2	65,0
L1 [mm] = length with motor	2668W...CR	101,9	109,6	109,6	117,4	117,4	117,4	125,2	133,0
	3242G...CR	75,9	83,6	83,6	91,4	91,4	91,4	99,2	107,0
	3257G...CR	90,9	98,6	98,6	106,4	106,4	106,4	114,2	122,0
	3272G...CR	105,9	113,6	113,6	121,4	121,4	121,4	129,2	137,0
	2264W...BP4	97,9	105,6	105,6	113,4	113,4	113,4	121,2	129,0
	3242G...BX4	78,1	85,8	85,8	93,6	93,6	93,6	101,4	109,2
	3268G...BX4	104,1	111,8	111,8	119,6	119,6	119,6	127,4	135,2
	3274G...BP4	107,9	115,6	115,6	123,4	123,4	123,4	131,2	139,0
	3564K...B	97,9	105,6	105,6	113,4	113,4	113,4	121,2	129,0
	3216W...BXT H	50,7	58,4	58,4	66,2	66,2	66,2	74,0	81,8
	3216W...BXT R	49,9	57,6	57,6	65,4	65,4	65,4	73,2	81,0

¹⁾ Max. continuous input speed and continuous output torque are both dependent on the reduction ratio and related to the max. output power. They cannot simultaneously be applied at their maximum values for an extended period. For more information, please contact your local sales representative.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

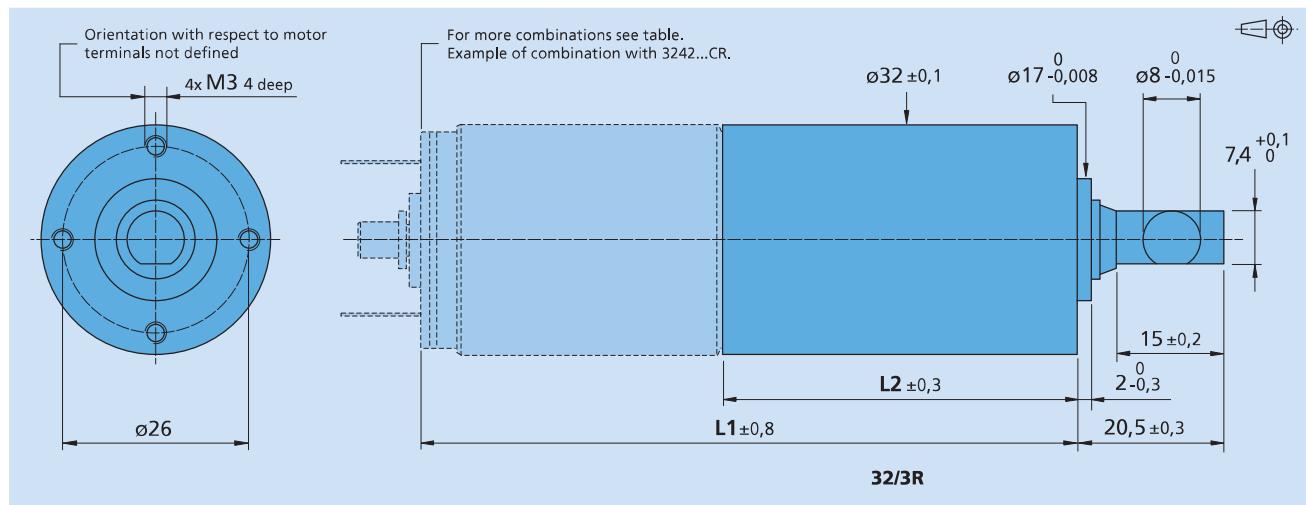

Planetary Gearheads

20 Nm


For combination with
DC-Micromotors
Brushless DC-Motors

Series 38A

	38A							
Housing material	steel							
Geartrain material	steel							
Recommended max. input speed for:								
– continuous operation	4 500 min ⁻¹							
Backlash, at no-load	$\leq 0,5^\circ$							
Bearings on output shaft	ball bearings							
Shaft load, max.:								
– radial (14,5 mm from mounting face)	$\leq 200 \text{ N}$							
– axial	$\leq 200 \text{ N}$							
Shaft press fit force, max.	$\leq 490 \text{ N}$							
Shaft play								
– radial (14,5 mm from mounting face)	$\leq 0,02 \text{ mm}$							
– axial	$\leq 0,3 \text{ mm}$							
Operating temperature range	- 25 ... + 90 °C							
Technical data								
Number of gear stages	1	2	2	3	3	4	4	
Continuous torque	Nm	6	20	18	20	18	18	
Intermittent torque	Nm	9,6	32	29	32	29	29	
Mass without motor, ca.	g	190	260	260	330	330	410	
Efficiency, max.	%	96	94	94	90	90	80	
Direction of rotation, drive to output		=	=	=	=	=	=	
Reduction ratio (exact)		4:1 5:1	12:1 16:1 20:1	25:1	36:1 45:1 60:1 80:1 100:1 120:1 160:1	200:1	240:1 360:1 480:1 800:1	1 600:1
L2 [mm] = length without motor ¹⁾	42,2	55,0	55,0	67,6	67,6	80,2	80,2	
L1 [mm] = length with motor 3242G...CR	78,8	91,6	91,6	104,2	104,2	116,8	116,8	
3257G...CR	93,8	106,6	106,6	119,2	119,2	131,8	131,8	
3272G...CR	108,8	121,6	121,6	134,2	134,2	146,8	146,8	
3863H...CR	113,6	126,4	126,4	139,0	139,0	151,6	151,6	
3890H...CR	139,6	152,4	152,4	165,0	165,0	177,6	177,6	
3242G...BX4	81,0	93,8	93,8	106,4	106,4	119,0	119,0	
3268G...BX4	107,0	119,8	119,8	132,4	132,4	145,0	145,0	
3274G...BP4	110,8	123,6	123,6	136,2	136,2	148,8	148,8	
3564K...B	106,2	119,0	119,0	131,6	131,6	144,2	144,2	
4490H...B/BS	139,6	152,4	152,4	165,0	165,0	177,6	177,6	

¹⁾ L2 - 5,4 mm, in combination with 3242G...CR, 3257G...CR, 3272G...CR, 3242G...BX4, 3268G...BX4 and 3274G...BP4.

L2 + 7,4 mm, in combination with 3863H...CR, 3890H...CR, 4490H...B and 4490H...BS.

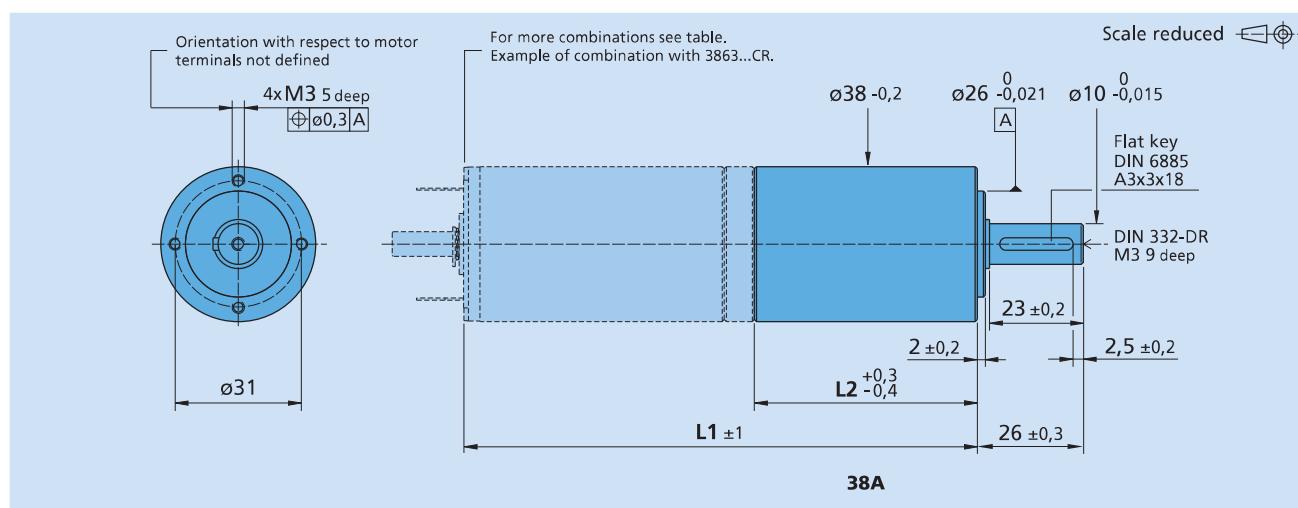

Planetary Gearheads

10 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 38/1

	38/1							
Housing material	metal							
Geartrain material ¹⁾	plastic/steel							
Recommended max. input speed for:	4 000 min ⁻¹							
– continuous operation	$\leq 1^\circ$							
Backlash, at no-load	ball bearings, preloaded							
Bearings on output shaft								
Shaft load, max.:								
– radial (10 mm from mounting face)	$\leq 300 \text{ N}$							
– axial	$\leq 300 \text{ N}$							
Shaft press fit force, max.	$\leq 350 \text{ N}$							
Shaft play								
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$							
– axial	$\leq 0,15 \text{ mm}$							
Operating temperature range	$-20 \dots +125^\circ\text{C}$							


Technical data								
Number of gear stages	1	2	3	3	4	4	4	5
Continuous torque	Nm	6	0,4	1,4	2,2	4,5	5,3	8,2
Intermittent torque	Nm	8	0,6	1,9	2,9	6	7	10
Mass without motor, ca.	g	166	215	268	268	320	320	375
Efficiency, max.	%	88	80	70	70	60	60	55
Direction of rotation, drive to output	=	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)	3,71:1	14:1	43:1	66:1	134:1	159:1	246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ³⁾	32,3	40,1	47,9	47,9	55,7	55,7	55,7	63,5
L1 [mm] = length with motor	3242G...CR	73,5	81,3	89,1	96,9	96,9	96,9	104,7
	3257G...CR	88,5	96,3	104,1	104,1	111,9	111,9	111,9
	3272G...CR	103,5	111,3	119,1	119,1	126,9	126,9	134,7
	3863A...CR	91,3	99,1	106,9	106,9	114,7	114,7	122,5
	3890A...CR	117,3	125,1	132,9	132,9	140,7	140,7	148,5
	3056K...B	88,3	96,1	103,9	103,9	111,7	111,7	119,5
	3242G...BX4	75,7	83,5	91,3	91,3	99,1	99,1	106,9
	3268G...BX4	101,7	109,5	117,3	117,3	125,1	125,1	132,9
	3274G...BP4	105,5	113,3	121,1	121,1	128,9	128,9	136,7
	3564K...B	96,3	104,1	111,9	111,9	119,7	119,7	127,5
	4221G...BXTH	53,5	61,3	69,1	69,1	76,9	76,9	84,7
	4221G...BXTR	52,7	60,5	68,3	68,3	76,1	76,1	83,9

¹⁾ Gearheads with ratios < 14:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

³⁾ L2 - 0,8 mm, in combination with 3242G...CR, 3257G...CR, 3272G...CR, 3242G...BX4, 3268G...BX4, 3274G...BP4 and 4221G...BXT R/H.

L2 - 5 mm, in combination with 3863A...CR and 3890A...CR.

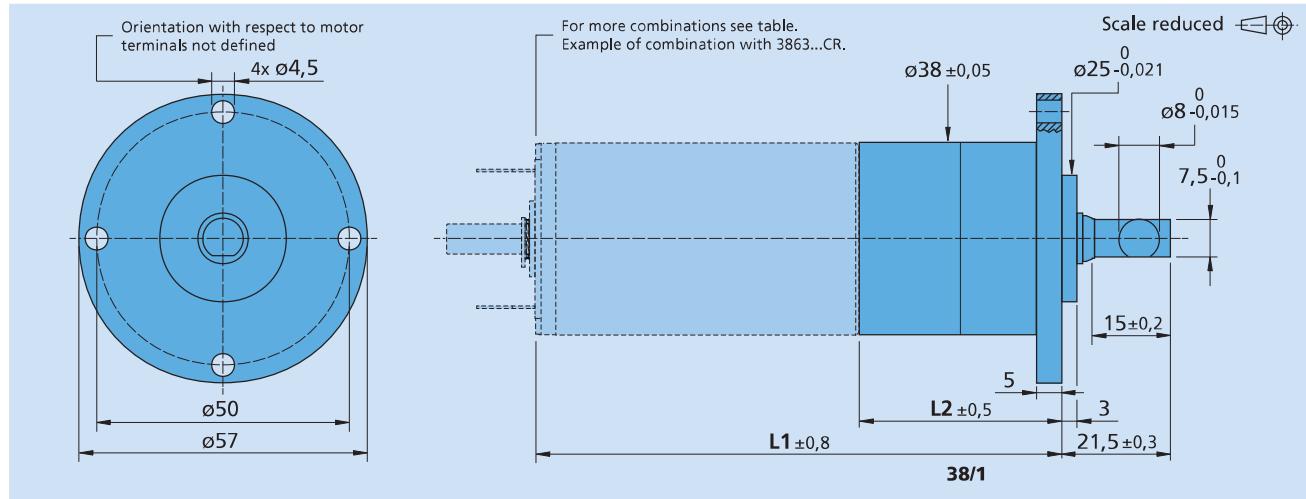

Planetary Gearheads

10 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 38/1 S


	38/1 S			
Housing material	metal			
Geartrain material	steel			
Recommended max. input speed for:				
– continuous operation	4 000 min ⁻¹			
Backlash, at no-load	$\leq 1^\circ$			
Bearings on output shaft	ball bearings, preloaded			
Shaft load, max.:				
– radial (10 mm from mounting face)	$\leq 300 \text{ N}$			
– axial	$\leq 300 \text{ N}$			
Shaft press fit force, max.	$\leq 350 \text{ N}$			
Shaft play				
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$			
– axial	$\leq 0,15 \text{ mm}$			
Operating temperature range	- 20 ... + 125 °C			
Technical data				
Number of gear stages	2	3	4	5
Continuous torque	Nm	10	10	10
Intermittent torque	Nm	15	15	15
Mass without motor, ca.	g	215	268	320
Efficiency, max.	%	80	70	60
Direction of rotation, drive to output	=	=	=	=
Reduction ratio ¹⁾ (rounded)		14:1 66:1	43:1 159:1 246:1	134:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ²⁾	40,1	47,9	55,7	63,5
L1 [mm] = length with motor	3242G...CR	81,3	89,1	96,9
	3257G...CR	96,3	104,1	111,9
	3272G...CR	111,3	119,1	126,9
	3863A...CR	99,1	106,9	114,7
	3890A...CR	125,1	132,9	140,7
	3056K...B	96,1	103,9	111,7
	3242G...BX4	83,5	91,3	99,1
	3268G...BX4	109,5	117,3	125,1
	3274G...BP4	113,3	121,1	128,9
	3564K...B	104,1	111,9	119,7
	4221G...BXTH	61,3	69,1	76,9
	4221G...BXTR	60,5	68,3	76,1
				83,9

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ L2 - 0,8 mm, in combination with 3242G...CR, 3257G...CR, 3272G...CR, 3242G...BX4, 3268G...BX4, 3274G...BP4 and 4221G...BXT R/H.

L2 - 5 mm, in combination with 3863A...CR and 3890A...CR.

Note: The gearheads as S-type have all steel gears and heavy duty lubricant for extended lifetime performance.

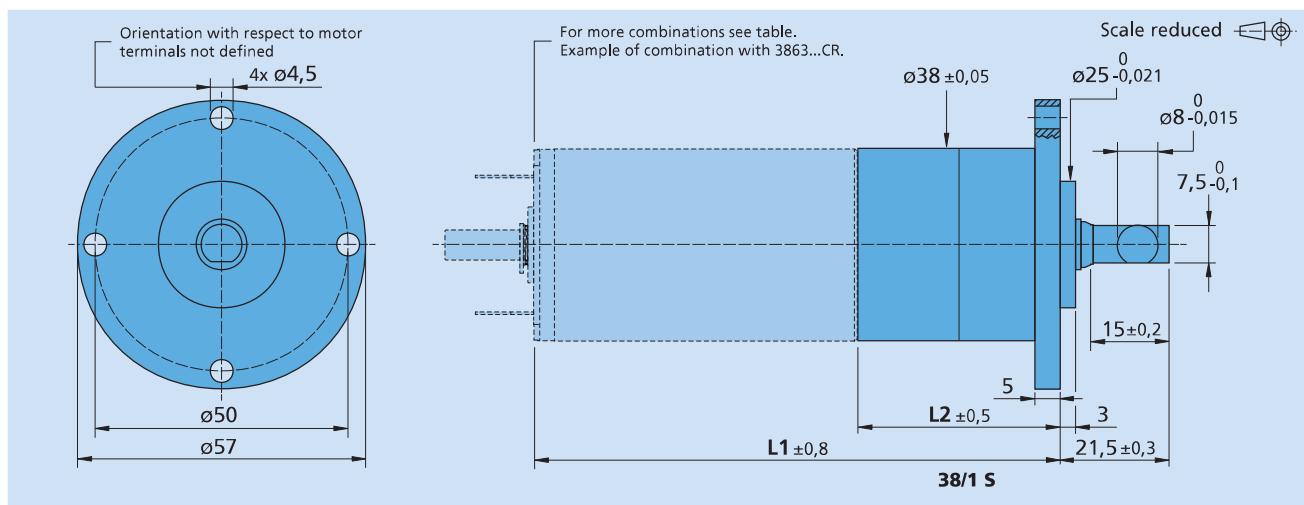

Planetary Gearheads

10 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 38/2


	38/2							
Housing material	metal							
Geartrain material ¹⁾	plastic/steel							
Recommended max. input speed for:	4 000 min ⁻¹							
– continuous operation	$\leq 1^\circ$							
Backlash, at no-load	ball bearings, preloaded							
Bearings on output shaft								
Shaft load, max.:								
– radial (10 mm from mounting face)	$\leq 300 \text{ N}$							
– axial	$\leq 300 \text{ N}$							
Shaft press fit force, max.	$\leq 350 \text{ N}$							
Shaft play								
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$							
– axial	$\leq 0,15 \text{ mm}$							
Operating temperature range	$-20 \dots +125^\circ\text{C}$							
Technical data								
Number of gear stages	1	2	3	3	4	4	4	5
Continuous torque	Nm	6	0,4	1,4	2,2	4,5	5,3	8,2
Intermittent torque	Nm	8	0,6	1,9	2,9	6	7	11
Mass without motor, ca.	g	145	195	245	245	296	296	348
Efficiency, max.	%	88	80	70	70	60	60	55
Direction of rotation, drive to output	=	=	=	=	=	=	=	=
Reduction ratio ²⁾ (rounded)	3,71:1	14:1	43:1	66:1	134:1	159:1	246:1	415:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ³⁾	32,3	40,1	47,9	47,9	55,7	55,7	55,7	63,5
L1 [mm] = length with motor	3242G...CR	73,5	81,3	89,1	96,9	96,9	96,9	104,7
	3257G...CR	88,5	96,3	104,1	104,1	111,9	111,9	111,9
	3272G...CR	103,5	111,3	119,1	119,1	126,9	126,9	134,7
	3863A...CR	91,3	99,1	106,9	106,9	114,7	114,7	122,5
	3890A...CR	117,3	125,1	132,9	132,9	140,7	140,7	148,5
	3056K...B	88,3	96,1	103,9	103,9	111,7	111,7	119,5
	3242G...BX4	75,7	83,5	91,3	91,3	99,1	99,1	106,9
	3268G...BX4	101,7	109,5	117,3	117,3	125,1	125,1	132,9
	3274G...BP4	105,5	113,3	121,1	121,1	128,9	128,9	136,7
	3564K...B	96,3	104,1	111,9	111,9	119,7	119,7	127,5
	4221G...BXTH	53,5	61,3	69,1	69,1	76,9	76,9	84,7
	4221G...BXTR	52,7	60,5	68,3	68,3	76,1	76,1	83,9

¹⁾ Gearheads with ratios < 14:1 have all steel gears.

²⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

³⁾ L2 - 0,8 mm, in combination with 3242G...CR, 3257G...CR, 3272G...CR, 3242G...BX4, 3268G...BX4, 3274G...BP4 and 4221G...BXT R/H.

L2 - 5 mm, in combination with 3863A...CR and 3890A...CR.

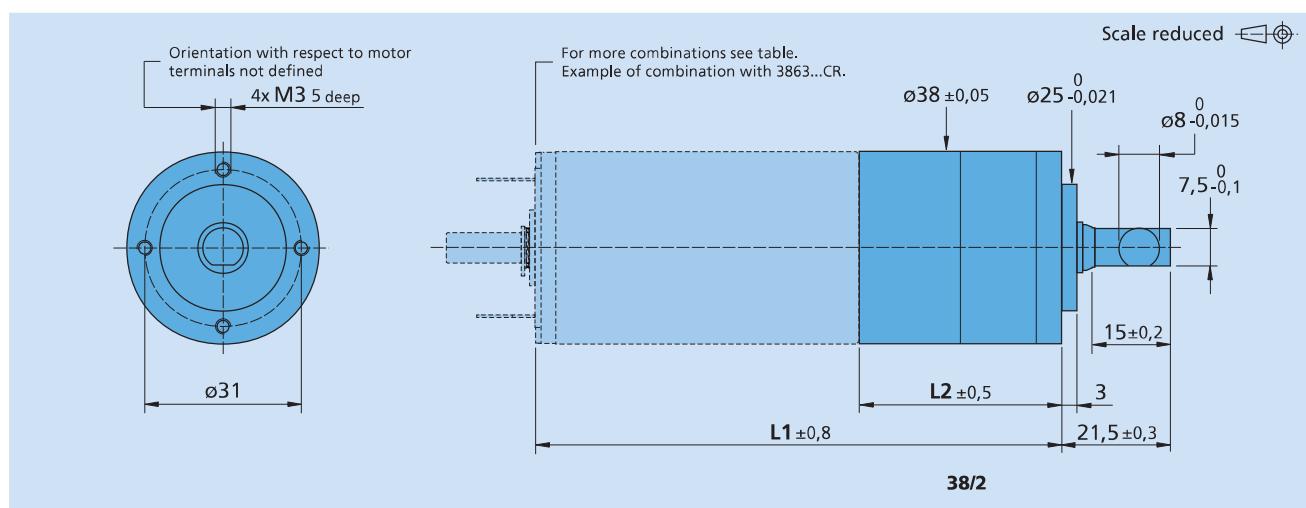

Planetary Gearheads

10 Nm

For combination with
DC-Micromotors
Brushless DC-Motors

Series 38/2 S


	38/2 S			
Housing material	metal			
Geartrain material	steel			
Recommended max. input speed for:				
– continuous operation	4 000 min ⁻¹			
Backlash, at no-load	$\leq 1^\circ$			
Bearings on output shaft	ball bearings, preloaded			
Shaft load, max.:				
– radial (10 mm from mounting face)	$\leq 300 \text{ N}$			
– axial	$\leq 300 \text{ N}$			
Shaft press fit force, max.	$\leq 350 \text{ N}$			
Shaft play				
– radial (10 mm from mounting face)	$\leq 0,03 \text{ mm}$			
– axial	$\leq 0,15 \text{ mm}$			
Operating temperature range	- 20 ... + 125 °C			
Technical data				
Number of gear stages	2	3	4	5
Continuous torque	Nm	10	10	10
Intermittent torque	Nm	15	15	15
Mass without motor, ca.	g	195	245	296
Efficiency, max.	%	80	70	60
Direction of rotation, drive to output	=	=	=	=
Reduction ratio ¹⁾ (rounded)		14:1 66:1	43:1 159:1 246:1	134:1 592:1 989:1 1 526:1
L2 [mm] = length without motor ²⁾	40,1	47,9	55,7	63,5
L1 [mm] = length with motor	3242G...CR	81,3	89,1	96,9
	3257G...CR	96,3	104,1	111,9
	3272G...CR	111,3	119,1	126,9
	3863A...CR	99,1	106,9	114,7
	3890A...CR	125,1	132,9	140,7
	3056K...B	96,1	103,9	111,7
	3242G...BX4	83,5	91,3	99,1
	3268G...BX4	109,5	117,3	125,1
	3274G...BP4	113,3	121,1	128,9
	3564K...B	104,1	111,9	119,7
	4221G...BXTH	61,3	69,1	76,9
	4221G...BXTR	60,5	68,3	76,1
				83,9

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

²⁾ L2 - 0,8 mm, in combination with 3242G...CR, 3257G...CR, 3272G...CR, 3242G...BX4, 3268G...BX4, 3274G...BP4 and 4221G...BXT R/H.

L2 - 5 mm, in combination with 3863A...CR and 3890A...CR.

Note: The gearheads as S-type have all steel gears and heavy duty lubricant for extended lifetime performance.

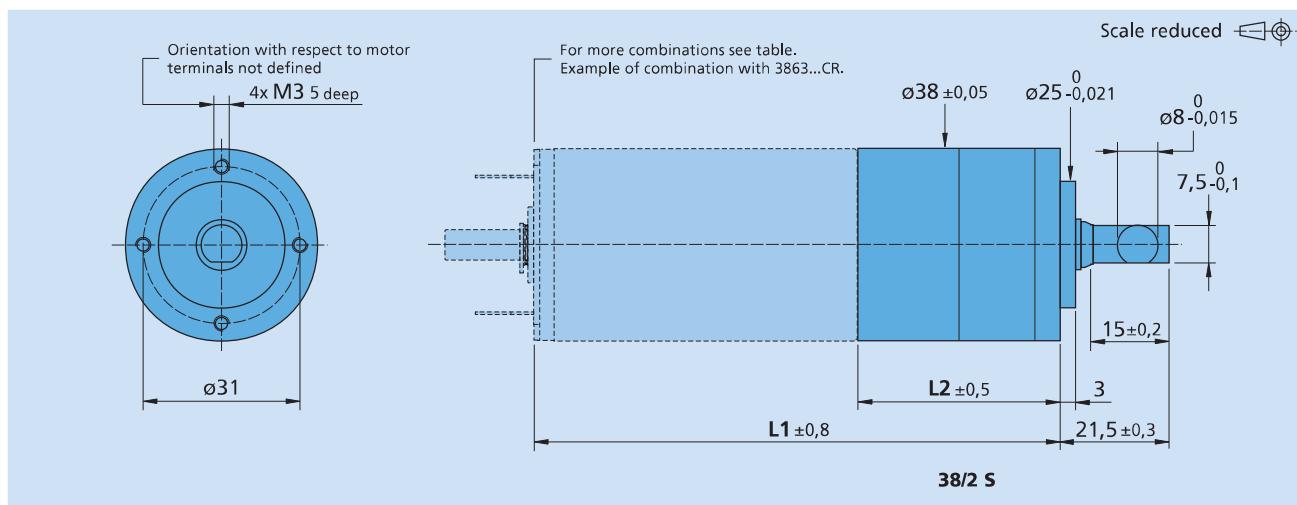

Planetary Gearheads

16 Nm

**For combination with
DC-Micromotors
Brushless DC-Motors**

Series 44/1


	44/1
Housing material	metal
Geartrain material	metal
Recommended max. input speed for:	
– continuous operation	3 500 min ⁻¹
Backlash, at no-load	≤ 1 °
Bearings on output shaft	ball bearings, preloaded
Shaft load, max.:	
– radial (12 mm from mounting face)	≤ 400 N
– axial	≤ 350 N
Shaft press fit force, max.	≤ 500 N
Shaft play	
– radial (12 mm from mounting face)	≤ 0,03 mm
– axial	= 0 mm
Operating temperature range	- 30 ... + 125 °C

Technical data

Technical data		1	2	3	4	5	
Number of gear stages		1	2	3	4	5	
Continuous torque	Nm	16	16	16	16	16	
Intermittent torque	Nm	20	20	20	20	20	
Mass without motor, ca.	g	480	600	720	840	960	
Efficiency, max.	%	90	80	70	65	60	
Direction of rotation, drive to output		=	=	=	=	=	
Reduction ratio ¹⁾ (rounded)		4,8:1	23:1	111:1	531:1	2 548:1	
L2 [mm] = length without motor		62,2	77,8	93,2	108,6	124,0	
L1 [mm] = length with motor	3863H...CR	126,2	141,8	157,2	172,6	188,0	
	3890H...CR	152,2	167,8	183,2	198,6	214,0	
	4490H...B/BS	152,2	167,8	183,2	198,6	214,0	

Precision
earheads

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

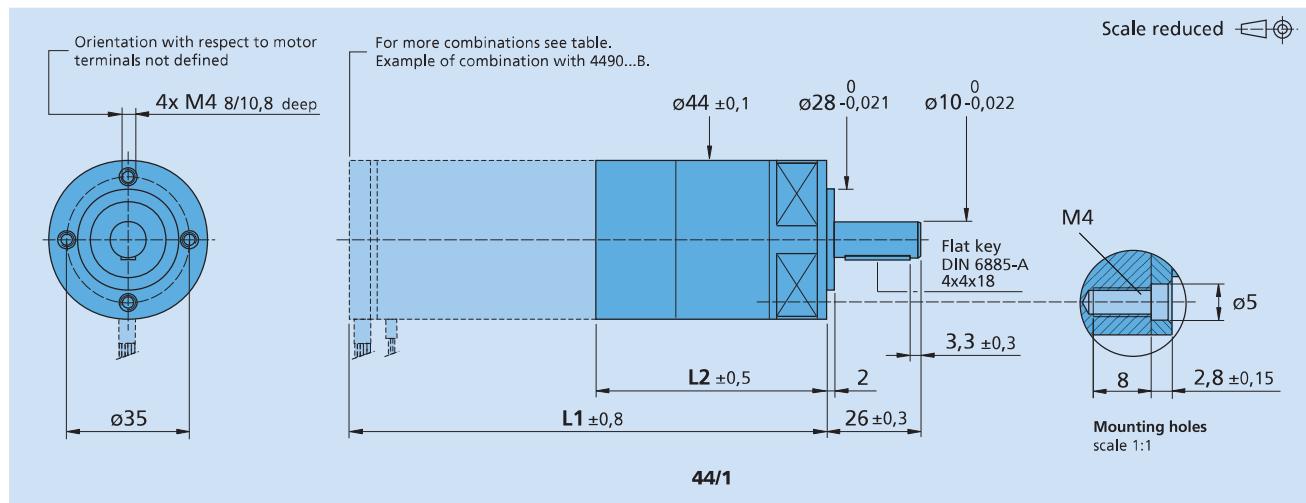

Planetary Gearheads

The GPT planetary gearheads exhibit high torque and enhanced input speed in compact dimensions. Their improved efficiency and numerous reduction ratios uniformly distributed help to exploit the maximum motor power.

Their geartrain is designed for robustness to sustain intermittent or sudden load changes. Depending on the diameter size, these gearheads can sustain input speed up to 20.000 min⁻¹ or output torque up to 25 Nm when operating in intermittent cycles. The GPT product family is also particularly suited for accurate positioning applications granted by a low backlash characteristic.

These gearheads can be combined with an extensive range of DC or brushless motors and they come with various shaft configurations to adapt to many applications. They are ideal for different types of robots – inspection, assembly, rehabilitation or exoskeletons – as well as for production and laboratory automation, for packaging machines, measurement and testing equipment or for semiconductor handling.

Series

22GPT	32GPT
42GPT	

Key Features

Gearhead diameter	22 ... 42 mm
Material	stainless steel
Continuous torque	0,45 ... 18 Nm
Continuous input speed	up to 15.000 min ⁻¹
Intermittent torque	0,6 ... 25 Nm
Intermittent input speed	up to 20.000 min ⁻¹
Radial load	up to 390 N
Reduction ratio	from 3:1 up to 1294:1



22GPT 89:1 KS1


Product Code

22	Gearhead diameter
GPT	Product family
89:1	Reduction ratio
KS1	Standard options

FAULHABER GPT

Advantages of this series at a glance

- Compact length
- High continuous torque
- Very robust for intermittent or impulsive cycles
- High intermittent speed up to 20.000 min⁻¹
- Reduced backlash
- Many reduction ratios
- Large selection of motor combinations
- Many standard options

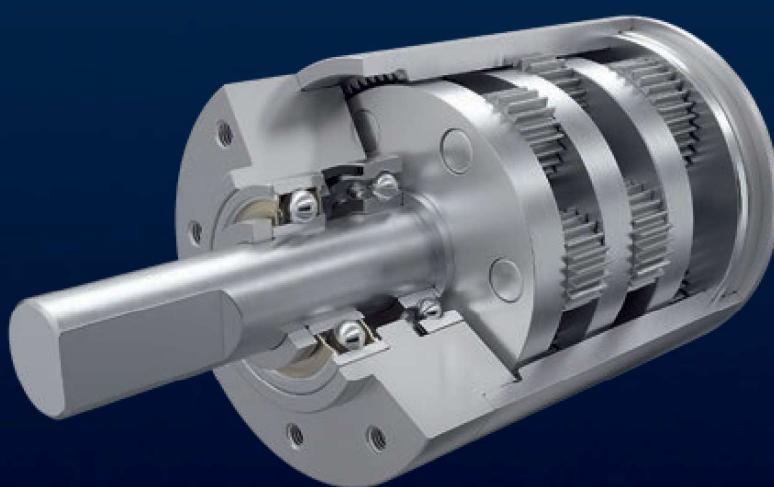

Precision Gearheads

Technical Information

General information

The FAULHABER GPT metal planetary gearhead series are designed to provide high torque in compact dimensions, they can support large input speeds and are suited for a wide range of applications like robotics, industrial machines and laboratory equipment. The GPT product family is designed to leverage at best the maximum power of FAULHABER DC-Micromotors and Brushless DC-Servomotors. Besides high torque performance, GPT series are also particularly well suited for positioning applications granted by their low backlash characteristics.

On top of optimizing performance for continuous operation, GPT series are also designed to sustain strong torque impulses and large speed variations when used in intermittent cycles. A large number of reduction ratios uniformly distributed are available to select the most appropriate configuration to fit various torque or speed operating points required by the application.

A large selection of options are available to match different ambient conditions and make the mechanical integration inside applications faster and smoother through various shaft configurations.

The main advantages of the GPT series are:

- compactness with short length
- high torque and high inputs speeds
- very robust with high intermittent or impulsive torque
- many reduction ratios
- minimum backlash
- high efficiency
- different shaft configurations
- large selection of motors combinations

Service Life

The operational lifetime of a reduction gearhead and motor combination is determined by:

- input speed and output torque, resulting in output power
- motor operating temperature
- operation mode (continuous, intermittent or impulsive) and duty cycle
- output shaft load (radial or axial load)
- operating conditions like temperature, dust and other ambient conditions
- environment and integration into other systems

Since a multitude of parameters prevail in any application, it is nearly impossible to state the actual lifetime that can be expected from a specific type of gearhead or motor-gearhead combination. A number of options to the standard reduction gearheads are available to increase life performance: ball bearings, different lubrication etc.

Bearings – Lubrication

Gearheads are available with different bearings to meet various requirements. Where indicated, ball bearings are preloaded with spring washers of limited force to avoid excessive current consumption.

A higher axial shaft load than specified in the data sheets will neutralize the preload on the ball bearings.

All bearings are lubricated for life. Relubrication is not necessary and not recommended. The use of non-approved lubricants on or around the gearheads or motors can negatively influence the function and life expectancy.

The standard lubrication of the reduction gears is such as to provide optimum life performance at minimum current consumption at no-load conditions. Special lubricated gearheads are available for operation at extended temperature environments and under vacuum.

Operating limits

In order to avoid short service life or early damage, gearheads are intended to be used within the following limits:


- maximum output torque
- and maximum input speed
- and maximum output power

Values at 22°C			
Number of gear stages	1	2	2
Reduction ratio (rounded) ¹⁾	3:1 3,6:1 4,5:1 6,6:1	9:1	11:1 14:1 16:1 20:1 24:1 30:1 44:1
Continuous torque, max.	Nm	0,45	0,8
Intermittent torque, max.	Nm	0,6	1,1
Peak torque	Nm	1	2,5
Continuous input speed, max.	min ⁻¹	9 000	10 000
Intermittent input speed, max.	min ⁻¹	11 000	12 000
Continuous output power, max.	W	21	12
Intermittent output power, max.	W	30	18
Efficiency, max.	%	92	84

An important aspect to consider is that gearhead cannot operate simultaneously at maximum output torque and maximum input speed, such operating condition would result in a power transmission generating excessive heat dissipation and would degrade significantly service life. For such reason, a limitation relative maximum output power is also specified in the datasheet.

These speed, torque and power limits are specified to different values depending on the operating mode, either continuous operation or intermittent operation, for which intermittent operation refers to an operating duty cycle of 20% on-time.

Those limits are represented in a graphical form to illustrate the recommended area of operations for continuous and intermittent operations. Such graph reports the output speed versus output torque on both logarithmic scales.

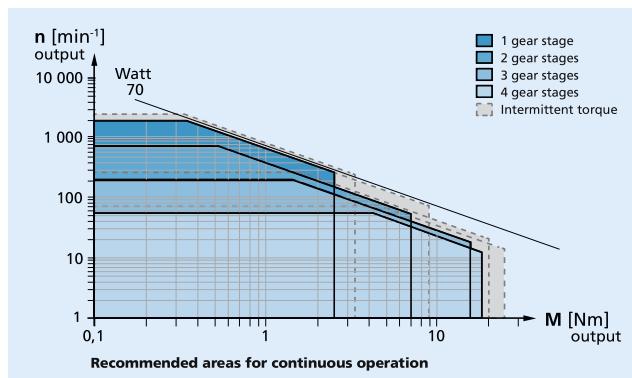

The limits also vary depending on the number of reduction stages and is also depending on the reduction ratio as expressed in the datasheet through the various columns reporting performance based on reduction ratios.

These limit values are referring to the only gearhead for ambient temperature around 22°C and do not consider any external effects relative to the gearhead. Ambient conditions, influence of integration in the system application and motor behavior like motor temperature are not considered when defining those maximum operating limits.



Efficiency

Datasheets report the maximum efficiency of the gearhead based on its configuration as per number of stage and reduction ratio. Such efficiency value refers only to continuous operation mode.

Intermittent output power, max.	VV	30	18	18
Efficiency, max.	%	92	84	82

Such maximum efficiency occurs on a specific operating point in terms of speed and torque and it depends also on the gearhead configuration and on the specific reduction ratio.

For each specific configuration, the gearhead efficiency varies with speed and torque. The following graph reports the typical behavior of gearhead efficiency.

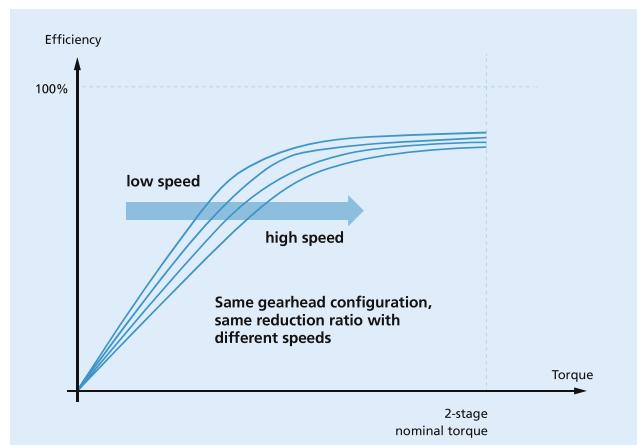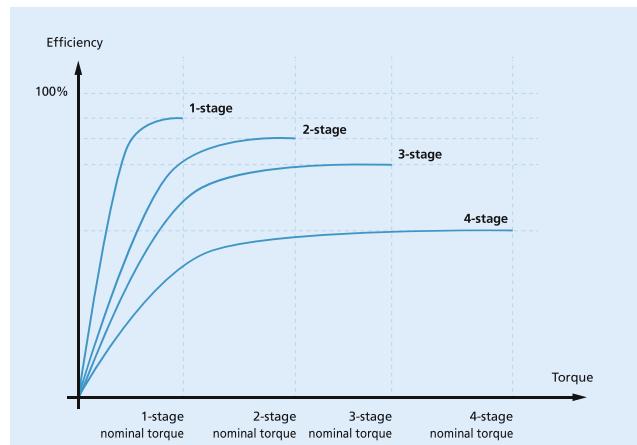

In order to achieve a good efficiency the gearhead should ideally be used at torque level above 30% of nominal torque. The primary parameter to ensure good efficiency is torque while speed affect also efficiency but a minor proportion. To provide good efficiency a gearhead should not be used at low torque and high speed.

Besides motor current consumption, the impact of efficiency is related to heat dissipation inside the gearhead which also depends on the input power transmitted by the motor. Such heat dissipation is increasing gearhead temperature and contribute to degrade lubricant over time, impacting thus service life.

Precision Gearheads

Technical Information

Motor Combinations

GPT gearhead series can be combined with a wide range of DC motors, 4-pole and 2-pole brushless motors, for smaller diameter size also combination with stepper motors are available. This gearhead series are optimized to leverage at best the torque and speed range of the different FAULHABER motor families.

Combinations with motors come assembled from the factory. Motor-gearhead combination cannot be assembled other than on the factory line.

When combining a motor with GPT gearhead series, the motor should be selected with enough performance capabilities to avoid bringing the motor at a too high steady temperature. Such high temperatures would produce extra heat transfer towards the gearhead and could degrade prematurely the lubricant, thus impacting service life of the combination unit.

To achieve long service life, a general guideline is to ensure that the motor won't exceed a temperature of 60°C to 70°C at steady state during operation. Such motor temperatures will avoid premature degradation of lubricant inside the gearhead.


Modifications and standard options

GPT gearhead series are available with a big range of standard options and modifications. Some of these options are made available to match particular requirements related to specific applications with special ambient conditions, others are made to ease the product integration inside the application system, others to enhance particular performance parameters for specific needs.

Such product options refers to:

- output shaft shape and dimensions
- ambient conditions like particular temperature range or special environmental conditions as vacuum.
- different motor cable or terminals orientation when integrating the combination unit inside the application
- other requirements related to output load fixed on the output shaft

Most options are modifying the basic product so that characteristics will differ from the performance of the standard version. This latest aspect should be considered when selecting an option and eventual questions should be addressed to your local sales representative.

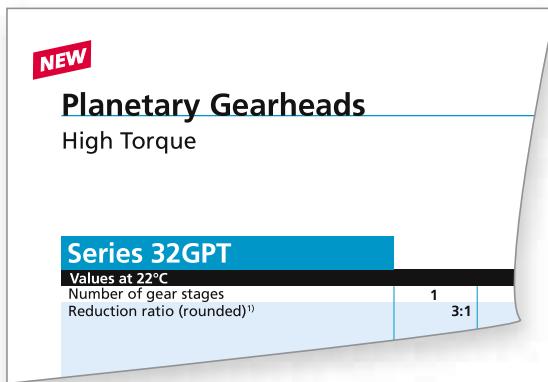

Notes on technical datasheet

Unspecified tolerances

Tolerances in accordance with ISO 2768 medium.

≤ 6	=	$\pm 0,1$ mm
≤ 30	=	$\pm 0,2$ mm
≤ 120	=	$\pm 0,3$ mm

Reduction ratio

The listed ratios are nominal values only, the exact ratio for each reduction gearhead can be calculated by means of the stage ratio applicable for each type.

Output torque

Continuous operation: The continuous torque provides the maximum possible load applied to the output shaft; exceeding this value will reduce the service life.

Intermittent operation: The intermittent torque value may be applied for a short period. It should be for short intervals only and not exceed 20% of the continuous duty cycle.

Peak torque: This torque limit represents the absolute maximum torque supported by the gearhead for unexpected events generated randomly on the output shaft load. Such peak torque cannot occur in cyclic mode or in a timely repetitive manner. This parameter is not intended to be used as a dimensioning constraints to drive any loads. Gearhead output is able to support such torque value with a non-repetitive scheme few hundreds to few thousand times during its operation without impacting service life.

Input speed

Continuous operation: The recommended maximum input speed for continuous operation serves as a guideline. It is possible to operate the gearhead at higher speeds. However, to obtain optimum life performance in applications that require continuous operation and long life, the recommended speed should be considered.

Intermittent operation: The intermittent input speed value may be applied for a short period. It should be for short intervals only and not exceed 20% of the continuous duty cycle. Operating gearhead at speeds higher than intermittent maximum value is not recommend as it will reduce significantly service life, and in some cases it could generate early damage with abrupt stop.

Output Power

Continuous operation: The recommended maximum output power for continuous operation serves as a guideline. It is possible to operate the gearhead momentarily with higher output power for brief period. However, to obtain optimum life performance in applications that require continuous operation and long life, the recommended continuous output power should be considered.

Intermittent operation: The intermittent output power value may be applied for a short period. It should be for short intervals only and not exceed 20% of the continuous duty cycle. Operating gearhead at higher power than intermittent maximum value is not recommend as it will reduce drastically service life.

Efficiency

The maximum efficiency refers to the continuous operation mode. Such value varies depending on the number of stages and could also depend on the reduction ratio. The gearhead efficiency varies depending on the speed-torque operating point. For low torque value below 30% of nominal torque, efficiency could be significantly reduced. Efficiency varies in minor proportion with speed, at highest speed efficiency is slightly reduced.

Input inertia

Maximum input inertia can be used to determine the necessary torque required to ensure a particular acceleration of the geartrain typically for positioning applications with high dynamics. Such inertia value is referred to the gearhead input at the motor output shaft and including the motor pinion. Such value is depending on the geartrain configuration (e.g.: number of satellite gears), the number of stage and thus on the reduction ratio also. The reported value is the maximum one considering the various possible configuration of the geartrain.

Precision Gearheads

Technical Information

Torsional stiffness

Torsional stiffness represents the angular rigidity of the whole geartrain including the output shaft. This parameter is reporting the output torque necessary to twist the output shaft by one degree when the gearhead input is fixed. This is a typical measured on several samples.


Backlash

Backlash: Backlash is defined by the amount by which the width of a tooth space exceeds the width of the engaging tooth on the pitch circle. Backlash is not to be confused with elasticity or torsional stiffness of the system.

The general purpose of backlash is to prevent gears from jamming when making contact on both sides of their teeth simultaneously. A small amount of backlash is desirable to provide for lubricant space and differential expansion between gear components. The backlash is measured on the output shaft, at the last geartrain stage.

Backlash represent the angular play of the whole geartrain when rotating the gearhead output shaft with no load while the gearhead input is fixed. Such angular play consider the angle between both clockwise and counterclockwise end positions of the output shaft, without applying torque. This reported value is typical measured on several samples.

Backlash under load: The backlash under load between 2 angular positions is depending on the torque load in the CW and CCW directions for those respective positions. Such backlash is the sum of the backlash at no-load and the contribution of the torsional stiffness depending the torque values in these 2 load positions as illustrated the graph below:

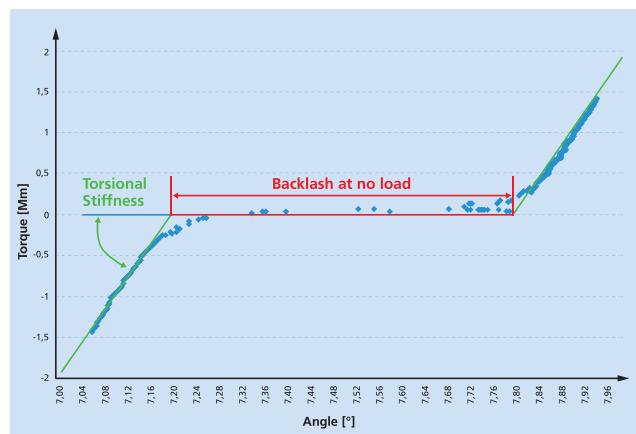

Shaft load

Radial load: The maximum output shaft load represents the maximum dynamic load (when output shaft is rotating) that can be applied radially at a particular distance from the output flange and that the gearhead ball bearing system can support without impacting the service life. In case the radial load would be applied at another distance this value should be extrapolated appropriately.

Axial load: The maximum axial load is the maximum dynamic load (when output shaft is rotating) when pressing the shaft towards the inner side of the gearhead without damaging prematurely the bearing system and without impacting service life.

Shaft press fit force

The press fit force is the maximum static force that can be axially applied to gearhead output shaft in order to mount a coupling element, for example a pulley or a pinion. This is a static force while the geartrain is stand-still and not rotating. Please note that this force does not refer to any operating conditions of the gearhead when used inside the application.

Shaft play

Radial Play: The radial play is the maximum clearance that the output shaft can move radially when measured at a specific distance from the front flange. Such radial play measure depends on the position of measurement along the shaft and on the force used for measurement. The radial play value assumes that maximum force reported in the datasheet will not exceed the maximum radial load.

Axial Play: The axial play on the gearhead output shaft is the maximum distance that the output shaft move in the axial direction when pushing the shaft towards the inner side of the gearhead. Such axial play value depends on the ball bearing system and the relative preload design. The axial play assumes that maximum axial load force reported in the datasheet is not exceeded. When pulling the shaft in the direction out from the gearhead, a minimum play is required to avoid ball bearings to jam, such play in pull direction depends on the bearing preload design.

Operating temperature range

Standard range as listed on the data sheets. Service lifetime is also influenced by the operating temperature, especially for high temperature above 70°C.

Special executions for extended temperature range available on request.

Direction of rotation, reversible


All gearheads are designed for clockwise and counter-clockwise rotation. The indication refers to the direction of rotation as seen from the shaft end, with the motor running in a clockwise direction.

Ball bearings

Ratings on load and lifetime, if not stated, are according to the information from the ball bearing manufacturers.

Length

The length L_2 without motor reported in the datasheet is the length of the stand-alone gearhead excluding any adaptation flange. The length L_1 with motor is reporting the total length of the combination including the motor, the coupling flange and the gearhead.

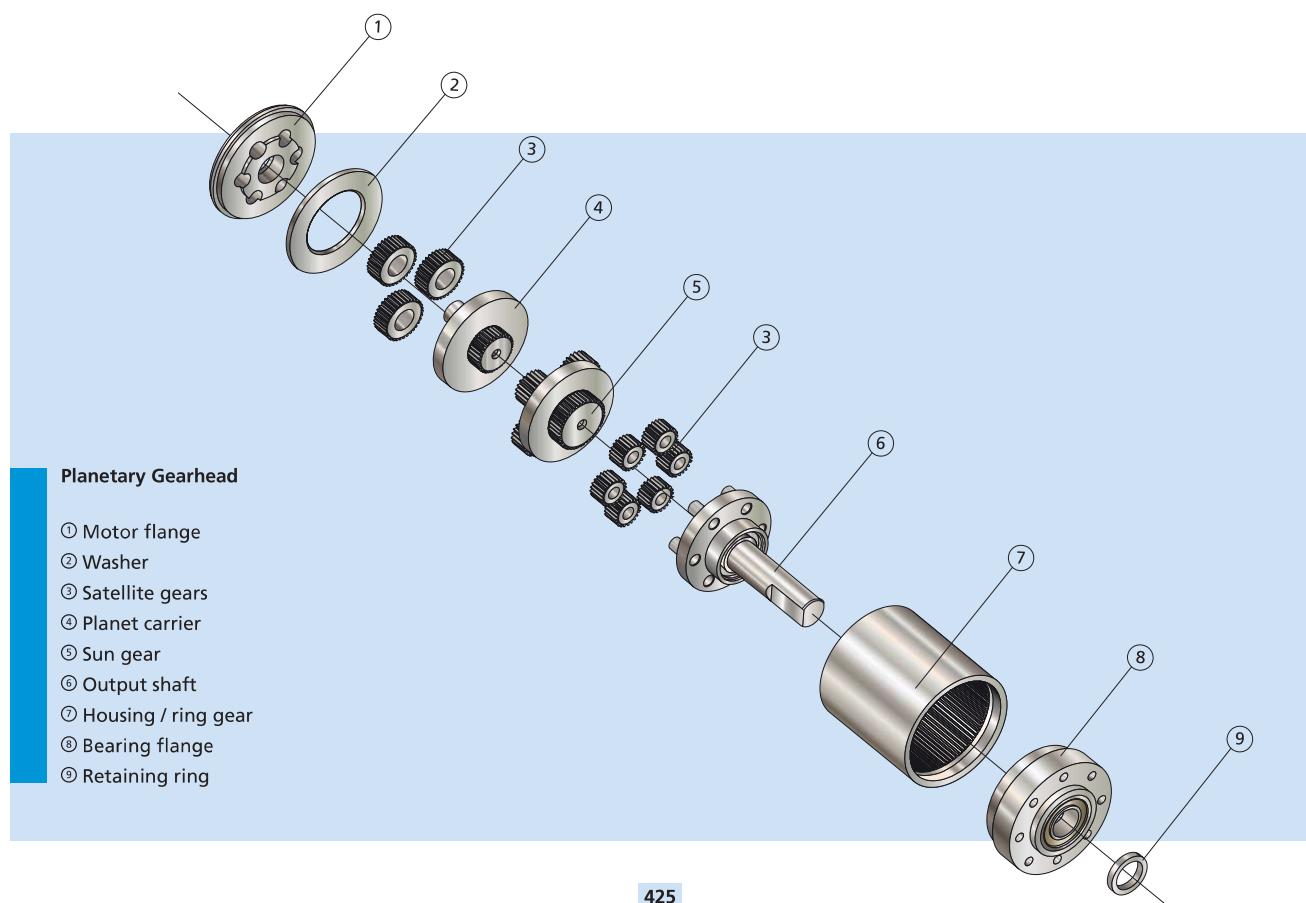

NEW

Planetary Gearheads

High Torque

1,8 Nm

15 000 min⁻¹

Series 22GPT

Values at 22°C


Number of gear stages	1	2	2	3	4	4	
Reduction ratio (rounded) ¹⁾	3:1 3,6:1 4,5:1 6,6:1	9:1	11:1 14:1 16:1 20:1 24:1 30:1 44:1	41:1 49:1 59:1 72:1 89:1 108:1 131:1 158:1 196:1	178:1 215:1 267:1 323:1 401:1 474:1 588:1 862:1	711:1 1042:1 1294:1	
Continuous torque, max.	Nm	0,45	0,8	0,8	1,3	1,8	1,4
Intermittent torque, max.	Nm	0,6	1,1	1,1	1,8	2,5	2,0
Peak torque	Nm	1	2,5	2,5	3,5	4,5	4,0
Continuous input speed, max.	min ⁻¹	9 000	10 000	12 000	15 000	15 000	15 000
Intermittent input speed, max.	min ⁻¹	11 000	12 000	15 000	20 000	20 000	20 000
Continuous output power, max.	W	21	12	12	8	7	7
Intermittent output power, max.	W	30	18	18	12	10	10
Efficiency, max.	%	92	84	82	78	65	65
Input inertia with pinion, max.	gmm ²	75	78	50	34	14	13
Torsional stiffness, typical	Nm/ [°]	6	11	11	11	11	11
Backlash, at no-load, typical	°	0,8	0,8	0,8	0,8	0,8	0,8
Shaft load, max:							
– radial (10 mm from mounting face)	N	65	90	90	120	150	150
– axial	N	60	85	85	110	140	140
Shaft press fit force, max	N	150	150	150	150	150	150
Shaft play:							
– radial (10 mm from mounting face)	mm	≤ 0,05	≤ 0,05	≤ 0,05	≤ 0,05	≤ 0,05	≤ 0,05
– axial	mm	= 0	= 0	= 0	= 0	= 0	= 0
Length without motor (L2)	mm	18,1	24,5	24,5	30,8	37,2	37,2
Mass without motor and flange	g	51	66	66	82	97	97
Operating temperature	°C	-30 ... +120					
Direction of rotation, drive to output		=					
Housing material		stainless steel					
Geartrain material		stainless steel					
Bearings on output shaft		ball bearings, preloaded					


¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.

Note:

The display shows the range of possible operation points of the drives at a given ambient temperature of 22°C.

The diagram indicates the recommended output speed in relation to the available torque at the output shaft.

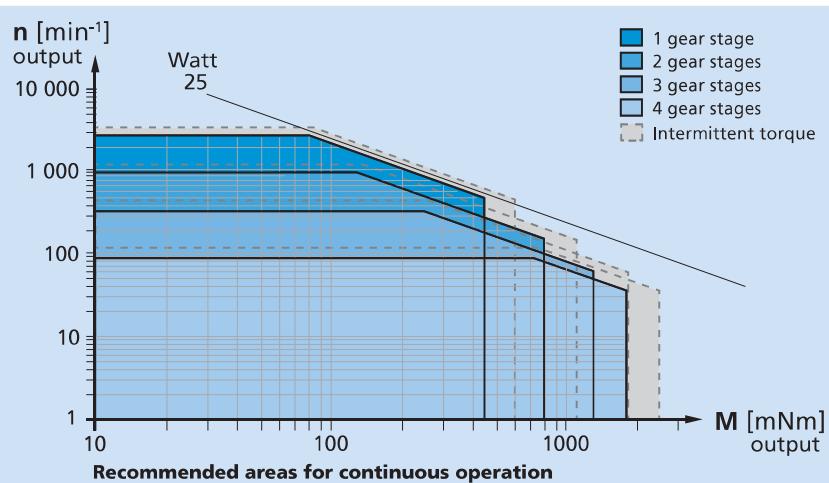

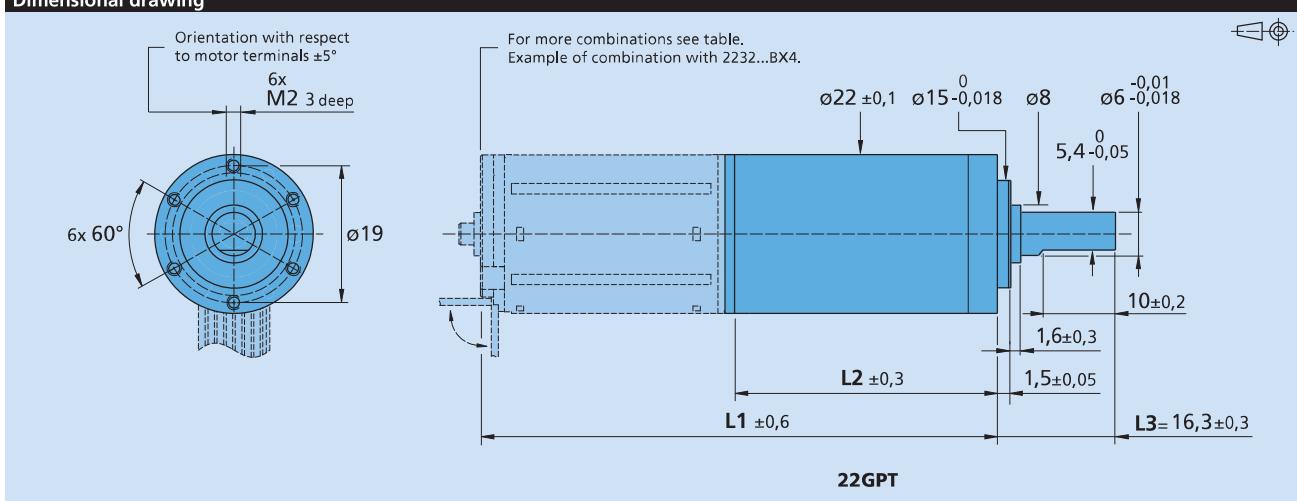Dimensional drawing

Option information

 Example product designation: **22GPT 89:1 KS6KL1**

Option	Type	Description
KS1	Output shaft	Round plain shaft, L3 = 16,3 mm
KS2	Output shaft	Longer round plain shaft, L3 = 27 mm
KS3	Output shaft	Shaft with double flat shape of 12 mm length on opposite sides, L3 = 21 mm
KS4	Output shaft	Shaft with key DIN 6885-A with dimensions 2x2x12 mm, L3 = 21 mm
KS5	Output shaft	Shaft with 12 mm single flat shape, L3 = 21 mm
KS6	Output shaft	Shaft with 12 mm single flat shape and 2 mm cross bore at 6 mm of shaft end, L3 = 21 mm
KS7	Output shaft	Shaft with 10 mm single flat shape and M2,5 axial threaded hole, L3 = 16,3 mm
KS8	Output shaft	Shaft with fork shape of 2 mm width opening, L3 = 16,3 mm
KL1	Ambient conditions	Low temperature range of -55°C ... $+100^\circ\text{C}$
KL2	Ambient conditions	Vacuum down to 10^{-5} Pa @ 22°C
KL3	Ambient conditions	Temperature range of -55°C ... $+150^\circ\text{C}$ and vacuum down to 10^{-9} Pa @ 60°C
KC1	Cable orientation	Motor cable/wires or terminals oriented at 15° CCW vs gearhead front threads
KC2	Cable orientation	Motor cable/wires or terminals oriented at 30° CCW vs gearhead front threads
KC3	Cable orientation	Motor cable/wires or terminals oriented at 45° CCW vs gearhead front threads

Note: Specified values may differ from the standard values depending on the option.
Please consult your sales representative for further information.

Product combination

Number of Stages	1	2	3	4
L2 [mm] = length without motor	18,1	24,5	30,8	37,2
L1 [mm] = length with motor	2224U...SR	45,1	51,4	57,8
	2232U...SR	53,1	59,4	65,8
	2237U...CXR	57,9	64,2	70,6
	2342X...CR	61,8	68,2	74,5
	2642X...CXR/CR	65,2	71,6	77,9
	2657X...CXR/CR	80,2	86,6	92,9
	2668X...CR	91,2	97,6	103,9
	2232X...BX4	53,6	60,0	66,3
	2250X...BX4	71,6	78,0	84,3
	2264X...BP4	87,2	93,6	99,9
	2214X...BXT H	34,6	41,0	47,3
	2214X...BXT R	33,8	40,2	46,5
	2036U...B	56,9	63,2	69,6
	2057X...B	76,8	83,2	89,5
	2444X...B	63,8	70,2	76,5
	AM2224-10	48,6	54,9	61,3

NEW

Planetary Gearheads

High Torque

8 Nm

11 000 min⁻¹

Series 32GPT

Values at 22°C


Number of gear stages	1	1	2	2	3	4	4	
Reduction ratio (rounded) ¹⁾	3:1	3,6:1 4,5:1 6,6:1	9:1 11:1	14:1 16:1 20:1 24:1 30:1 44:1	41:1 49:1 59:1 72:1 89:1 108:1 131:1 158:1 196:1	178:1 215:1 267:1 323:1 401:1 474:1 588:1 862:1	711:1 1042:1 1294:1	
Continuous torque, max.	Nm	1,0	1,0	3,0	3,0	5,0	8,0	6,0
Intermittent torque, max.	Nm	1,3	1,3	4,0	4,0	7,0	10	7,2
Peak torque	Nm	2	2	6,5	6,5	10	13	10
Continuous input speed, max.	min ⁻¹	6 500	8 000	6 500	10 000	11 000	11 000	11 000
Intermittent input speed, max.	min ⁻¹	7 500	9 500	7 500	12 500	14 000	14 000	14 000
Continuous output power, max.	W	40	40	21	21	14	12	12
Intermittent output power, max.	W	55	55	30	30	20	15	15
Efficiency, max.	%	93	93	89	89	80	65	65
Input inertia with pinion, max.	gmm ²	410	274	434	195	196	83	75
Torsional stiffness, typical	Nm/ ^o	12	12	16	16	16	16	16
Backlash, at no-load, typical	°	0,6	0,6	0,6	0,6	0,6	0,6	0,6
Shaft load, max:								
– radial (10 mm from mounting face)	N	140	140	180	180	220	300	300
– axial	N	120	120	150	150	180	250	250
Shaft press fit force, max	N	250	250	250	250	250	250	250
Shaft play:								
– radial (10 mm from mounting face)	mm	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07
– axial	mm	= 0	= 0	= 0	= 0	= 0	= 0	= 0
Length without motor (L2)	mm	23,4	23,4	31,8	31,8	40,2	48,6	48,6
Mass without motor and flange	g	180	180	240	240	310	360	360
Operating temperature	°C	-30 ... +120						
Direction of rotation, drive to output		=						
Housing material		stainless steel						
Geartrain material		stainless steel						
Bearings on output shaft		ball bearings, preloaded						

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.


Note:

The display shows the range of possible operation points of the drives at a given ambient temperature of 22°C.

The diagram indicates the recommended output speed in relation to the available torque at the output shaft.

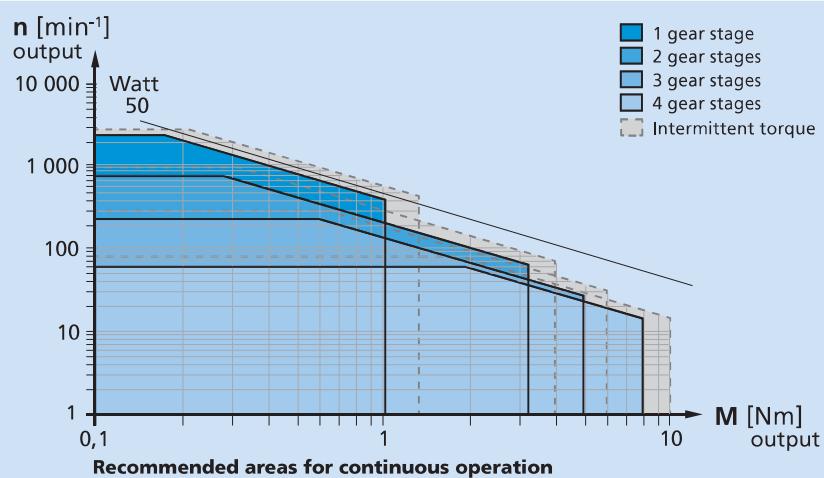

Dimensional drawing

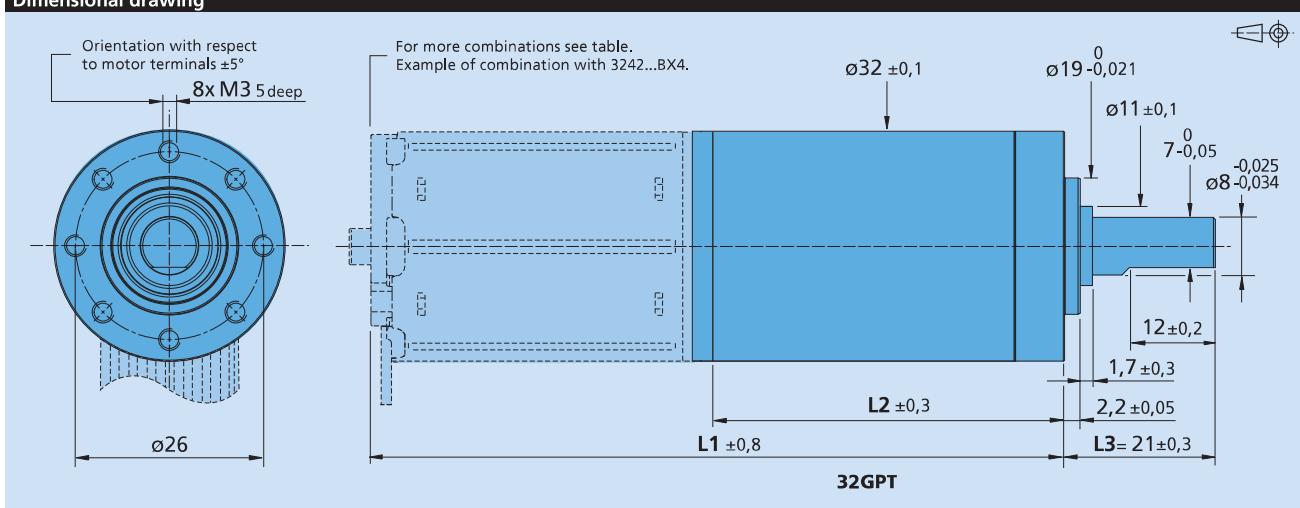

Option information

Example product designation: **32GPT 24:1 KS3KL2**

Option	Type	Description
KS1	Output shaft	Round plain shaft, L3= 21 mm
KS2	Output shaft	Longer round plain shaft, L3= 31 mm
KS3	Output shaft	Shaft with double flat shape of 12 mm length on opposite sides, L3= 21 mm
KS4	Output shaft	Shaft with key DIN 6885-A with dimensions 2x2x12 mm, L3= 21 mm
KS6	Output shaft	Shaft with 12 mm single flat shape and 2 mm cross bore at 6 mm of shaft end, L3= 21 mm
KS7	Output shaft	Shaft with 12 mm single flat shape and M4 axial threaded hole, L3= 21 mm
KS8	Output shaft	Shaft with fork shape of 3 mm width opening, L3= 21 mm
KL1	Ambient conditions	Low temperature range of -55°C ... +100°C
KL2	Ambient conditions	Vacuum down to 10^{-5} Pa @ 22°C
KL3	Ambient conditions	Temperature range of -55°C ... +150°C and vacuum down to 10^{-9} Pa @ 60°C
KC1	Cable orientation	Motor cable/wires or terminals oriented at 15° CCW vs gearbox front threads
KC2	Cable orientation	Motor cable/wires or terminals oriented at 30° CCW vs gearbox front threads

Note: Specified values may differ from the standard values depending on the option.
Please consult your sales representative for further information.

Product combination

Number of Stages	1	2	3	4	
L2 [mm] = length without motor	23,4	31,8	40,2	48,6	
L1 [mm] = length with motor	2642X...CXR/CR 2657X...CXR/CR 2668X...CR 3242X...CR 3257X...CR 3272X...CR 2250X...BX4 3242X...BX4 3268X...BX4 2264X...BP4 3274X...BP4 3056X...B 3564X...B 3216X...BXT H 3216X...BXT R	68,3 83,3 94,3 68,3 83,3 98,3 78,1 70,5 96,5 90,3 104,4 82,3 90,3 43,1 42,3	76,7 91,7 102,7 76,7 91,7 106,7 86,5 78,9 104,9 98,7 112,8 90,7 98,7 51,5 50,7	85,1 100,1 111,1 85,1 100,1 115,1 94,9 87,3 113,3 107,1 121,2 99,1 107,1 59,9 59,1	93,5 108,5 119,5 93,5 108,5 123,5 103,3 95,7 121,7 115,5 129,6 107,5 115,5 68,3 67,5

NEW



Planetary Gearheads

High Torque

18 Nm

10 000 min⁻¹

Series 42GPT

Values at 22°C


Number of gear stages	1	1	2	2	2	3	4	4	
Reduction ratio (rounded) ¹⁾	3:1	3,6:1 4,5:1 6,6:1	9:1	11:1	14:1 16:1 20:1 24:1 30:1 44:1	41:1 49:1 59:1 72:1 89:1 108:1 131:1 158:1 196:1	178:1 215:1 267:1 323:1 401:1 474:1 588:1 862:1	711:1 1042:1 1294:1	
Continuous torque, max.	Nm	2,5	2,5	7	7	7	15,5	18	15
Intermittent torque, max.	Nm	3,3	3,3	9	9	9	20	25	20
Peak torque	Nm	4	4	11,5	11,5	11,5	25	34	30
Continuous input speed, max.	min ⁻¹	5 000	7 000	5 000	7 000	10 000	10 000	10 000	10 000
Intermittent input speed, max.	min ⁻¹	7 000	9 000	8 000	8 000	13 000	13 000	13 000	13 000
Continuous output power, max.	W	60	60	40	40	40	30	23	23
Intermittent output power, max.	W	90	90	65	65	65	45	35	35
Efficiency, max.	%	93	93	86	86	86	80	74	74
Input inertia with pinion, max.	gmm ²	2000	1 330	2 000	2 000	920	920	400	355
Torsional stiffness, typical	Nm/ [°]	14	14	22	22	22	22	22	22
Backlash, at no-load, typical	°	0,4	0,4	0,4	0,4	0,4	0,4	0,4	0,4
Shaft load, max:									
– radial (15 mm from mounting face)	N	200	200	280	280	280	310	390	390
– axial	N	170	170	200	200	200	230	250	250
Shaft press fit force, max	N	250	250	250	250	250	250	300	300
Shaft play:									
– radial (15 mm from mounting face)	mm	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07	≤ 0,07
– axial	mm	= 0	= 0	= 0	= 0	= 0	= 0	= 0	= 0
Length without motor (L2)	mm	30,8	30,8	43,2	43,2	43,2	55,7	68,1	68,1
Mass without motor and flange	g	310	310	420	420	420	530	640	640
Operating temperature	°C	-30 ... +120							
Direction of rotation, drive to output		=							
Housing material		stainless steel							
Geartrain material		stainless steel							
Bearings on output shaft		ball bearings, preloaded							

¹⁾ The reduction ratios are rounded, the exact values are available on request or at www.faulhaber.com.


Note:

The display shows the range of possible operation points of the drives at a given ambient temperature of 22°C.

The diagram indicates the recommended output speed in relation to the available torque at the output shaft.

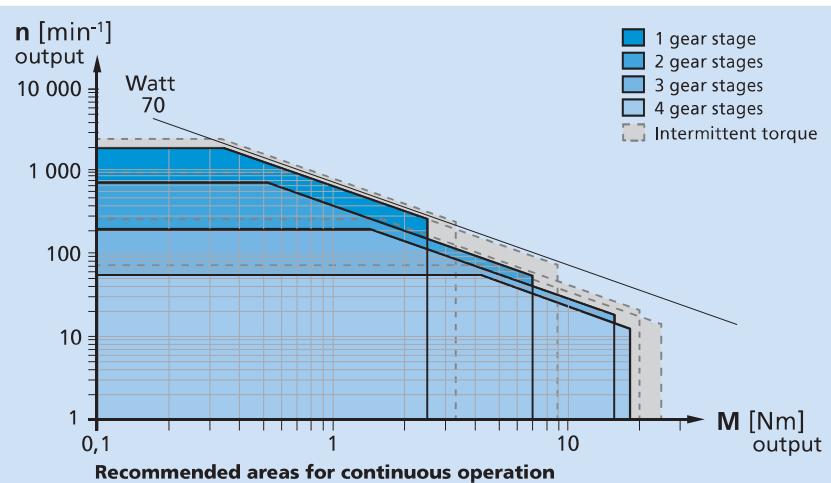

Dimensional drawing

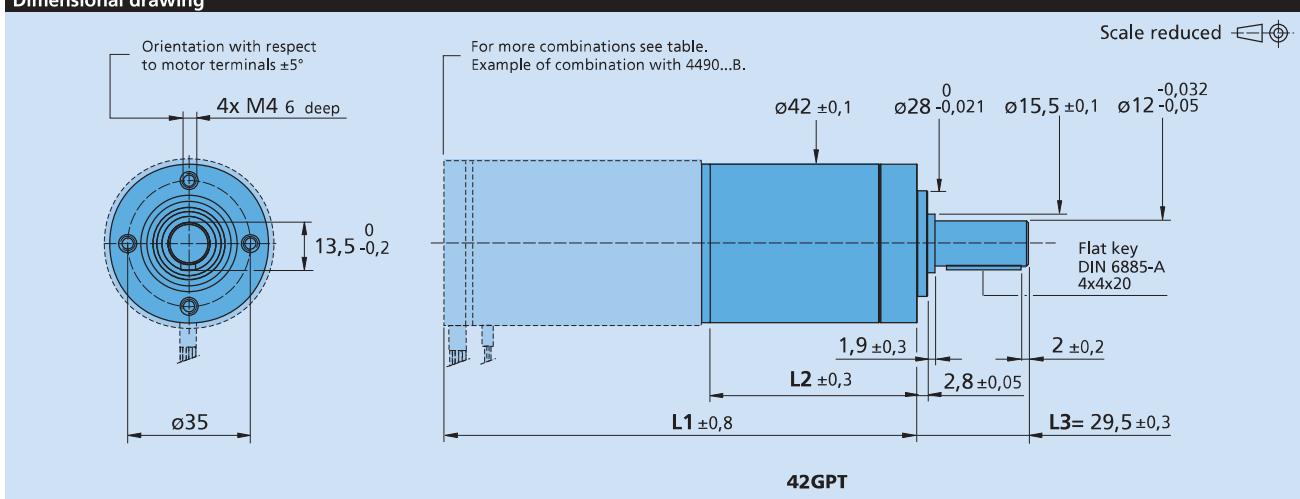

Option information

Example product designation: **42GPT 158:1 KS2KL1**

Option	Type	Description
KS2	Output shaft	Longer round plain shaft, L3= 40 mm
KS7	Output shaft	Shaft with 20 mm single flat shape and M5 axial threaded hole, L3= 29,5 mm
KL1	Ambient conditions	Low temperature range of $-55^\circ\text{C} \dots +100^\circ\text{C}$
KL2	Ambient conditions	Vacuum down to 10^{-5} Pa @ 22°C
KL3	Ambient conditions	Temperature range of $-55^\circ\text{C} \dots +150^\circ\text{C}$ and vacuum down to 10^{-9} Pa @ 60°C
KC1	Cable orientation	Motor cable/wires or terminals oriented at 15° CCW vs gearhead front threads
KC2	Cable orientation	Motor cable/wires or terminals oriented at 30° CCW vs gearhead front threads
KC3	Cable orientation	Motor cable/wires or terminals oriented at 45° CCW vs gearhead front threads
KC4	Cable orientation	Motor cable/wires or terminals oriented at 60° CCW vs gearhead front threads
KC5	Cable orientation	Motor cable/wires or terminals oriented at 75° CCW vs gearhead front threads

Note: Specified values may differ from the standard values depending on the option.
Please consult your sales representative for further information.

Product combination

Number of Stages	1	2	3	4
L2 [mm] = length without motor	30,8	43,2	55,7	68,1
L1 [mm] = length with motor	3242X...CR	76,0	88,4	100,9
	3257X...CR	91,0	103,4	115,9
	3272X...CR	106,0	118,4	130,9
	3863X...CR	98,0	110,4	122,9
	3890X...CR	124,0	136,4	148,9
	3242X...BX4	78,2	90,6	103,1
	3268X...BX4	104,2	116,6	129,1
	3274X...BP4	108,0	120,4	132,9
	4221X...BXT H	56,0	68,4	80,9
	4221X...BXT R	55,2	67,6	80,1
	3564X...B	98,0	110,4	122,9
	4490X...B	124,0	136,4	148,9
				161,3